

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : A61G 5/04, 5/06, B62K 17/00, B60B 19/00		A1	(11) International Publication Number: WO 96/23478
			(43) International Publication Date: 8 August 1996 (08.08.96)
(21) International Application Number: PCT/US95/01522		(81) Designated States: AU, CA, CN, FI, JP, KR, MX, NO, NZ, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 3 February 1995 (03.02.95)		Published With international search report.	
(71) Applicant: DEKA PRODUCTS LIMITED PARTNERSHIP [US/US]; 340 Commercial Street, Manchester, NH 03101 (US).			
(72) Inventors: KAMEN, Dean, L.; 44 Gage Road, Bedford, NH 03102 (US). AMBROGI, Robert, R.; 156 Sagamore Street, Manchester, NH 03104 (US). DUGGAN, Robert, J.; Box 69D RD#2, Old Turnpike Road, Northwood, NH 03261 (US). HEINZMANN, Richard, Kurt; P.O. Box 272, Frankestown, NH 03043 (US). KEY, Brian, R.; 20 Windham Road, Pelham, NH 03076 (US). SKOSKIEWICZ, Andrzej; 797 Mammoth Road #42, Manchester, NH 03104 (US). KRISTAL, Phyllis, K.; 121 North Road, Sunapee, NH 03782 (US).			
(74) Agents: SUNSTEIN, Bruce, D. et al.; Bromberg & Sunstein, 11th floor, 125 Summer Street, Boston, MA 02110-1618 (US).			

(54) Title: TRANSPORTATION VEHICLES AND METHODS

(57) Abstract

There is provided, in a preferred embodiment, a transportation vehicle for transporting an individual over ground having a surface that may be irregular. This embodiment has a support for supporting the subject. A ground-contacting module, movably attached to the support, serves to suspend the subject in the support over the surface. The orientation of the ground-contacting module defines fore-aft and lateral planes intersecting one another at a vertical. The support and the ground-contacting module are components of an assembly. A motorized drive, mounted to the assembly and coupled to the ground-contacting module, causes locomotion of the assembly and the subject therewith over the surface. Finally, the embodiment has a control loop, in which the motorized drive is included, for dynamically enhancing stability in the fore-aft plane by operation of the motorized drive in connection with the ground-contacting module. The ground-contacting module may be realized as a pair of ground-contacting members, laterally disposed with respect to one another. The ground-contacting members may be wheels. Alternatively, each ground-contacting member may include a cluster of wheels. In another embodiment, each ground-contacting member includes a pair of axially adjacent and rotatably mounted arcuate element pairs. Related methods are also provided.

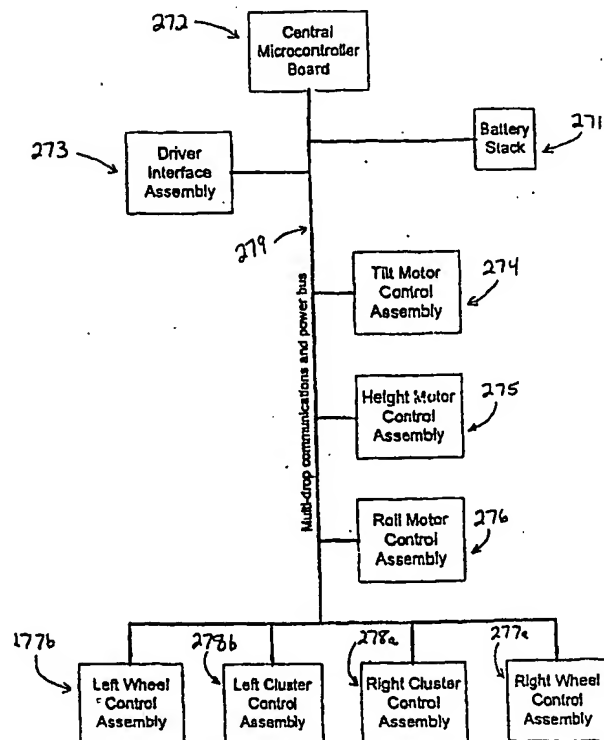




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A61G 5/04, 5/06, B62K 17/00, B60B 19/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 96/23478</b>
			(43) International Publication Date: <b>8 August 1996 (08.08.96)</b>
(21) International Application Number: <b>PCT/US95/01522</b>		(81) Designated States: AU, CA, CN, FI, JP, KR, MX, NO, NZ, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: <b>3 February 1995 (03.02.95)</b>		Published <i>With international search report.</i>	
(71) Applicant: <b>DEKA PRODUCTS LIMITED PARTNERSHIP</b> [US/US]; 340 Commercial Street, Manchester, NH 03101 (US).			
(72) Inventors: <b>KAMEN, Dean, L.</b> ; 44 Gage Road, Bedford, NH 03102 (US). <b>AMBROGI, Robert, R.</b> ; 156 Sagamore Street, Manchester, NH 03104 (US). <b>DUGGAN, Robert, J.</b> ; Box 69D RD#2, Old Turnpike Road, Northwood, NH 03261 (US). <b>HEINZMANN, Richard, Kurt</b> ; P.O. Box 272, Frankestown, NH 03043 (US). <b>KEY, Brian, R.</b> ; 20 Windham Road, Pelham, NH 03076 (US). <b>SHOSKIEWICZ, Andrzej</b> ; 797 Mammoth Road #42, Manchester, NH 03104 (US). <b>KRISTAL, Phyllis, K.</b> ; 121 North Road, Sunapee, NH 03782 (US).			
(74) Agents: <b>SUNSTEIN, Bruce, D. et al.</b> ; Bromberg & Sunstein, 11th floor, 125 Summer Street, Boston, MA 02110-1618 (US).			

(54) Title: **TRANSPORTATION VEHICLES AND METHODS**

## (57) Abstract

There is provided, in a preferred embodiment, a transportation vehicle for transporting an individual over ground having a surface that may be irregular. This embodiment has a support for supporting the subject. A ground-contacting module, movably attached to the support, serves to suspend the subject in the support over the surface. The orientation of the ground-contacting module defines fore-aft and lateral planes intersecting one another at a vertical. The support and the ground-contacting module are components of an assembly. A motorized drive, mounted to the assembly and coupled to the ground-contacting module, causes locomotion of the assembly and the subject therewith over the surface. Finally, the embodiment has a control loop, in which the motorized drive is included, for dynamically enhancing stability in the fore-aft plane by operation of the motorized drive in connection with the ground-contacting module. The ground-contacting module may be realized as a pair of ground-contacting members, laterally disposed with respect to one another. The ground-contacting members may be wheels. Alternatively, each ground-contacting member may include a cluster of wheels. In another embodiment, each ground-contacting member includes a pair of axially adjacent and rotatably mounted arcuate element pairs. Related methods are also provided.

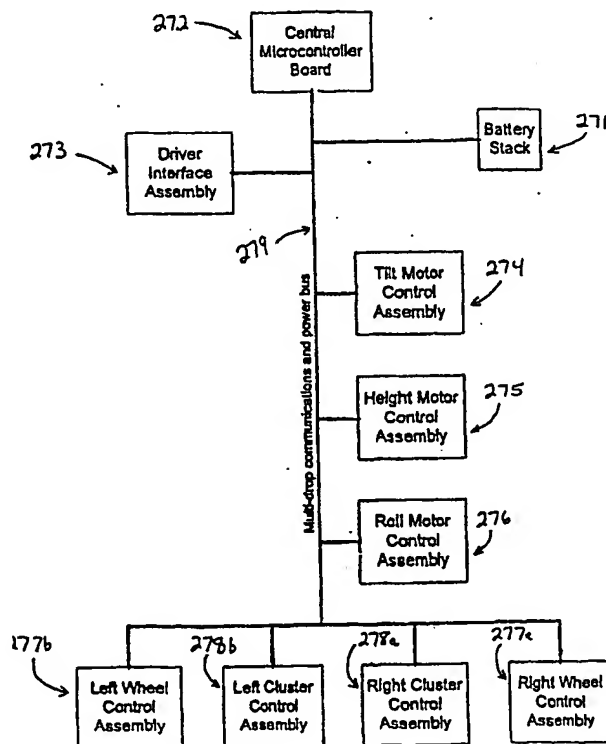

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam



- 1 -

## TRANSPORTATION VEHICLES AND METHODS

5

Technical Field

The present invention pertains to vehicles and methods for transporting individuals, and more particularly to vehicles and methods for transporting  
10 individuals over ground having a surface that may be irregular.

Background Art

A wide range of vehicles and methods are known for transporting human subjects. The design of these vehicles has generally resulted from a compromise that favors stability over maneuverability. It becomes difficult, for example, to  
15 provide a self-propelled user-guidable vehicle for transporting persons over ground having a surface that may be irregular, while still permitting convenient locomotion over ground having a surface that is relatively flat. Vehicles that achieve locomotion over irregular surfaces tend to be complex, heavy, and difficult for ordinary locomotion.

20

Summary of the Invention

The invention provides, in a preferred embodiment, a vehicle for transporting a human subject over ground having a surface that may be irregular. This embodiment has a support for supporting the subject. A ground-contacting module, movably attached to the support, serves to suspend the  
25 subject in the support over the surface. The orientation of the ground-contacting module defines fore-aft and lateral planes intersecting one another at a vertical. The support and the ground-contacting module are components of an assembly. A motorized drive, mounted to the assembly and coupled to the ground-contacting module, causes locomotion of the assembly and the subject therewith.

over the surface. Finally, the embodiment has a control loop, in which the motorized drive is included, for dynamically enhancing stability in the fore-aft plane by operation of the motorized drive in connection with the ground-contacting module.

5 In a further embodiment, the ground contacting module is realized as a pair of ground-contacting members, laterally disposed with respect to one another. The ground-contacting members may be wheels. Alternatively, each ground-contacting member may include a cluster of wheels, each cluster being rotatably mounted on and motor-driven about a common laterally disposed  
10 central axis; each of the wheels in each cluster may be rotatably mounted about an axis parallel to the central axis so that the distance from the central axis through a diameter of each wheel is approximately the same for each of the wheels in the cluster. The wheels are motor-driven independently of the cluster.

In yet another embodiment, each ground-contacting member includes a  
15 pair of axially adjacent and rotatably mounted arcuate element pairs. The arcuate elements of each element pair are disposed transversely at opposing ends of a support strut that is rotatably mounted at its midpoint. Each support strut is motor-driven.

#### Brief Description of the Drawings

20 The invention will be more readily understood by reference to the following description, taken with the accompanying drawings, in which:

Fig. 1 is a perspective view of a simplified embodiment of the present invention, showing a subject seated thereon;

Fig. 2 another perspective view of the embodiment of Fig. 1, showing  
25 further details of the embodiment;

Fig. 3 is a schematic view of the embodiment of Fig. 1, showing the swivel arrangement of this embodiment;

Fig. 4 is a side elevation of the embodiment of Fig. 1 as used for climbing stairs;

30 Fig. 5 is a block diagram showing generally the nature of power and control with the embodiment of Fig. 1;

Fig. 6 illustrates the control strategy for a simplified version of Fig. 1 to achieve balance using wheel torque;

Fig. 7 illustrates diagrammatically the operation of joystick control of the wheels of the embodiments of Fig. 1;

5        Fig. 8 illustrates the procedures utilized by the embodiment of Fig. 1 to ascend and descend stairs;

Figs. 9-21 illustrate embodiments of the invention utilizing a pair of wheel clusters as the ground-contacting members;

Figs. 9-10 show use of a two-wheel cluster design in various positions;

10       Figs. 11-21 show use of a three-wheel cluster design in various positions and configurations;

Figs. 22-24 illustrate an embodiment wherein each ground-contacting member is realized as a plurality of axially adjacent and rotatably mounted arcuate element groups;

15       Figs. 25-26 provide mechanical detail of a three-wheel cluster design for use in the embodiment of Figs. 18-20;

Fig. 27 is a block diagram showing communication among the control assemblies used in the embodiment of Figs. 18-20;

Fig. 28 is a block diagram showing the structure of a generic control  
20       assembly of the type used in the embodiment of Fig. 27;

Fig. 29 is a block diagram providing detail of the driver interface assembly  
273 of Fig. 27;

Fig. 30 is a logical flow diagram followed by the central micro controller board 272 of Fig. 27 in the course of one control cycle;

25       Fig. 31 illustrates variables defining the dimensions of the cluster design of Figs. 11-26 and of a hypothetical stair with respect to which the cluster design will be used for ascent or descent;

Fig. 32 illustrates angle variables pertinent to defining orientation of the cluster in relation to the vehicle and to the world;

30       Fig. 33 is a schematic of the wheel motor control during balancing and normal locomotion;

Fig. 34 is a schematic of the cluster control arrangement during balancing and normal locomotion;

Fig. 35 is a schematic, relating to Fig. 33, showing the arrangement by which the state variables indicating wheel position are determined so as to  
5 compensate for the effects of cluster rotation;

Figs. 36-38 illustrate the control arrangement for stair-climbing and obstacle traversal achieved by the cluster design of Figs. 11-26 in accordance with a first embodiment permitting climbing;

Fig. 36 is a schematic for the control arrangement for the cluster motors in  
10 the first embodiment permitting climbing, here employing a lean mode;

Fig. 37 is a schematic for the control arrangement for the wheel motors in the first embodiment permitting climbing;

Fig. 38 is a block diagram of the state of the vehicle, utilizing the first embodiment permitting climbing, for moving among idle, lean, and balance  
15 modes;

Figs. 39A-B, 40A-B, 41A-B, and 42A-C illustrate stair-climbing achieved by the cluster design of Figs. 11-26 in accordance a second embodiment permitting climbing;

Figs. 39A and 39B illustrate orientation of the cluster in the sequence of  
20 starting stair climbing in accordance with the second climbing embodiment;

Figs. 40A and 40B illustrate orientation of the cluster in the sequence of resetting the angle origins in this embodiment;

Figs. 41A and 41B illustrate orientation of the cluster in the sequence of transferring weight in this embodiment;

25 Figs. 42A, 42B, and 42C illustrate orientation of the cluster in the sequence of climbing in this embodiment;

Fig. 43 is a schematic for the control arrangement for the wheel and cluster motors during the start sequence of Figs. 39A and 39B;

Fig. 44 is a schematic for the control arrangement for the wheel motors  
30 during the weight transfer sequence of Figs. 41A and 41B; and

Fig. 45 is a schematic for the control arrangement during the climb

sequence of Figs. 42A, 42B, and 42C.

Figs. 46 and 47 show schematically a vehicle in accordance with an embodiment of the present invention equipped with sensors for ascent and descent of stairs and other similar obstacles.

5        Fig. 48 shows a vertical section of an embodiment of the invention in a configuration, similar that of Figs. 9-12, utilizing harmonic drives.

Fig. 49 shows detail of the cluster portion of the vehicle of Fig. 48.

Fig. 50 shows detail of the cluster drive arrangement of the vehicle of Fig. 48.

10       Fig. 51 shows an end view of a cluster of the vehicle of Fig. 48.

Fig. 52 shows the mechanical details of the hip and knee joints of the vehicle of Fig. 48.

Fig. 53 illustrates an embodiment of the invention providing non-visual outputs useful for a subject in control of a vehicle.

15       Detailed Description of Specific Embodiments

The invention may be implemented in a wide range of embodiments. A characteristic of many of these embodiments is the use of a pair of laterally disposed ground-contacting members to suspend the subject over the surface with respect to which the subject is being transported. The ground-contacting

20       members are motor-driven. In many embodiments, the configuration in which the subject is suspended during locomotion lacks inherent stability at least a portion of the time with respect to a vertical in the fore-aft plane but is relatively stable with respect to a vertical in the lateral plane. Fore-aft stability is achieved by providing a control loop, in which the motor is included, for operation of the

25       motor in connection with the ground-contacting members. As described below, the pair of ground-contacting members may, for example, be a pair of wheels or a pair of wheel clusters. In the case of wheel clusters, each cluster may include a plurality of wheels. Each ground-contacting member, however, may instead be a plurality (typically a pair) of axially-adjacent, radially supported and rotatably

30       mounted arcuate elements. In these embodiments, the ground-contacting members are driven by the motorized drive in the control loop in such a way as

to maintain the center of mass of the vehicle above the point of contact of the ground-contacting members with the ground, regardless of disturbances and forces operative on the vehicle.

In Fig. 1 is shown a simplified embodiment of the invention in which the principal ground-contacting members are a pair of wheels and in which supplemental ground-contacting members are used in stair climbing and descending. (As will be shown below, stair climbing and descent and flat-terrain locomotion may both be achieved with a single set of ground-contacting members, when such members are the wheel clusters or the arcuate elements referred to above.)

The embodiment shown in Fig. 1 includes a support arrangement 12, embodied here as a chair, on which a subject 13 may be seated. The vehicle is provided with a pair of wheels 11 disposed laterally with respect to one another. The wheels help to define a series of axes including the vertical axis Z-Z, a lateral axis Y-Y parallel to the axis of the wheels, and a fore-aft axis X-X perpendicular to the wheel axis. The plane defined by the vertical axis Z-Z and the lateral axis Y-Y will sometimes be referred to as the "lateral plane", and the plane defined by the fore-aft axis X-X and the vertical axis Z-Z will sometimes be referred to as the "fore-aft plane". Directions parallel to the axes X-X and Y-Y are called the fore-aft and lateral directions respectively. It can be seen that the vehicle, when relying on the pair of wheels 11 for contacting the ground, is inherently unstable with respect to a vertical in the fore-aft direction, but is relatively stable with respect to a vertical in the lateral direction.

In Fig. 2 it can be seen that in addition to wheels 11, the vehicle is provided with a pair of laterally disposed feet 21 capable of being extended in the vertical direction by controllable amounts, and a footrest 22. The footrests are here provided with sensors for determining the height of objects such as stairs over which they may be disposed. The feet 21 are disposed on a pair of corresponding extendable legs 23. In a preferred embodiment, the vehicle is stable in the fore-aft direction as well as the lateral direction when both feet are in contact with the ground, but lateral stability may be sacrificed when one foot

- 7 -

is in contact with the ground.

In Fig. 3 is shown an arrangement of the embodiment of Figs. 1 and 2 permitting swivel of the chair 12 with respect to the suspension system, including feet 21 and related legs 23. The swivel operates in a plane that is approximately horizontal. The swivel arrangement, in combination with the ability to extend and retract each leg, permits motion of the vehicle up and down stairs in a manner analogous to human locomotion on stairs. Each leg 23, when serving as the weight-bearing leg, permits rotation of the remainder of the vehicle about the leg's vertical axis in the course of a swivel. In achieving the swivel, the chair pivots about a vertical axis disposed centrally between the legs 23 to maintain the chair's forward-facing direction. Additionally, the non-weight-bearing leg 23 is rotated about its vertical axis in the course of a swivel to maintain its related foot 21 in a forward-facing direction.

It can be seen that the embodiment described in Figs. 1-3 sacrifices inherent fore-aft stability in order to achieve relative mobility. For generally gradual surface changes, the balance mode involves providing fore-aft stability to an otherwise inherently unstable system. For more irregular surfaces, such as stairs, this embodiment has a separate "step mode" used for climbing or descending stairs. Stability may be regained in climbing or descending stairs, for example, by using a hand to grab an ordinary handrail 41, as shown in Fig. 4, or even contacting an available wall near the stairs.

In addition, a variety of strategies may be used to reduce the risk of injury arising from a fall. In one arrangement, in the event that a fall is determined to be about to occur, the vehicle may enter a squat mode in which it controllably and quickly lowers the center of mass of the combination of vehicle and human subject. A lowering of the center of mass may be achieved, for example, by hinging or separating the suspension system in such a manner as to cause the height of the chair from the surface to be reduced. A squat mode could also have the beneficial effects of dissipating energy before imparting it to the subject, placing the subject in a position so as to reduce the subject's vulnerability, and putting the subject in a position that is lower so as to reduce the energy

transferred to the person in case of impact.

In the block diagram of Fig. 5 it can be seen that a control system 51 is used to control the motor drives and actuators of the embodiment of Figs. 1-4 to achieve locomotion and balance. These include motor drives 531 and 532 for left and right wheels respectively, actuators 541 and 542 for left and right legs respectively, and swivel motor drive 55. The control system has data inputs including user interface 561, pitch sensor 562 for sensing fore-aft pitch, wheel rotation sensors 563, actuator height sensor 564, swivel sensor 565, and stair dimension sensor 566.

A simplified control algorithm for achieving balance in the embodiment of the invention according to Fig. 1 when the wheels are active for locomotion is shown in the block diagram of Fig. 6. The plant 61 is equivalent to the equations of motion of a system with a ground contacting module driven by a single motor, before the control loop is applied.  $T$  identifies the wheel torque. The character  $\theta$  identifies the fore-aft inclination (the pitch angle of the vehicle with respect to gravity, i.e., the vertical),  $X$  identifies the fore-aft displacement along the surface relative to the reference point, and the dot over a character denotes a variable differentiated with respect to time. The remaining portion of the figure is the control used to achieve balance. The boxes 62 and 63 indicate differentiation. To achieve dynamic control to insure stability of the system, and to keep the system in the neighborhood of a reference point on the surface, the wheel torque  $T$  in this embodiment is set to satisfy the following equation:

$$T = K_1\theta + K_2\dot{\theta} + K_3X + K_4\dot{X}$$

The gains  $K_1$ ,  $K_2$ ,  $K_3$ , and  $K_4$  are dependent upon the physical parameters of the system and other effects such as gravity. The simplified control algorithm of Fig. 6 maintains balance and also proximity to the reference point on the surface in the presence of disturbances such as changes to the system's center of mass with respect to the reference point on the surface due to body motion of the subject or contact with other persons or objects.

In order to accommodate two wheels instead of the one-wheel system illustrated in Fig. 6, the torque desired from the left motor and the torque desired



from the right motor can be calculated separately in the general manner described below in connection with Fig. 33. Additionally, tracking both the left wheel motion and the right wheel motion permits adjustments to be made to prevent unwanted turning of the vehicle and to account for performance

5 variations between the two drive motors.

A manual interface such as a joystick is used to adjust the torques of each motor. The joystick has axes indicated in Fig. 7. In operation of this embodiment, forward motions of the joystick is used to cause forward motion of the vehicle, and reverse motion of the joystick causes backward motion of the vehicle. A left  
10 turn similarly is accomplished by leftward motion of the joystick. For a right turn, the joystick is moved to the right. The configuration used here permits the vehicle to turn in place when the joystick is moved to the left or to the right. With respect to forward and reverse motion an alternative to the joystick is simply leaning forward or backward, since the pitch sensor (measuring  $\theta$ ) would  
15 identify a pitch change that the system would try to compensate for, leading to forward or reverse motion, depending on the direction of lean. Alternatively, control strategies based on fuzzy logic can be implemented.

It can be seen that the approach of adjusting motor torques when in the balance mode permits fore-aft stability to be achieved without the necessity of  
20 additional stabilizing wheels or struts (although such aids to stability may also be provided). In other words, stability is achieved dynamically, by motion of the components of the vehicle (in this case constituting the entire vehicle) relative to the ground.

#### Stair-Climbing with Legs

25 Fig. 8 shows one manner of stair climbing and stair descending with the embodiment of Fig. 1. In confronting a stair, initially both legs are retracted (shown in block 71), and then the height of the first step is measured (block 72). A determination is made whether stair ascent or descent is to occur (73). (At this point, it is helpful, to achieve stability, for the subject to hold an available  
30 handrail.)

Thereafter, in the first stage of stair ascent (shown in block 74), a first leg is

extended until the second leg clears the step (75). The vehicle then swivels until the second leg is over the step it has just cleared (78). (In implementing this stage, it is possible to use a sensor to determine how far to swivel based on the step depth. Alternatively, the swivel can be over a specified angle, such as 90 degrees.) The sensor is then checked to measure the height of the next step (72). If a step is determined to be present (73), and the previous step was odd (76), the process is continued by extending the second leg and retracting the first leg until the first leg clears the next step (79). Next, the vehicle swivels until the first leg is over the cleared step (80). The sensor is then checked to measure the height of the next step (72). If a step is determined to be present (73), and the previous step was even (76), the process is continued by extending the first leg and retracting the second leg until the second leg clears the next step (78). The process is repeated beginning at block 72. If no step is detected, if the previous step was odd, it is completed by slightly extending the second leg, fully retracting the first leg, swiveling until both legs face forward, and then retracting the second leg to stand on both feet. If no step is detected, if the previous step was even, it is completed by slightly extending the first leg, fully retracting the second leg, swiveling until both legs face forward, and then retracting the first leg to stand on both feet (88).

20       An analogous procedure is followed for descending stairs. In the first stage of stair descent (shown in block 81), the first leg is slightly extended to clear the second leg (block 82). Thereafter, the vehicle swivels until the second leg is over the step onto which it is going to descend (84), the first leg is retracted and the second leg is extended until the second leg is on the step (85). The sensor is then checked to measure the height of the next step (72). If a step is determined to be present (73), and the previous step was odd, the process is continued by swiveling until the first leg is over the step onto which it is going to extend (86). The second leg is then retracted and the first leg extended until the first leg is on the step (block 87). The sensor is then checked to measure the height of the next step (72). If a step is determined to be present (73), and the previous step was even, the process is continued (84), and then repeated beginning at block 72. If no

step is detected, descent is completed by swiveling until both legs face forward, and then retracting both legs to stand on both feet (88).

In lieu of the swivel arrangement discussed above, in a further embodiment, relative motion of the legs may be achieved by causing each leg to  
5 be mounted in a manner as to permit it to slide in an approximately horizontal plane in the fore and aft directions. Alternatively, the legs may utilize joints analogous to knee and hip joints of human subjects.

#### Stair-Climbing with Clusters

Whereas the embodiment of Fig. 1 requires different ground-contacting  
10 members for stair-climbing and for level terrain navigation, the embodiments of the invention shown in Figs. 9-21 successfully utilize the same set of ground-contacting members for both stair-climbing and for level terrain navigation. Figs. 9-18 illustrate embodiments of the invention utilizing a pair of wheel clusters as the ground-contacting members in lieu of the pair of wheels used in the  
15 embodiment of Fig. 1.

In Fig. 9, there is shown a side view of an embodiment utilizing a two-wheel cluster design. The subject 962 is shown supported on the seat 95 of this embodiment. In view is the right-hand cluster 91 with a pair of wheels 931 and 932 in radially symmetric locations about the cluster's axis 92 of rotation. A  
20 similar left-hand cluster is also employed. Each cluster has its own separately controlled motor to drive it about its axis of rotation 92. Each pair of wheels (here, 931 and 932) is also driven by a separately controlled motor about its own axis of rotation, but the wheels of a cluster are coupled to rotate synchronously.

It can be seen in Fig. 9 that the cluster 91 is positioned so that both wheels  
25 931 and 932 may be in contact with the ground. When the cluster 91 (along with the left-hand cluster) is in this position, the vehicle of this embodiment is relatively stable in the fore-aft plane, thereby permitting a subject 961 shown standing) to assume rapidly a comfortable seated position 962 on the vehicle or, for example, a handicapped person to transfer from another chair.

30 The cluster 91, however, may be rotated about its axis 92 until only wheel 932 of each cluster is in contact with the ground as shown in Fig. 10. When the

cluster 91 (along with the left-hand cluster) is in this position, the vehicle has the same inherent fore-aft instability as discussed above in connection with the embodiment of Fig. 1. The same equations governing the system may be used as discussed above in order to drive the wheels to create fore-aft stability

- 5 dynamically. Also as shown in Figs. 9 and 10, the chair 95 may be linked to the ground-contacting members via an articulated arm having segments 941 and 942 that may be adjusted in angle with respect to each other and the seat 95. The adjustments are achieved by motorized drives disposed at hubs 945 and 946. (Such drives may, for example, be harmonic drives.) As a result of these
- 10 adjustments (in addition to the effect of rotating the clusters), the height of the seat 95, among other things, may be changed; it can be seen that the subject 101 may achieve a height while seated on the vehicle comparable to (or even greater than) a standing subject 961. This is desirable, since seated subjects, in wheel chairs, for example, are commonly dwarfed by standing subjects. As will be
- 15 discussed in further detail below, the foregoing adjustments also permit adjustment of the fore-aft tilt of the seat.

Figs. 11-18 show use of a three-wheel cluster design in various modes and configurations. Figs. 11 (showing stable rest position) and 12 (showing balancing position for travel) for three-wheel clusters correspond to Figs. 9 and 10 for two-

20 wheel clusters. Each three-wheel cluster (right-hand cluster 111 is shown here) is rotatably mounted and motor-driven about axis 112, using separately controllable motors. As in the case of the two-wheel cluster design, the wheels of each cluster are separately driven and controlled, but run synchronously in each cluster.

- 25 It should be noted that although many of the embodiments described herein utilize separate motors individually controlled, a common motor may be used for a number of functions, and the separate control may be achieved by appropriate clutch or other power transmission arrangement, such as a differential drive. The term "motorized drive" as used in this description and the
- 30 following claims means any vehicle that produces mechanical power regardless of means, and therefore includes a motor that is electric, hydraulic, pneumatic, or

thermodynamic (the latter including an internal combustion or an external combustion engine) together with any appropriate arrangement for transmission of such mechanical power; or a thrust-producing device such as a turbojet engine or a motor-driven propeller.

5           Fig. 13 is similar to Fig. 12, but here the chair 95 is shown having a back 131 and a seat 132. The angle of back 131 relative to the seat 132 and the angle of the seat 132 relative to the horizontal may be adjusted so that with the back 131 in a generally vertical orientation, the seat 132 may be tilted toward the vertical to permit the user to assume a more nearly standing position.

10           In Fig. 14, the embodiment is shown climbing stairs. The articulated arm segments 941 and 942 are here in the extended position to provide maximum height, so that the feet of the subject 101 to clear the stairs 141. Stair climbing is achieved by rotation of each of the right cluster 111 and left cluster (not shown) about central axis 112 and coordinated rotation of the wheels. The actual modes  
15 and control arrangements for achieving stair climbing are described below in connection with Fig. 27 et seq.

          Figs. 15-17 are views of an embodiment similar to that of Figs. 11 and 12, but in which one of the segments 161 and 171 of the articulated arm, in this case segment 171, actually carries seat 151 of the body support combination  
20 comprising seat 151 and surround 152. Surround 152 is here provided with headrest 155. When the segment 171 is oriented in a near-vertical position, the seat 151 moves out of the way, permitting the subject 153 to assume a standing position supported by seat 151, surround 152, and footrest 154.

          Figs. 18-20 illustrate an embodiment, similar to that of Figs. 11-14, in  
25 which the height of subject 101 can be adjusted by telescoping member 181, the extension of which is under separate motor control. In addition, the roll angle of the subject, about an axis R-R in Fig. 19, is adjustable as shown in Fig. 18, via separately controlled motor unit 191 of Fig. 19. Furthermore, the fore-aft tilt of chair 181, shown in two different positions in Figs. 19 and 20, is adjustable via  
30 separately controlled motor unit 192. Although the roll and tilt adjustments are here implemented with a pivot and a motorized drive, each of these adjustments

could also be implemented, for example, by a four-bar or other linkage arrangement coupled to a motorized drive.

In Fig. 21, it can be seen that a vehicle can be made in accordance with the present invention without providing a chair. The subject stands on a platform 5 211 and holds a grip 212 on handle 213 attached to the platform 211, so that the vehicle of this embodiment may be operated in a manner analogous to a scooter. The grip 212 may be conveniently provided with a thumb-operated joystick for directional control, although other methods of control may also be used. For example, the handle 213 and grip 212 may be avoided altogether, and the 10 platform 211 may be equipped with sensors to detect leaning of the subject. Indeed, as described in connection with Fig. 5 and as further described below, the pitch of the vehicle is sensed and compensated for in the control loop, so that if the subject leans forward, the vehicle will move forward to maintain vertical stability. Accordingly, a forward lean will cause forward movement; a backward 15 lean will cause backward movement. Appropriate force transducers may be provided to sense leftward and rightward leaning and related controls provided to cause left and right turning as a result of the sensed leaning. The leaning may also be detected using proximity sensors. Similarly, the vehicle of this embodiment may be equipped with a foot- (or force-) actuated switch to activate 20 the vehicle, in such a manner that the switch is closed so as to power the vehicle automatically when the subject stands on the platform 211. Although this embodiment is shown with left and right wheel clusters 214 operated in the manner of the clusters of Figs. 13-20, the vehicle may be alternatively provided with other ground-contacting members, such as with a transversely disposed 25 single pair of wheels in the manner of Fig. 1 (but without legs) or with left and right pairs of axially adjacent and rotatably mounted arcuate element pairs in a fashion similar to that of Figs. 22-24 described below.

#### Stair-Climbing Using Arcuate Elements

Figs. 22-24 illustrate an embodiment wherein each ground-contacting 30 member is realized as a plurality (here a pair) of axially adjacent, rotatably mounted arcuate element groups. For example, in Fig. 22, which corresponds

generally to the cluster-propelled embodiment of Fig. 15, the right-hand ground-contacting member is realized as arcuate pair 221 and 222. The arcuate elements (items 221a-221b and items 222a-222b) of each pair 221 and 222 are transversely disposed at opposing ends of a support strut (items 221c and 222c respectively)

5 that is rotatably mounted at its midpoint. Each support strut 221c and 222c is motor driven and is controllable independently of the other. In operation, during normal locomotion, the arcuate elements of each pair approximate action of a wheel. When, for example, during such locomotion, arcuate element 221a is about to lose contact with the ground, element 222a has been rotated so as to

10 arrive at the position shown to permit the roll established by the shape of the arcuate elements to continue. In this fashion, there is a substantially continuous rolling motion of the vehicle along the arcuate elements. Thus the motion of each of the arcuate elements about its axis of rotation is not generally at constant angular velocity. Typically each arcuate element pair moves at a greater angular

- 16 -

$$\frac{\dot{\omega}_R}{\dot{\omega}_L} = -\frac{I_L}{I_R}.$$

The gear ratios  $N_g$  may be substituted for the ratio of the angular accelerations, as follows:

$$N_g = -\frac{I_L}{I_R}.$$

By satisfying this equation for  $N_g$ , which can be accomplished by suitable configuration of the gear ratio and the inertias, the reactive torques will be in  
5 balance and the vehicle will proceed smoothly.

Preferably the radially outermost extent of each arcuate element has a



some embodiments to cause the tip radius of curvature to be greater than the main radius of curvature. In other embodiments, the tip may be deflectably mounted and is coupled to a deflection arrangement, so that on actuation the local radius of curvature may be modified.

- 5           It should be noted that, when desired, the vehicle of this embodiment may be placed in a rest position, by scissoring struts 221c and 222c to such an angle (approaching  $\pi$  radians) that the leading portion of one arcuate element is in contact with the ground, the trailing portion of another arcuate element is in contact with the ground, and the points of contact are spaced apart from one  
10 another. Such a position also reduces the overall height of the vehicle and facilitates compact storage or transport of the vehicle.

In Fig. 23, which corresponds generally to the cluster-propelled embodiment of Fig. 17, the vehicle of Fig. 22 is shown with the subject standing on platform 154 with the seat 151 oriented vertically.

described herein. The vehicle is powered by battery stack 271. Bus 279 provides communications (here implemented serially) among and power to the various assemblies. Overall system control of the vehicle is provided by central micro controller board 272. Inputs, derived from sources such as the joystick and  
5 inclinometer, to the central micro controller board 272 that establish the basis for system control are provided by the driver interface assembly 273, which is described below in connection with Fig. 29. The tilt, height, and roll of the chair 182 of Fig. 18 are adjusted by tilt motor control assembly 274, height motor control assembly 275, and roll motor control assembly 276 respectively. Rotation  
10 of the right and left clusters is controlled by right cluster control assembly 278a and left cluster control assembly 278b respectively. Rotation of the wheels in the right cluster and in the left cluster is controlled by right wheel control assembly 277a and left wheel control assembly 277b.

The general structure of each of the control assemblies, identified in Fig. 27, used for the chair position and wheels and clusters is shown in Fig. 28. A  
15 motor 281 receives 3-phase power from power converter 282. Output from Hall effect detector 2812 provides information signals to the power converter 282 to control the phase of power to the motor. Information signals relating to the shaft rotation of the motor or of the position of mechanical systems powered by the  
20 motor may be provided by one or more of potentiometer 284, tachometer 2811, or incremental encoder 2813. (Alternatively, the Hall effect detector 2812 may itself be utilized.) These signals are fed to peripheral micro controller board 283. Additionally temperature outputs associated with power converter 282 and motor 281 provide input signals to the peripheral micro controller board 283. The  
25 peripheral micro controller board 283 is in turn in communication with the central micro controller board 272 over bus 279.

Fig. 29 is a block diagram providing detail of the driver interface assembly 273 of Fig. 27. A peripheral microcomputer board 291 receives an input from joystick 292 as well as from inclinometer 293. The inclinometer provides  
30 information signals as to pitch and pitch rate. (The term "inclinometer" as used in this context throughout this description and in the accompanying claims

means any device providing an output indicative of pitch or pitch rate, regardless of the arrangement used to achieve the output; if only one of the pitch and pitch rate variables is provided as an output, the other variable can be obtained by suitable differentiation or integration with respect to time.) To

5 permit controlled banking into turns by the vehicle (thereby to increase stability while turning) it is also feasible to utilize a second inclinometer to provide information as to roll and roll rate or, alternatively, the resultant of system weight and centrifugal force. Other inputs 294 may also be desirably provided as an input to the peripheral micro controller board 291. Such other inputs may

10 include signals gated by switches (knobs and buttons) for chair adjustment and for determining the mode of operation (such as lean mode or balance mode described below). The peripheral micro controller board 291 also has inputs for receiving signals from the battery stack 271 as to battery voltage, battery current, and battery temperature. The peripheral micro controller board 291 is in

15 communication over bus 279 with the central micro controller board 272.

Fig. 30 is a logical flow diagram followed by the central micro controller board 272 of Fig. 27 in the course of one control cycle. For diagnostic purposes, the cycle begins at step 301, checking for the presence of any input from the technician. The next step, 302, is to read the driver's inputs from the joystick,

20 switches, knobs, and buttons. Next, in step 303, the state variables of the vehicle are read as inputs. Next, in step 3011, the technician's display is updated (in case of diagnostic use), and then, in step 304, the program state is modified based upon the input variables obtained in steps 301 through 303. A test is then made whether to exit the program (step 3041), and if the determination is yes, all of the

25 motor amplifiers are disabled (step 3042), and the program is ended. Otherwise, a safety check is made (in step 3043) of pertinent variables (such as temperature, battery voltage, etc., and if the result is negative, the wheel and cluster motor amplifiers are disabled (step 3044), and the program state is then modified (step 3055). However, several levels of checking are suitably employed so that the

30 motor amplifiers are disabled only after threshold alarm conditioners have been established. If the safety check in step 3043 is positive or after the program state

- 20 -

is modified in step 3055, calculations are performed serially for the cluster torque signal (step 305), wheel torque signal (step 306), tilt velocity signal (step 307), roll velocity signal (step 308), and height velocity signal (309). The results of these calculations are then provided as an output to their respective vehicles in  
5 step 3010. Under step 3091, the program waits for the next timing signal to begin the control cycle again. The frequency of the control cycles in this embodiment is in the range of 200-400 Hz., which provides satisfactory control responsiveness and stability.

Fig. 31 illustrates variables defining the dimensions of the cluster design  
10 of Figs. 11-26 and of a hypothetical stair with respect to which the cluster design can be used for ascent or descent. Set forth in the following table are variables used to identify these dimensions shown in Fig. 31. "Nominal size" means typical dimensions of these items, in connection with which the embodiment of Figs. 18-20 has been implemented and functions.

Table 1. Dimension Variables

Variable	Description	Nominal Size
L	Distance from cluster center to center of mass of system	21.0"
l	Distance from cluster center to wheel center	5.581"
l'	Distance from wheel center to wheel center	9.667"
d	Depth of stair	10.9"
h	Height of stair	6.85"
z	Distance between the edge of the riser and the wheel contact point when four wheels are in contact with the stairs and the lower wheels are against the riser. This can be calculated using $z = (l'^2 - h^2)^{1/2} - r$ .	3.011"
r	Radius of the wheel	3.81"

The following conventions have been employed in using these variables and those in Table 2 below in connection with the description below:

1. Variables defined in world coordinates are named using a single subscript in capital letters. World coordinates are coordinates fixed to the earth (inertial).
2. Variables defined in relative coordinates are named with a dual subscript. The subscripts indicate the endpoints of the variable. The order of the

subscripts indicates the sign of the variable. For example,  $\theta_{pc}$  is the angle between the post and the cluster leg where clockwise rotation from the cluster post is positive (see note 4). A cluster's "leg" is the line segment from the center of the cluster to the center of the wheel that is currently being balanced on. A  
5 cluster's "post" is the line segment from the system's center of mass to the center of the cluster.

3. Lower case subscripts are used to indicate other attributes, e.g., right/left, etc.: r = right; l = left; ref = reference; f = finish; s = start.

4. All angles are positive in the clockwise direction, where positive travel  
10 is in the positive x direction.

5. A dot over a variable indicates differentiation in time, e.g.,  $\dot{\theta}$ .

Fig. 32 illustrates angle and motion variables pertinent to defining orientation of the cluster in relation to the vehicle and to the world. These

variables are defined as set forth in the following table.

Table 2. Angle and Motion Variables.

Variable	Name	Description
5 $\theta_c$	Theta Cluster	The angle between vertical and the line from the wheel that is currently being balanced on to the cluster hub.
$\theta_w$	Theta Wheel	The angle between vertical and an arbitrary radial line on the wheel.
$\theta_{pc}$	Theta Post-Cluster	The angle centered at the cluster hub that starts at the post and ends at the leg being balanced on. ( $\theta_{pc} = 180^\circ$ when balanced on one wheel with the leg vertical.)
$\theta_{pw}$	Theta Post-Wheel	The angle between the post and the arbitrary line on the wheel.
$x$	$x$	The linear position of the wheel center along the floor in reference coordinates.
10 $\theta_i$	Theta Inclinator	The angle of the inclinometer with respect to gravity.
$\theta$	Theta (Pitch Angle)	The actual angle between center of mass of the vehicle and the wheel center. This is derived by compensating inclinometer angle $\theta_i$ for $\theta_c$ and $\theta_{pc}$ .
$\psi$	Yaw Angle	The angle between the X axis of the vehicle and the x-axis of the reference frame.

Figs. 33-35 are block diagrams showing control algorithms, suitable for

use in conjunction with the control assemblies of Fig. 27, to provide stability for a vehicle according to the embodiment of Figs. 11-21 when balanced on a pair of wheels, both during locomotion and in a fixed position.

Fig. 33 shows the control arrangement for the motors of the right and left wheels (corresponding to items 252a and 252b of Fig. 25). The arrangement has inputs of  $\theta$ ,  $\dot{\theta}$ ,  $r\dot{\theta}_l$  (linear velocity of the left wheel relative to the world coordinate system) and  $r\dot{\theta}_r$  (linear velocity of the right wheel), in addition to directional inputs 3300 determined by joystick position along X and Y axes of a reference coordinate system. Inputs  $\theta$ ,  $\dot{\theta}$ , and error signals  $x$  and  $\dot{x}$  (described below), subject to gains K1, K2, K3, and K4 respectively, become inputs to summer 3319, which produces the basic balancing torque command for the wheels, in the general manner described above in connection with Fig. 6 above. The output of summer 3319 is combined with the output of yaw PID loop 3316 (described below) in summer 3320, then divided in divider 3322 and limited in saturation limiter 3324, to produce the left wheel torque command. Similarly, the output of summer 3319 is combined with the output of PID loop 3316 in summer 3321, then divided in divider 3323 and limited in saturation limiter 3325, to produce the right wheel torque command.

In Fig. 33, a directional input along the X axis moves the reference coordinate system along its X axis relative to the world coordinate system (which represents the traveled surface), at a velocity proportional to the displacement of the joystick. A directional input along the Y axis rotates the reference coordinate system about its Z axis at an angular velocity proportional to the displacement of the joystick. It will be appreciated that motion of the joystick in the positive X direction is here interpreted to mean forward motion; motion of the joystick in the negative X direction means reverse motion. Similarly, motion of the joystick in the positive Y direction means leftward turning, counter-clockwise as viewed from above; motion of the joystick in the negative Y direction means rightward turning clockwise as viewed from above. Hence the directional inputs Y and X are given deadband via deadband blocks 3301 and 3302 respectively, to widen



the neutral position of the joystick, then subject to gains K11 and K10, then rate-limited by limiters 3303 and 3304 respectively, which limit the angular and linear accelerations respectively of the reference coordinate system. The sum of these outputs achieved through summer 3305 becomes the reference velocity  $\dot{x}_{ref}$  whereas the difference of these outputs achieved through summer 3306 becomes the reference velocity  $\dot{y}_{ref}$ . These reference velocities are subtracted in summers 3308 and 3307 from compensated linear velocity input signals  $r\dot{\theta}_{wl}$  and  $r\dot{\theta}_{wr}$  for left and right wheels (see description below in connection with Fig. 35 for these quantities) to obtain velocity error signals  $\dot{x}_l$  and  $\dot{x}_r$  for left and right wheels within the reference coordinate system. In turn the average of these signals, determined via summer 3317 and divider 3318, produces a linear velocity error signal  $\dot{x}$ . Displacement error signal  $x$  is derived by integrating  $r\dot{\theta}_{wl}$  and  $r\dot{\theta}_{wr}$  in integrators 3310 and 3309, limiting the results in saturation limiters 3312 and 3311, and then averaging their outputs via summer 3313 and divider 3315. The difference between these displacements, determined via summer 3314, produces the yaw error signal  $\psi$ .

The yaw error signal  $\psi$  is run through a standard proportional-plus-integral-plus-derivative (PID) control loop 3316, the output of which is combined with the output of the basic balancing torque command of summer 3319, to produce the individual wheel torque commands, which cause the wheels to maintain fore-aft stability and also cause the vehicle to align itself with the axes of, and follow the origin of, the reference coordinate system as directed by directional input 3300.

Fig. 34 is a schematic of the cluster control arrangement. The orientation of the clusters can be controlled by directional inputs 3400. If desired, the same joystick as used to provide directional inputs 3300 to the wheels may be switched, by a separate switch, to be operative, in a separate mode, to provide the directional inputs 3400 specifying the orientation of the clusters. In a fashion generally analogous to the signal path through summers 3306 and 3305 of Fig. 33, here the joystick signals resulting from positive displacement in the X

direction are added, and signals resulting from positive displacement in the Y direction are subtracted from one another, in summers 3402 and 3401 to provide left and right cluster rotation rate signals, which, after integration in integrators 3404 and 3403 respectively, provide desired cluster angle orientation information

5 to left and right cluster summers 3406 and 3405 respectively.

Absent directional inputs 3400, the preferred cluster orientation, normally  $\theta_{PC\text{ref}} = \pi$  radians, is provided over line 3413 of Fig. 34 to each of the summers 3406 and 3405, along with signals showing actual cluster orientation  $\theta_{PCl}$  and  $\theta_{PCr}$  (derived by passing cluster angle rate signals from left and right cluster encoders  
10 through integrators 3412 and 3411 respectively). The outputs of the summers 3406 and 3405 are therefore cluster position error signals for the left and right clusters respectively. These signals are fed through PID control loops 3408 and 3407 and saturation limiters 3410 and 3409 to drive the left and right cluster motors.

15 Fig. 35 is a schematic, relating to Fig. 33, showing the arrangement by which the state variables indicating wheel position, pitch, and pitch rate are determined so as to compensate for the effects of cluster rotation. As mentioned in Table 2, the pitch angle  $\theta$  is the actual angle between the center of mass of the vehicle and the center of the wheel that is currently being balanced on. The angle  
20  $\theta_i$  measured by the inclinometer is the angle of the post with respect to the vertical. Hence the actual pitch angle  $\theta$  is based on  $\theta_i$  from which a correction signal  $\theta_{icorr}$  is subtracted by summer 3518. The signal  $\theta_{icorr}$  is calculated in summer 3516 as  $\theta_{PC} + \pi - \theta_c$ . The signal  $\theta_{PC}$  is determined as the average of the left and right post-to-cluster angles  $\theta_{PCl}$  and  $\theta_{PCr}$  obtained from integration in  
25 integrators 3509 and 3510 of left and right cluster encoder outputs; the average is obtained by using summer 3511 and divider 3512. Assuming that the vehicle is balanced,  $\theta_c$  can be derived from  $\theta_{PC}$  using the formula

$$\theta_c = \tan^{-1} \left( \frac{L \sin \theta_{PC}}{1 - L \cos \theta_{PC}} \right)$$

This calculation is achieved in section 3515. The  $\theta_{icorr}$  is differentiated by

differentiator 3517 to provide a correction to pitch rate signal  $\dot{\theta}_l$ , which is supplied by summer 3519, yielding the corrected output  $\dot{\theta}$ .

Similarly, the linear left and right velocities  $r\dot{\theta}_{wl}$  and  $r\dot{\theta}_{wr}$  for left and right wheels are derived from differentiation by differentiators 3507 and 3508 of the  
 5 derived linear left and right position signals  $r\dot{\theta}_{wl}$  and  $r\dot{\theta}_{wr}$ . The position signals, in turn, are derived by multiplying by a gain of  $r$  in multipliers 3505 and 3504 the determined absolute angular positions  $\theta_{wl}$  and  $\theta_{wr}$  of the left and right wheels. The angular positions  $\theta_{wl}$  and  $\theta_{wr}$  are determined by first integrating the left and right wheel encoder signals  $\dot{\theta}_{Pwl}$  and  $\dot{\theta}_{Pwr}$  in integrators 3501 and 3502 to  
 10 obtain  $\theta_{Pwl}$  and  $\theta_{Pwr}$ . These signals are then fed into summers 3503 and 3504 where they are compensated for the effects of cluster rotation by the addition of  $\theta_c$  and the quantity  $\frac{1}{2}(\theta_{pc} - \pi)$  derived from summer 3513 and divider 3514.

Figs. 36 and 37 are block diagrams showing control algorithms, suitable for use in conjunction with the control assemblies of Fig. 27, to permit a vehicle  
 15 according to the embodiment of Figs. 11-21 to achieve stair-climbing and obstacle traversal in accordance with a first embodiment permitting climbing. In this embodiment the clusters are put in a *lean* mode, in which they are rotated to attempt to maintain balance in the same general manner as used in normally balancing by wheel rotation as shown in Fig. 33. The same basic equations are  
 20 used. In Fig. 36, summer 3601 provides correction signals to drive the left and right clusters, derived, among other things, from inclinometer 3602, which provides pitch and pitch rate signals  $\theta$  and  $\dot{\theta}$  via gains K1 and K2 respectively.

The encoder outputs from left and right clusters provide inputs of  $\dot{\theta}_{Pcl}$  and  $\dot{\theta}_{Pcr}$ , which are integrated by integrators 3603 and 3604 respectively and saturation  
 25 limited by limiters 3605 and 3606 respectively to produce  $\theta_{Pcl}$  and  $\theta_{Pcr}$ . These values, when averaged via summer 3608 and divider 3610, result in angular displacement  $\theta_{pc}$ , which is provided through gain K3 as an additional input to

summer 3601. The velocity  $\dot{\theta}_{PC}$ , determined as the average of  $\dot{\theta}_{PCl}$  and  $\dot{\theta}_{PCr}$ , via summer 3617 and divider 3618, is a further input to summer 3601, this time via gain K4. The output of summer 3601 provides uniform drive of the left and right cluster motors via summers 3611 and 3612, dividers 3613 and 3614, and  
 5 saturation limits 3615 and 3616 respectively. In addition, however, the twist signal, via PID control loop 3609, provides a differential drive through summers 3611 and 3612 to the left and right cluster motors. The twist signal is derived by using summer 3607 to subtract the signals  $\theta_{PCl}$  and  $\theta_{PCr}$  from one another.

When the clusters are in the lean mode, the wheels are in a slave mode, in  
 10 which the wheels are driven as a function of the rotation of the clusters. This is shown in Fig. 37, where  $\theta_{PC}$ , derived from Fig. 36, as output from divider 3610, is multiplied by a climb ratio constant in gain 3701 to produce  $\theta_{PWref}$ , a signal that is fed to summers 3703 and 3702 to control the left and right wheel motors via PID control loops 3705 and 3704 and saturation limits 3707 and 3706 respectively. A  
 15 comparison of Figs. 37 and 34 show that the wheels are slaved to the clusters in Fig. 37 in the same manner that the clusters are slaved to the vertical ( $\pi$  radians) input 3413 in Fig. 34. In Fig. 37, the summers 3703 and 3702 have two other inputs each. One input is to track the results of directional inputs 3714 from the joystick, which, in a manner analogous to the processing in Fig. 34, via summers  
 20 3709 and 3708 and integrators 3711 and 3710, produces left and right control signals provided as inputs summers 3703 and 3702 respectively. Another input is to track the effects of wheel rotation, so  $\theta_{PWl}$  and  $\theta_{PWl'}$ , obtained by running the left and right wheel encoder outputs through integrators 3713 and 3712 are also subtracted by summers 3703 and 3702.

25 The use of the lean mode provides a powerful and stable method to achieve climbing over obstacles. The climb ratio is determined by the multiplier selected for gain 3701 of Fig. 37. Once this is determined (an item that can be selected manually or automatically determined following obstacle measurement using appropriate spatial sensors or determined in whole or in part empirically  
 30 based on the state variables themselves) the vehicle can surmount obstacles by the subject's leaning or causing the vehicle to lean in the desired direction. The

clusters rotate to maintain balance at the same time that they, with the wheels, are rotating over the obstacles. When the vehicle does not encounter obstacles, it may desirably be operated in the balance mode of Figs. 33 and 34, with the clusters slaved to  $\pi$  radians and the wheels maintaining balance and causing  
5 desired locomotion.

The transitions between wheel balancing mode and cluster lean mode are a matter requiring attention. Fig. 38 is a block diagram of the state of the vehicle, utilizing the embodiment of Figs. 33-37, among idle, lean, and balance modes. At key times, there will be no state change until it is determined that  $(\theta_{PC} - \pi) \bmod$   
10  $(2\pi/3) = 0$ . This is a point at which the center of mass is approximately above the ground contacting pair, and such a condition is referred to as a "zero crossing" below in this description and in the following claims. At the zero crossing, the cluster is in a position so that, for example, it can be slaved to the  $\theta_{PC} = \pi$  position in the manner of Fig. 34. After beginning at block 3801, the vehicle's initial state  
15 is To Idle 3802, from which it enters and remains in Idle 3803, until the Run/Idle switch is moved into the Run position. Once in that position, the vehicle enters the From Idle state 3804. Because there is no absolute reference on either of the clusters, we assume that the vehicle is on flat, level ground at state "From Idle" 3804, where an absolute reference is established. All movement of the clusters  
20 determined by the incremental encoders is relative to this reference. At this point, or at any later point, if the Run/Idle switch is moved back to the Idle position, the state returns over path 3812 to the To Idle state 3802. Otherwise, the state becomes Wait 3805, and remains there, until it is determined that  $\theta = 0$ , whereupon the state becomes To Lean 3806. To Lean then moves to Lean 3807,  
25 and remains there, unless a switch is moved. If the Lean/Balance switch is then placed in the Balance position and if the clusters experience a zero crossing, then the state moves successively to From Lean 3808, to To Balance 3809, and finally to Balance 3810. If the Lean/Balance switch is moved to the Lean position, the state moves to From Balance 3811 and back to To Lean 3806.

30 The Wait state allows a smooth startup of the wheel and cluster motors. Without it, the control loop would immediately attempt to compensate for a

potentially large error signal from the inclinometer. By starting at a zero crossing, this is avoided. An additional technique of monitoring  $\dot{\theta}$  and requiring it to be below a certain threshold at a zero crossing provides an even softer start.

Figs. 39A-B, 40A-B, 41A-B, and 42A-C illustrate the sequences in a control arrangement, to permit a vehicle according to the embodiment of Figs. 11-21 to achieve stair climbing in accordance a second embodiment. Four basic sequences of operation are involved in this embodiment: *start*; *reset angle origins*; *transfer weight*; and *climb*. This embodiment, among others, may be conveniently implemented in the control arrangement of Fig. 27. Block diagrams showing control algorithms for achieving these four sequences are shown in Figs. 43 (start), 44 (transfer weight), and 45 (climb). (No motion is involved in the *reset angle origins* sequence, so no control algorithm is shown for this sequence.) Figs. 39A and 39B illustrate orientation of the cluster in the *start* sequence. In this sequence, the cluster moves from its normal balancing position on two wheels (Fig. 39A) to a position (shown in Fig. 39B) in which a first pair of wheels (one from each cluster) is on a first level and a second pair of wheels from each cluster is on the next stair. The angle values used in this description in connection with Figs. 39A through 42C are those resulting from application of the nominal stair and cluster wheel sizes given in Table 1 above. In the *start* sequence, algorithm shown in Fig. 43, an input is provided of  $\theta_{C\text{ref}}$  as a function of time to the cluster block 4301; the function varies smoothly from the start to the finishing values. Alternatively, an input of  $\theta_{PC\text{ref}}$  can be provided in a similar fashion. Here the input of  $\theta_{C\text{ref}}$  is run through processor 4302 to compute the

quantity  $\sin^{-1}\left(\frac{L\sin\theta_C}{L}\right)$ . This quantity, along with  $\theta_{C\text{ref}}$  itself and  $\pi$  are

provided as inputs to summer 4303, which computes

$$\theta_{PC\text{ref}} = \pi - \theta_{C\text{ref}} - \sin^{-1}\left(\frac{L\sin\theta_{C\text{ref}}}{L}\right),$$

and provides this quantity as the  $\theta_{PC\ ref}$  input to cluster block 4301. The cluster block 4301 is configured as in Fig. 34, except that  $\theta_{PC\ ref}$  is no longer fixed at  $\pi$ , but varies as just described. The balancing block 4304 is configured as in Fig. 33, but

5 the joystick gains K10 and K11 are set to 0. The summer 4305 provides compensation to the pitch reading of the inclinometer in the same manner as described above in connection with Fig. 35, and the output of summer 4305 is differentiated by differentiator 4306 to provide correction of  $\dot{\theta}_1$  in the manner described above in connection with Fig. 35, so corrected pitch inputs  $\theta$  and  $\dot{\theta}$  are

10 provided to the wheel balancing algorithm 4304. The inputs  $r\dot{\theta}_{wl}$  and  $r\dot{\theta}_{wr}$  to balancing block are also derived in the same manner as described above in connection with Fig. 35.

Figs. 40A and 40B illustrate orientation of the cluster in the *reset angle origins* sequence. In this step, the system changes the identity of the "leg"

15 (referred to in item 2 of the conventions discussed after Table 1), for the purpose measuring state variables, from that associated with the lower wheel to that associated with the wheel on the next stair. As a result, since there are three wheels in the cluster, and the total angular distance around the cluster's center is  $2\pi$  radians, this step adds  $2\pi/3$  radians to  $\theta_{PC}$  and subtracts  $2\pi/3$  radians from

20  $\theta_C$ . There is no motion associated with this step.

Figs. 41A and 41B illustrate orientation of the cluster in the *transfer weight* sequence. In this sequence, the weight of the vehicle and of the subject is transferred from the wheel on the lower stair to the wheel on the upper stair. It is here implemented as a pre-programmed operation based on the known

25 geometry of the stairs and the cluster. The value of  $\theta_C$  does not change during this sequence. The value of  $\theta_{PC}$  must change to reflect the new location of the vehicle's center of mass. To achieve this result, an input of  $\theta_{PC\ ref}$  as a function of time is provided on line 3413 to the cluster block shown in Fig. 34 and to the wheel block of Fig. 44. Because this sequence is programmed, the climb block of

30 Fig. 45 and the wheel balance block of Fig. 33 are not active. In Fig. 44, the  $\theta_{PC\ ref}$

input is run through divider 441 and then provided to summers 443 and 442 that provide control signals, via PID control loops 445 and 444 and saturation limits 447 and 446, to the left and right motor wheels respectively. The summers 443 and 442 also subtract the values of  $\theta_{PWl}$  and  $\theta_{PWr}$  derived by running the angular velocity information from left and right wheel encoders through integrators 448 and 449 respectively.

Figs. 42A, 42B, and 42C illustrate orientation of the cluster in the *climb* sequence. In this sequence, the wheel of the vehicle is rotated in a forward direction toward the next stair riser while simultaneously rotating the cluster to position the next balancing wheel on the next stair tread. The cluster rotation  $\theta_c$  is proportional to the distance traveled by the wheel on the stair tread. In this sequence, there is no reference position input. The subject leans or pulls on the hand rail in order to cause the vehicle to move forward. The cluster rotates automatically as a result of the feedback from  $\theta_w$  to  $\theta_c$  over path 451 in Fig. 45.

At the beginning of the *climb* sequence,  $x$  is set to 0. The control algorithm in this sequence needs to monitor either  $\theta_c$  or  $\theta_{pc}$  and move to the *transfer weight* sequence when this angle reaches its final value. On the last stair, instead of stopping at the finishing angles shown in Fig. 42C, the process must be stopped at  $\theta_c = 0$  or  $\theta_{pc} = \pi$ . Then the vehicle should return to normal balancing mode.

The balancing block 453 and the cluster block 452 are as described above in connection with Figs. 33 and 34 respectively. The derivation of inputs  $\theta$ ,  $\dot{\theta}$ ,  $r\dot{\theta}_{wl}$  and  $r\dot{\theta}_{wr}$  to the balancing block 453 is as described above in connection with Figs. 43 and 35. Indeed, the configuration of Fig. 45 is substantially similar to that of Fig. 43, with the singular difference that  $\theta_{c\text{ref}}$  is no longer independently varied, but instead is made a function of  $\theta_w$ , which is derived by taking the average, via summer 454 and divider 455, of  $\theta_{wl}$  and  $\theta_{wr}$ . Accordingly, the  $\theta_w$  value on line 451 is run through processor 456 to determine the quantity



$$\frac{2\pi}{3} \cdot \left\{ \frac{\theta_w}{\left[ \frac{D - r - z}{r} \right]} \right\},$$

which causes the correct amount of cluster rotation in relation to wheel rotation for the stair geometry and is provided as an input to summer 457 along with the initial value of  $\theta_c$ , namely  $\theta_{cst}$ . The output of summer 457 is  $\theta_{cref}$ .

- 5 Although the Figs. 33-45 show analog control algorithms, they have been implemented in a number of embodiments using microprocessor programmed digital control. However, it is wholly within the scope of the present invention to use direct analog controls as well as a hybrid of analog and digital controls. Analog controls have been successfully implemented, for example, in a version  
10 of the vehicle of Fig. 21, using a pair of laterally disposed wheels in lieu of clusters.

#### Speed Limiting

- In a further embodiment, any of the foregoing embodiments of a vehicle in accordance with the present invention may be provided with speed limiting to  
15 maintain balance and control, which may otherwise be lost if the wheels (or arcuate elements) were permitted to reach the maximum speed of which they are currently capable of being driven.

- Speed limiting is accomplished by pitching the vehicle back in the direction opposite from the current direction of travel, which causes the vehicle  
20 to slow down. In this embodiment, the vehicle is pitched back by adding a pitch modification to the inclinometer pitch value. Speed limiting occurs whenever the vehicle velocity of the vehicle exceeds a threshold that is the determined speed limit of the vehicle. The pitch modification is determined by looking at the difference between the vehicle velocity and the determined speed limit,  
25 integrated over time. The pitch modification sequence is maintained until the vehicle slows to the desired dropout speed (some speed slightly below the speed limit), and then the pitch angle is smoothly returned to its original value.

One method for determining the speed limit of the vehicle is to monitor the battery voltage, which is then used to estimate the maximum velocity the vehicle is currently capable of maintaining. Another method is to measure the voltages of the battery and the motor and to monitor the difference between the two; the difference provides an estimate of the amount of velocity margin currently available to the vehicle.

#### Use of Sensors in Stair-Climbing

As described in connection with Fig. 37 above, stair climbing and other obstacle traversal may be effectuated utilizing a lean mode, and the climb ratio may be selected manually or automatically. This section describes how sensors may be utilized in a further embodiment to achieve automatic adjustment of the climb ratio. In the lean mode, clusters are the "masters" and wheels are "slaves." The climb ratio expresses the ratio between cluster rotation and wheel rotation. For example:

- i) A climb ratio of zero means that the wheels do not move at all when the clusters move.
- ii) A climb ratio of 0.25 means that the wheel makes 1/4 rotation in the same direction as the cluster for each cluster rotation.
- iii) A climb ratio of -0.5 means that the wheel makes 1/2 rotation in the direction opposite to the cluster for each cluster rotation.

Referring now to Figs. 46 and 47, there is shown a vehicle having an arrangement such as a chair 461 for supporting a human subject. The chair 461 has associated with it a ground-contacting module in the form of a pair of clusters 462, each motor-driven and each having a plurality (here three) of wheels 463. The wheel set of each cluster is also motor-driven. The clusters 462 are linked in this case by a tube in which may be housed the cluster motors. The clusters 462 are part of an assembly that includes the chair 461, which is mounted to the cluster tube via thigh and calf linkages 466 and 464 respectively and motor-driven hip and knee joints 467 and 465 respectively. The hip, knee, and cluster drives function in concert to affect a height change of the seat 461. Note that the cluster drive is acting as an ankle in this case, as it rotates the calf about

the cluster. The cluster attitude is maintained by the balancing algorithm. The vehicle of this embodiment is provided with a sensor A, looking in a forward direction along path 468 and mounted just above the cluster tube, far enough above level ground to sense the riser of the second step of stairs 460 to be  
5 climbed. (Note that if a curb is being climbed, no riser would be sensed.) Sensor A is used only when ascending stairs. The vehicle of this embodiment is also provided with sensor B, looking in a downward direction along path 469 and mounted to the cluster tube. It senses the distance from its face to the ground below. It is placed in front of the tube, far enough above level ground to sense  
10 the tread of the step about to be climbed. Sensors A and B may be of any type known in the art, including ultrasonic, for sensing distance.

As shown in Fig. 47, when the vehicle is descending, sensor B senses the end of the step that the device is currently on, by detecting the change in height. Sensor C is mounted to the footrest of chair 461, and looks in a downward  
15 direction along path 471. It senses the distance from its face to the ground below. This sensor is only used when descending. It is placed far enough above ground and far enough ahead of the cluster tube to see the edge of the upper landing when preparing to descend.

In this embodiment, to ascend stairs, the driver of the vehicle issues a  
20 "climb up" command via the driver's interface while in balance mode. The seat is then automatically raised to full height, allowing the driver's feet to clear the steps in front of the driver. The vehicle is then driven towards the stairs. When sensor B senses a step (as a change in distance from the sensor to the ground), the vehicle enters lean mode, causing it to "fall" onto the first step (two wheels on the  
25 lower landing, two on the first step). Once the vehicle is in lean mode, the center-of-gravity (CG) is automatically shifted forward. This shift makes it easier for the driver to lean forward. The driver leans forward to create a pitch error. As a result, the cluster balancing algorithm applies a torque to the cluster motors. This torque rotates the clusters and causes the device to ascend the stair.

30 An algorithm is employed to adjust dynamically the climb ratio at the instant the transition is made from four wheels on two steps to two wheels on

one step. This pertinent instant is determined not by a sensor, but by looking for the following information to be true:

- i) the vehicle was told to ascend,
- ii) shift is done,
- 5    iii) clusters have made  $2\pi/3$  rotations since the last climb ratio adjustment,
- iv) cluster position is within a certain window,
- v) the cluster torque command was below a certain threshold and the derivative of the command was negative (corresponding to setting
- 10    wheels down on the step), and
- vi) the cluster torque command is above a certain threshold and the derivative of the command is positive (corresponding to lifting wheels off the step).

At the pertinent instant above, the algorithm uses sensor A to determine the

15 distance to the next step, the fact that it will take  $2\pi/3$  rotations of the cluster to get to the next step, and the wheel radius to calculate the climb ratio. If sensor A reads out-of-range (no riser, ready to step onto a landing), or a distance beyond a certain threshold (too far to riser, must go to balance mode first), it is noted that this is the last step; then the control goes to last step processing. This procedure is

20 repeated for each successive step until the last step..

At the last step, the CG is shifted back to center, and the height is lowered. Although this makes it more difficult to lean-up the last step, it makes the vehicle more stable once on the landing. A large climb ratio is selected to push the vehicle well onto the landing for the transition to balance mode. The driver again

25 leans forward. When it is determined that a zero crossing (defined above in connection with Fig. 38) has occurred, the vehicle switches to balance mode. It is now balancing on the upper landing using its wheels.

Descent is handled in a manner analogous to ascent. The driver issues a "climb down" command via the driver's interface while in balance mode. The

30 seat is automatically lowered to minimum height (if not already there). This is primarily to increase the feeling of security in the driver. Sensor C is quite far out

front of the wheels, so that the vehicle does not need to be too close to the edge of the step while in balance mode. Since the vehicle will be so far from the edge when lean mode is entered, the climb ratio is adjusted to a fairly high value. This allows the vehicle to reach the edge of the step once lean mode is entered.

- 5 When sensor C senses a step (as a change in distance to the ground), the vehicle enters lean mode. Once in lean mode, the center-of-gravity (CG) is shifted rearward. This shift makes it easier for the driver to lean back to control descent. To descend, the driver first leans forward to create a pitch error, causing the vehicle to descend the stairs. Approximately half-way through the rotation, the
- 10 driver must lean back slightly to slow the descent onto the next stair.

The climb ratio is adjusted by using down-looking sensor B to sense the end of the step the wheels are currently on. The climb ratio is adjusted to a large positive value when no edge is sensed (cluster command signal positive, climb ratio either negative or nominal, and sensor B below a certain threshold). The

- 15 large positive climb ratio causes relatively rapid rolling of the wheels, so that the vehicle soon reaches the edge of the current step. This action establishing the large positive climb ratio will be overridden, however, if it causes the vehicle to get too close to the edge:

- i) The climb ratio is set to a nominal positive value when sensor B senses the
- 20 edge (distance greater than a specified threshold and the climb ratio is positive). Once this value is set, it should suffice to get the vehicle into the proper position.
- ii) The climb ratio is adjusted to a small negative value if it is determined that the vehicle is too close to the edge (cluster signal positive, climb ratio
- 25 either negative or nominal, and sensor B above a certain threshold). The negative climb ratio rolls the wheels back as the cluster rotates, keeping the vehicle safely on the current step.

- The descent pattern is repeated for each step. Once the vehicle reaches the landing at the bottom of the stairs, both sensors B and C sense no more steps
- 30 (sensor readings below certain thresholds). When this occurs, the vehicle transfers to the balance mode.

### Mode Transitions

Although transitions between lean mode and balance mode of the vehicle of Figs. 46 and 47 may be managed as described in connection with Fig. 38, in a further embodiment of a vehicle in accordance with the present invention, the transition between modes may be managed on a more active and continuous basis. This embodiment utilizes joints 465 and 467 to control height of seat 461 and joint 467 in particular to control tilt of the seat 461. In lean mode, the vehicle has four wheels on the ground (two on the ground from each cluster) so that it may climb stairs or move over obstacles. The cluster motor output is adjusted according to the inclinometer pitch and pitch rate, and cluster encoder velocity. Transition to balance mode occurs when the Lean/ Balance switch is pressed.

In transition to balance mode, the center of gravity is shifted over the front ground-contacting wheel of each cluster. To accomplish this, an artificial pitch error is created by gradually increasing an offset added to the inclinometer reading. This artificial pitch error causes the cluster balancing algorithm to apply a torque to the cluster motors, causing rotation of the clusters. This torque pitches the seat forward, moving the seat over the front wheels, in proportion to the artificial pitch error. (Simultaneously, the same offset may be used to command a new desired position in the seat tilt, determined by joint 467 of Fig. 46, thereby keeping the seat level.)

When the cluster position is greater than the prescribed cluster transition angle (which may be based upon the amount of CG shift), the transition velocity of the cluster is initialized to the speed at which the cluster is currently moving, and balance mode is entered.

At the time balance mode is entered, the clusters have been rotated only partially, and the rear pair of wheels are typically about 2-5 cm above the ground. When entering balance mode, each of the clusters must be rotated from its current position until its "leg" (as defined in item 2 following Table 1) and "post" (also as defined in item 2) are vertical as in Fig. 46. This is accomplished by rotating the cluster at a prescribed velocity, gradually adjusted from the initialized transition velocity of the cluster. In this manner, cluster rotation

continues smoothly on entry into the balance mode until the cluster reaches its target position. During this cluster rotation, the artificial pitch error is reduced to keep the CG over the ground contacting elements until it is entirely removed entirely from the inclinometer reading. If this were not done, the device would  
5 translate (in balance mode) because of the artificial pitch error.

Cluster position may be used to command seat tilt, thereby keeping the seat level as the seat post moves rearward. Once the cluster leg and post are vertical (clusters have stopped rotating) and the seat is level, the transition to balance mode from lean mode is complete.

10 If the Lean/Balance switch is pressed when the vehicle is in balance mode, transition to lean mode is entered. The desired cluster position is gradually changed from the initial position (where the cluster leg and post are vertical) to a final desired position (where the front pair of wheels are at a prescribed distance above the ground). Simultaneously, an artificial pitch error is introduced to keep  
15 the CG over the balancing wheels. Again, cluster position may be used to command seat tilt, thereby keeping the seat level as the seat post moves rearward.

Once the cluster has rotated to a position where the second pair of wheels are within a prescribed distance above the ground, lean mode is entered,  
20 causing the device to drop onto four wheels. Once the vehicle is in lean mode, the artificial pitch error that kept the cluster post pitched rearward and the seat tilted forward is promptly, but smoothly, removed. As a result, the applied cluster torque causes the cluster post to rotate forward to its vertical position. Simultaneously, the torque may be applied to the seat tilt to keep the seat level.  
25 Once the cluster post is vertical and the seat level, the transition from balance mode to lean mode is complete.

#### Configuration Using Harmonic Drives

In a further embodiment of the invention, the embodiment of Figs. 46 and 47 has been realized mechanically in a configuration, similar that of Figs. 9-12,  
30 utilizing harmonic drives. This configuration is shown in Figs. 48-52.

Fig. 48 is a partially cut away vertical section viewed from the front

showing the overall mechanical layout of the vehicle of this embodiment. In this view can be seen, among other things, the seat frame 481, the hip assembly 482, the thigh linkage 483, the knee assembly 484, the calf linkage 486, and the wheels 485.

5            Fig. 49 is an expanded view of a part of Fig. 48, showing mechanical details of the cluster portion of the vehicle. Wheel motors 4913 on left and right sides drive the wheels 485 on left and right sides respectively; the wheels on any given side are powered synchronously. The wheels are driven via a two-stage reduction. In the first stage, the motor 4913 turns wheel drive pulley 496 to move  
10 timing belt 495. In the second stage are employed three sets 4911 of herringbone gears, one for each wheel, to drive the wheel drive shaft 4912. The side of each of the motors 4913 that is not coupled to the wheel drive pulley is coupled to a shaft encoder 4914. Both clusters in this embodiment are driven by the same motor 4924 via a three-stage reduction. In the first stage, the motor 4924 turns cluster  
15 drive pulley 4921. The pulley 4921 causes motion of a timing belt. The timing belt is best seen as item 501 in Fig. 50, which shows detail of the cluster drive arrangement. The timing belt 501 drives a second stage of helical gears, including first gear 502 and second gear 4922. The second gear 4922 drives a pair of intermediate shafts 493, which drive a final set 494 of helical gears at each  
20 cluster. The side of the cluster motor 4924 that is not coupled to the cluster drive pulley 4921 is coupled to a shaft encoder 4925. The far side of the shaft turning the cluster drive pulley 4921 is coupled to cluster brake assembly 4926, which may be used to lock the clusters in position when the vehicle is parked or in the balance mode. The housings of the two wheel motors 4913 and the cluster motor  
25 4924 are bolted together to form a tube, which provides the structure joining the cluster assemblies. The calf 486 is rigidly affixed to this structure.

Fig. 51 shows an end view of a cluster. The single timing belt 495 of Fig. 49 is shown driven by wheel drive pulley 496 in the center of the cluster. The timing belt 495 drives a larger pulley 511 on each of the three legs. This larger  
30 pulley 511 drives a gear set including pinion gear 512 and output gear 513 which drives the wheel 485. The four idler pulleys 514 keep the belt 49 from interfering



with the cluster housing 515 and also provide maximum wrap angle around the drive pulley.

Fig. 52 shows the mechanical details of the hip and knee joints. Both joints are mechanically identical. The motor magnet rotor 5211, acted on by stator 5212, turns a shaft 5213, mounted in bearings 522 and 5272. The shaft 5213 rotates the wave generator 5271, which is an approximately elliptically shaped piece, rotating within bearing 5272. The wave generator 5271 causes the harmonic drive cup 5262 to incrementally engage and disengage its teeth with the harmonic drive spline 5261. This process causes the thigh 483 to move with respect to the calf 486 or seat frame 481 with a very high reduction ratio. An electromagnetic power off brake having electromagnet 5281 and brake pad 5282 can be applied to the wave generator 5271 to prevent the joint from rotating. This allows the motor to be turned off when the joint is not being actuated. A potentiometer 524 is geared through gear train 5241 to the harmonic drive cup 5262 to give absolute position feedback, while an encoder (not shown) is fixed to the motor shaft at position 523 to provide incremental position information.

#### Multiple Processors

Although the embodiment of Fig. 27 shows use of a single micro controller board 272, we have found it advantageous in some embodiments to utilize a number of microprocessors operating in parallel. In a further embodiment, for example, applicable to the mechanical design discussed in connection with Figs. 48-52, there are employed four different microprocessors operating in parallel, each of which posts messages to a communications bus, allowing the microprocessors to monitor each other. There is also a technician's interface (TI) which allows the technician to change gains, reprogram the processor etc. The four different microprocessors control the different components of the system as follows: microprocessor 1 controls the button, the knee and hip, and the joystick (x and y axes); microprocessor 2 controls distance measurement, presence checking (for a person), battery monitoring, and user interface (thereby controlling modes of the vehicle); microprocessor 3 controls the cluster balancing algorithm; microprocessor 4 controls wheel balancing algorithms. Additional

processors may be desirably employed, depending on the complexity of the distance measurement and other issues. This will not necessarily limit the number of processors.

The advantages of the parallel processing realized by this embodiment are: safety (each microprocessor operates independently, so that failure of one microprocessor will not mean failure of all functions); ability to more easily develop redundant systems; reduced power requirements (multiple less powerful microprocessors which together are as powerful as a PC); and simultaneous operations (multiple slower microprocessors can operate at the same processing speed as the PC).

#### Further embodiments

The present invention may also be implemented in a number of further embodiments. We have found that a vehicle in accordance with the invention may act suitably as a prosthetic device for persons who have an impairment, caused by disease (such as Parkinson's Disease or ear disorders) or defect, in their ability to maintain balance or to achieve locomotion. The prosthetic device achieved by the vehicle functions as an extension of the person's own balance system and locomotion system, since the vehicle has a feedback loop that takes into account changes in the vehicle's center of gravity attributable to motion of the person relative to the vehicle. Providing a vehicle to such a handicapped person is thus a method of fitting a prosthesis that permits locomotion and balance control when these would otherwise be unavailable. We have observed a dramatic restoration of balance and locomotion control to a person suffering from Parkinson's Disease who utilized a vehicle in accordance with embodiments of the present invention.

Given the complex contributions from the human driver in utilizing various embodiments of the vehicle of the present invention to achieve locomotion over varied conditions, it is not surprising that visual orientation and displacement information is typically of great importance in general and in utilization of these embodiments. Nevertheless, there may be circumstances when the visual information is either impaired (owing to darkness or disability)

- 43 -

or insufficient. In a further embodiment of the present invention, the vehicle is provided with one or more non-visual outputs to indicate orientation or direction and velocity. Such outputs may be tactile, for example, or sonic; the outputs are modulated by a modulator to reflect the vehicle's speed and

5 orientation. Shown in Fig. 53, for example, is the case of a sonic output generated by generator 531, and modulated by modulator 532 having orientation and speed inputs 533 and 534 respectively. In this case, a repeated tone may be employed: the *rate* of repetition of the tone may be used to indicate speed and the

10 *pitch* of the tone may be used to indicate direction of motion and orientation (forward, for example, with a higher pitch; backward with a lower pitch; upright with a center pitch), and the degree of change in pitch indicative of the extent of lean, i.e., vehicle pitch angle (with the effect that here sound pitch is equated with vehicle pitch).

What is claimed is:

1. A vehicle, for transporting a human subject over ground having a surface that may be irregular, the vehicle comprising:

- (a) a support for supporting the subject;
- 5 (b) a ground-contacting module, movably attached to the support, for suspending the subject in the support over the surface, the orientation of the ground-contacting module defining fore-aft and lateral planes; the support and the ground-contacting module being components of an assembly;
- (c) a motorized drive, mounted to the assembly, for causing locomotion of
- 10 the assembly and the subject over the surface; and
- (d) a control loop, in which the motorized drive is included, for dynamically enhancing stability in the fore-aft plane by operation of the motorized drive.

2. A vehicle according to claim 1, wherein the ground-contacting module

15 is disposed so as to contact the ground at a plurality of laterally disposed locations and to suspend the subject in the support over the surface in a configuration during locomotion that lacks inherent stability, but for the control loop, at least a portion of the time in the fore-aft plane but is relatively stable in the lateral plane.

20 3. A vehicle according to claim 2, wherein the ground-contacting module includes a pair of ground-contacting members, laterally disposed with respect to one another.

4. A vehicle according to claim 3, wherein each ground-contacting member includes a wheel, the vehicle further comprising:

25 wheel control means for controlling the rotation of each of the wheels separately, the wheel control means having a balance mode, utilizing the control loop, in which the wheels are driven in such a manner as to maintain balance of the vehicle in the fore-aft plane.

5. A vehicle according to claim 3, wherein each ground-contacting

30 member includes a cluster of wheels for contacting the ground, each cluster being rotatably mounted on and motor-driven about a laterally disposed central

axis, and each of the wheels in each cluster being rotatably mounted about an axis parallel to the central axis, the wheels being capable of being motor-driven independently of the cluster.

6. A vehicle according to claim 5, wherein the central axes of the clusters  
5 are so disposed as to be substantially coincident with one another.

7. A vehicle according to claim 6, wherein the distance from the central axis through a diameter of each wheel is approximately the same for each of the wheels in the cluster.

8. A vehicle according to claim 6, wherein each cluster has two wheels of  
10 substantially equal diameter.

9. A vehicle according to claim 6, wherein each cluster has three wheels of substantially equal diameter.

10. A vehicle according to claim 3, wherein each ground-contacting member includes a plurality of axially adjacent and rotatably mounted arcuate  
15 element groups, the arcuate elements of each group being mounted to a support member, each support member being rotatably mounted and motor-driven about a central axis.

11. A vehicle according to claim 10, wherein the radially outermost extent of each arcuate element has a generally constant main radius of curvature  
20 conforming generally with that of a circle having a radius equal to such extent.

12. A vehicle according to claim 11, wherein each arcuate element has a leading portion and a trailing portion determined in relation to forward motion of the assembly, the leading portion contacting the ground first during forward motion, each portion having a tip, and wherein the radius of curvature of the  
25 arcuate element near the tip of each leading portion is somewhat smaller than the element's main radius of curvature.

13. A vehicle according to claim 11, wherein each arcuate element has a leading portion and a trailing portion determined in relation to forward motion of the assembly, the leading portion contacting the ground first during forward  
30 motion, each portion having a tip, and wherein the radius of curvature of each arcuate element near the tip of its trailing portion is somewhat smaller than such

element's main radius of curvature.

14. A vehicle according to claim 11, wherein each arcuate element has a leading portion and a trailing portion determined in relation to forward motion of the assembly, the leading portion contacting the ground first during forward  
5 motion, each portion having a tip, and wherein the radius of curvature of each arcuate element near at least one of its tips differs from the main radius of curvature.

15. A vehicle according to claim 11, wherein each arcuate element has a leading portion and a trailing portion determined in relation to forward motion  
10 of the assembly, the leading portion contacting the ground first during forward motion, each portion having a tip, and wherein at least one of the tips of each arcuate element is deflectably mounted and is coupled to a deflection arrangement, so that on actuation the local radius of curvature may be modified.

16. A vehicle according to claim 6, further comprising:  
15 cluster control means for controlling the angular orientation of each cluster about the central axis; and

wheel control means for controlling separately, as to the wheels of each cluster, the rotation of wheels in contact with the ground.

17. A vehicle according to claim 16, wherein the wheel control means has a  
20 balance mode, utilizing the control loop, in which the wheels of each cluster in contact with the ground are driven in such a manner as to maintain balance of the vehicle in the fore-aft plane.

18. A vehicle according to claim 16, wherein the wheel control means has a  
25 slave mode in which the wheels are driven as a function of the rotation of the clusters; and the cluster control means has a lean mode, utilizing the control loop, in which the clusters are driven in such a manner as to tend to maintain balance of the vehicle in the fore-aft plane while the wheels are in the slave mode, so as to permit the vehicle to ascend or descend stairs or other surface features.

30 19. A vehicle according to claim 18, wherein the wheel control means has a balance mode, utilizing the control loop, in which the wheels of each cluster in

contact with the ground are driven in such a manner as to maintain balance of the vehicle in the fore-aft plane.

20. A vehicle according to claim 19, wherein the wheel control means has a wheel transition mode, used in the transition from the slave mode to the balance  
5 mode, operative to prevent entering the balance mode until a zero crossing by the clusters has been sensed.

21. A vehicle according to claim 16, further comprising:  
coordination control means for coordinating operation of the cluster  
control means with that of the wheel control means, the coordination control  
10 means having a stair climbing mode to cause steps as follows:

(1) start, in which the assembly, balanced on a first wheel pair, one from each cluster, is disposed adjacent to a stair and the clusters are then rotated so that a second wheel pair is resting on the stair;

(2) transfer weight, in which the weight of the vehicle and the subject is  
15 transferred from the lower first wheel pair to the second wheel pair on the stair by motion of the clusters relative to the assembly while the wheels are driven to maintain the position of the clusters relative to the world;

(3) climb, in which the second wheel pair is driven to move the vehicle forward to the riser of the succeeding stair while simultaneously the clusters are  
20 driven to position the next wheel pair on the tread of the succeeding stair, this step being carried out while the wheel control means is in the balance mode;  
and wherein steps (2) and (3) are alternated until the last stair, at which point normal balance mode of the wheel control means is entered into.

22. A vehicle according to claim 18, further comprising:  
25 slave function adjustment for modifying the function in the slave mode, so that the vehicle may accommodate climbing and descent of stairs and of other surface features having varying geometries.

23. A vehicle according to claim 6, further comprising:  
a joystick for use by the subject in controlling direction of the vehicle.

30 24. A vehicle according to claim 6, further comprising:  
leaning means for sensing leaning of the subject in a given direction and

for controlling the motorized drive to cause the vehicle to move in the direction in which the subject may lean.

25. A vehicle according to claim 24, wherein the leaning means includes a force plate.

5        26. A vehicle according to claim 24, wherein the leaning means includes a proximity sensor.

27. A vehicle according to claim 6, wherein the support includes a chair having a seat, hingedly attached to the assembly, so as to have a first position in which the subject may be seated on the seat and a second position in which the  
10    subject may stand.

28. A vehicle according to claim 6, wherein the vehicle has a roll axis and a pitch axis, further comprising:

attitude determination means for determining the attitude of the support;  
attitude control means for controlling the attitude of the support relative  
15    to the ground-contacting member.

29. A vehicle according to claim 28, further comprising:

roll adjustment means for permitting adjustment of the angular orientation of the support with respect to the ground-contacting module about an axis approximately parallel to the roll axis of the vehicle, the roll adjustment  
20    means controlled by the attitude control means.

30. A vehicle according to claim 29, further comprising:

banking means for causing the roll adjustment means, in the course of a turn, to bank the support in the general direction of turning.

31. A vehicle according to claim 28, further comprising:

25        tilt adjustment means for permitting adjustment of the angular orientation of the support with respect to the ground-contacting module about an axis approximately parallel to the pitch axis of the vehicle, the tilt adjustment means controlled by the attitude control means.

32. A vehicle according to claim 6, further comprising:

30        height adjustment means for adjusting the height of the support relative to the ground.



33. A vehicle according to claim 32, wherein the height adjustment means includes a variable extension between the support and the ground-contacting module.

34. A vehicle according to claim 3, wherein the support is proximate to the  
5 ground to permit a subject to stand thereon.

35. A vehicle according to claim 34, further comprising:  
a handle, affixed to the support, having a grip at approximately waist height of the subject, so that the vehicle may be operated in a manner analogous to a scooter.

10 36. A vehicle according to claim 34, wherein the ground-contacting members are wheels.

37. A vehicle according to claim 6, wherein the support is proximate to the ground to permit a subject to stand thereon.

38. A vehicle according to claim 37, further comprising a handle, affixed to  
15 the support, having a grip at approximately waist height of the subject, so that the vehicle may be operated in a manner analogous to a scooter.

39. A vehicle according to claim 10, wherein the support is proximate to the ground to permit a subject to stand thereon.

40. A vehicle according to claim 39, further comprising a handle, affixed to  
20 the support, having a grip at approximately waist height of the subject, so that the vehicle may be operated in a manner analogous to a scooter.

41. A vehicle according to claim 35, further comprising:  
a joystick, mounted on the handle, for use by the subject in controlling direction of the vehicle.

25 42. A vehicle according to claim 38, further comprising:  
a joystick, mounted on the handle, for use by the subject in controlling direction of the vehicle.

43. A vehicle according to claim 40, further comprising:  
a joystick, mounted on the handle, for use by the subject in controlling  
30 direction of the vehicle.

44. A vehicle according to claim 34, further comprising:

leaning means for sensing leaning of the subject in a given direction and for controlling the motorized drive to cause the vehicle to move in the direction in which the subject may lean.

45. A vehicle according to claim 37, further comprising:

5 leaning means for sensing leaning of the subject in a given direction and for controlling the motorized drive to cause the vehicle to move in the direction in which the subject may lean.

46. A vehicle according to claim 39, further comprising:

leaning means for sensing leaning of the subject in a given direction and  
10 for controlling the motorized drive to cause the vehicle to move in the direction in which the subject may lean.

47. A vehicle according to claim 10, further comprising:

drive control means, including the control loop, for driving the support members in a first mode wherein a first arcuate element in each group of axially  
15 adjacent arcuate elements generally remains in contact with the ground up to a point near in arcuate distance to where the next succeeding arcuate element comes in contact with the ground, and so on as successive arcuate elements come in contact with the ground, so as to provide substantially continuous rolling motion of the vehicle along the arcuate elements.

20 48. A vehicle according to claim 47, wherein the drive control means includes means for driving the support members in a second mode to permit ascent and descent of stairs and other surface features.

49. A vehicle according to claim 48, further comprising: means for causing a second one of the arcuate elements of each group to land on a succeeding  
25 surface feature, which may include a step, when a first one of the elements of each group is on a preceding surface feature.

50. A vehicle according to claim 1, wherein the control loop includes means for performing the following steps on a cyclical basis:

- 30 (1) reading inputs provided by the subject;  
(2) reading state variable inputs;  
(3) modifying the program state based upon the state variables; and

(4) performing calculations for controlling the motorized drive based on the subject-provided inputs and the state variable inputs.

51. A vehicle according to claim 1, the vehicle further comprising:

speed limiting means for limiting the speed of the vehicle to a desired  
5 speed threshold below the maximum speed of which the vehicle is currently capable, so that fore-aft stability of the vehicle may continue to be enhanced by the feedback loop.

52. A vehicle according to claim 51, wherein the feedback loop includes an inclinometer to provide an output indicative of the pitch of the vehicle, and the  
10 speed-limiting means includes means for adding a pitch modification to the inclinometer output whenever the vehicle speed exceeds the speed threshold.

53. A vehicle according to claim 52, wherein the pitch modification is a function of the amount by which the speed exceeds the threshold.

54. A vehicle according to claim 53, wherein the speed limiting means  
15 includes speed capability means for determining on a real time basis the maximum speed of which the vehicle is currently capable.

55. A vehicle according to claim 54, wherein the vehicle has an electrical power source to power the motorized drive and the speed capability means has an input for receiving a signal indicative of the output currently provided by the  
20 power source to the motorized drive.

56. A vehicle according to claim 22, the vehicle further comprising:  
sensing arrangement for sensing the physical relation of the vehicle to surface features, the sensing arrangement in communication with the slave function adjustment, so that stairs and other surface features may be negotiated  
25 automatically by the vehicle.

57. A vehicle according to claim 19, the vehicle further comprising  
lean-to-balance transition means for causing a transition in the cluster control means from lean mode to a fixed mode in which the clusters are not rotating and in the wheel control means from slave mode to balance mode.

30 58. A vehicle according to claim 57, wherein the feedback loop includes an inclinometer to provide an output indicative of the pitch of the vehicle, and the

lean-to-balance transition means includes means for adding a pitch modification to the inclinometer output until a first desired angular orientation of the clusters has been achieved.

59. A vehicle according to claim 58, wherein the lean-to-balance transition means includes means, operative when the first desired angular orientation has been achieved, both for causing the wheel control means to enter the balance mode and for smoothly continuing angular rotation of the clusters until a second desired angular orientation has been achieved, whereupon the cluster control means enters the fixed mode.

10 60. A vehicle according to claim 19, the vehicle further comprising balance-to-lean transition means for causing a transition in the cluster control means from a fixed mode in which the clusters are not rotating to lean mode and in the wheel control means from balance mode to slave mode.

15 61. A vehicle according to claim 60, wherein the feedback loop includes an inclinometer to provide an output indicative of the pitch of the vehicle, and the balance-to-lean transition means includes means for causing gradual rotation of the clusters to a first destination angular position while simultaneously adding a pitch modification to the inclinometer output to maintain the vehicle's center of gravity over the balancing wheels.

20 62. A vehicle according to claim 61, wherein the lean-to-balance transition means includes means, operative when the first destination angular orientation of the clusters has been achieved, both for causing the cluster control means to enter lean mode and the wheel control means to enter slave mode and for smoothly removing the pitch modification.

25 63. A vehicle according to claim 1, wherein the control loop includes a plurality of microprocessors, each microprocessor assigned to a separate set of tasks associated with vehicle locomotion and control, in communication with one another over a signal bus.

30 64. A vehicle, for transporting a payload over ground having a surface that may be irregular, the vehicle comprising:

(a) a support for supporting the payload;

- (b) a pair of ground-contacting members, laterally disposed with respect to one another, movably attached to the support, for suspending the payload in the support over the surface, the orientation of the ground-contacting members defining fore-aft and lateral planes intersecting one another at a vertical; the
- 5 support and the ground-contacting members being components of an assembly;
- (c) a motorized drive, mounted to the assembly, for causing locomotion of the assembly and the subject over the surface; and
- (d) a control loop, in which the motorized drive is included, for dynamically enhancing stability in the fore-aft plane by operation of the
- 10 motorized drive;

wherein each ground-contacting member includes a cluster of wheels for contacting the ground, each cluster being rotatably mounted on and motor-driven about a common laterally disposed central axis, and each of the wheels in each cluster being rotatably mounted about an axis parallel to the central axis,

15 the wheels being capable of being motor-driven independently of the cluster.

65. A vehicle according to claim 64, further comprising:

cluster control means for controlling the angular orientation of each cluster about the central axis; and

wheel control means for controlling separately, as to the wheels of each

20 cluster, the rotation of wheels in contact with the ground.

66. A vehicle according to claim 65, wherein the wheel control means has a slave mode in which the wheels are driven as a function of the rotation of the clusters; and the cluster control means has a lean mode, utilizing the control loop, in which the clusters are driven in such a manner as to tend to maintain

25 balance of the vehicle in the fore-aft plane while the wheels are in the slave mode, so as to permit the vehicle to ascend or descend stairs or other surface features.

67. A vehicle according to claim 65, wherein the wheel control means has a balance mode, utilizing the control loop, in which the wheels of each cluster in

30 contact with the ground are driven in such a manner as to maintain balance of the vehicle in the fore-aft plane.

68. A vehicle, for transporting a payload over ground having a surface that may be irregular, the vehicle comprising:

- (a) a support for supporting the payload;
- (b) a pair of ground-contacting members, laterally disposed with respect  
5 to one another, movably attached to the support, for suspending the payload in the support over the surface, the orientation of the ground-contacting members defining fore-aft and lateral planes intersecting one another at a vertical; the support and the ground-contacting members being components of an assembly;
- (c) a motorized drive, mounted to the assembly, for causing locomotion of  
10 the assembly and the subject over the surface; and
- (d) a control loop, in which the motorized drive is included, for dynamically enhancing stability in the fore-aft plane by operation of the motorized drive;

wherein each ground-contacting member includes a plurality of axially  
15 adjacent and rotatably mounted arcuate element groups, the arcuate elements of each group being mounted to a support member, each support member being rotatably mounted and motor-driven about a central axis.

69. A vehicle, for transporting a human subject over ground having a surface that may be irregular, the vehicle comprising:

- (a) a support for supporting the subject;
- (b) a ground-contacting module, movably attached to the support, for  
suspending the subject in the support over the surface, the orientation of the ground-contacting module defining fore-aft and lateral planes; the support and the ground-contacting module being components of an assembly;
- (c) a motorized drive, mounted to the assembly, for causing locomotion of  
25 the assembly and the subject over the surface; and

wherein the ground-contacting module has a configuration that compromises inherent stability with respect to a vertical in the fore-aft plane during locomotion but is relatively stable with respect to a vertical in the lateral  
30 plane.

70. A device according to claim 69, further comprising:

swivel means for mounting the support to the ground-contacting module in such a manner as to permit it to swivel in relation to the module in a plane that is approximately

horizontal and for causing the support thus to swivel by a controllable amount;

5 and

wherein the ground-contacting module includes a pair of legs, disposed laterally with respect to one another, each leg being extendable from the frame in a generally vertical direction by a controllable amount; and

the motorized drive includes step means for driving the swivel means and  
10 the legs in succession in a manner as to cause the assembly and the subject therewith to step on successive stairs.

71. A vehicle according to claim 70, wherein the ground-contacting module includes a pair of wheels disposed laterally with respect to one another and powered by the motorized drive, the vehicle further comprising:

15 a control loop in which the motorized drive is included, for dynamically enhancing stability in the fore-aft plane by operation of the motorized drive.

72. A vehicle according to claim 71, further comprising:

locomotion mode control means for controlling whether the legs or the wheels are active in causing locomotion of the vehicle.

20 73. A vehicle according to claim 69, wherein the ground-contacting module includes a pair of legs, disposed laterally with respect to one another, each leg being extendable from the frame in a generally vertical direction by a controllable amount.

74. A vehicle according to claim 73, wherein the ground-contacting  
25 module includes means for mounting the legs in relation to the support in such a manner as to permit movement of the legs in fore and aft directions, and the motorized drive includes means for driving the legs alternatively to cause them to take steps.

75. An indication system for a vehicle operated by a human subject, the  
30 vehicle having a speed and an orientation, the system comprising:

a non-visual output;

a modulator for modulating the output in accordance with at least one of speed and orientation.

76. A system according to claim 75, wherein the non-visual output is sound having a pitch and a repetition rate, and the modulator is configured to  
5 modulate the pitch and repetition rate.

77. A system according to claim 76, wherein the pitch is modulated in accordance with orientation and the repetition rate is modulated in accordance with speed.

78. A method for compensating for a deficiency in the ability of a subject  
10 to maintain balance and control over locomotion, the method comprising:

(a) providing a vehicle having:

(i) a ground-contacting module, movably attached to the support, for suspending the subject in the support, the orientation of the ground-contacting module defining fore-aft planes; the support and the  
15 ground-contacting module being components of an assembly; and

(ii) a motorized drive, mounted to the assembly, for causing locomotion of the assembly and the subject;

(b) having the subject assume a position on the support; and

(c) utilizing a control loop, in which the motorized drive is included, for  
20 dynamically enhancing stability in the fore-aft plane by operation of the motorized drive.

79. A method according to claim 78, wherein the ground-contacting module includes a pair of wheels laterally disposed with respect to one another.

80. A method according to claim 78, wherein the ground-contacting  
25 module includes a pair of wheel clusters laterally disposed with respect to one another, each cluster being rotatably mounted on and motor-driven about a laterally disposed central axis, the wheels being capable of being motor-driven independently of the cluster.

81. A method according to claim 78, wherein the ground-contacting  
30 module includes a pair of laterally disposed arcuate element groups, each group including a plurality of axially adjacent and rotatably mounted arcuate elements,



- 57 -

the arcuate elements of each group being mounted to a support member, each support member being rotatably mounted and motor-driven about a central axis.

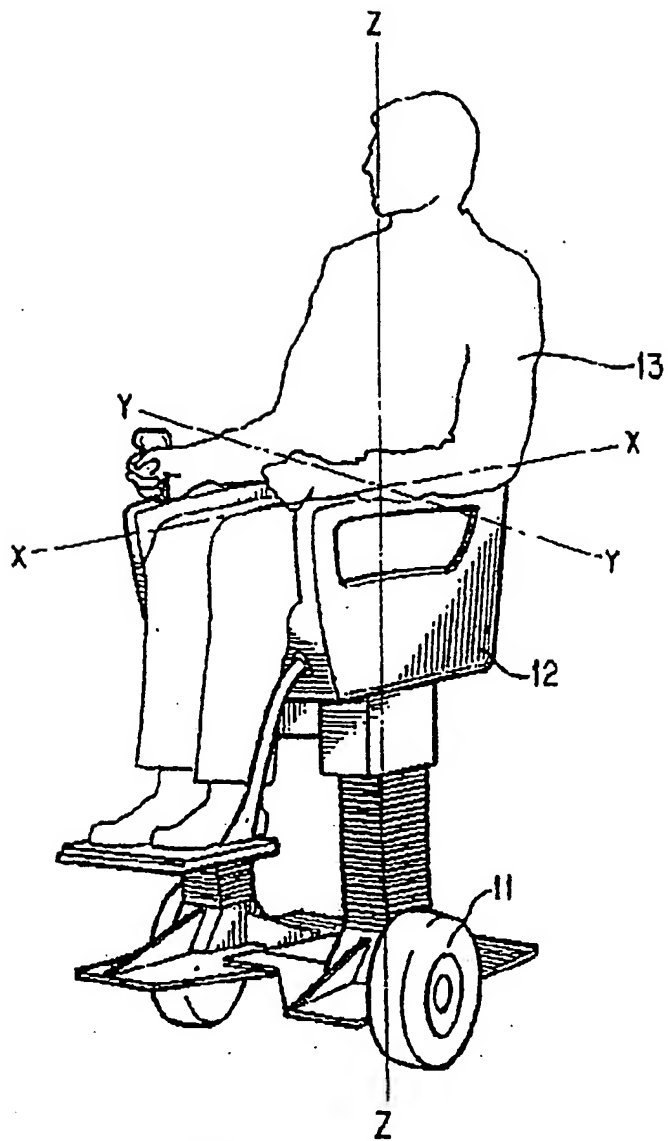


FIG. 1

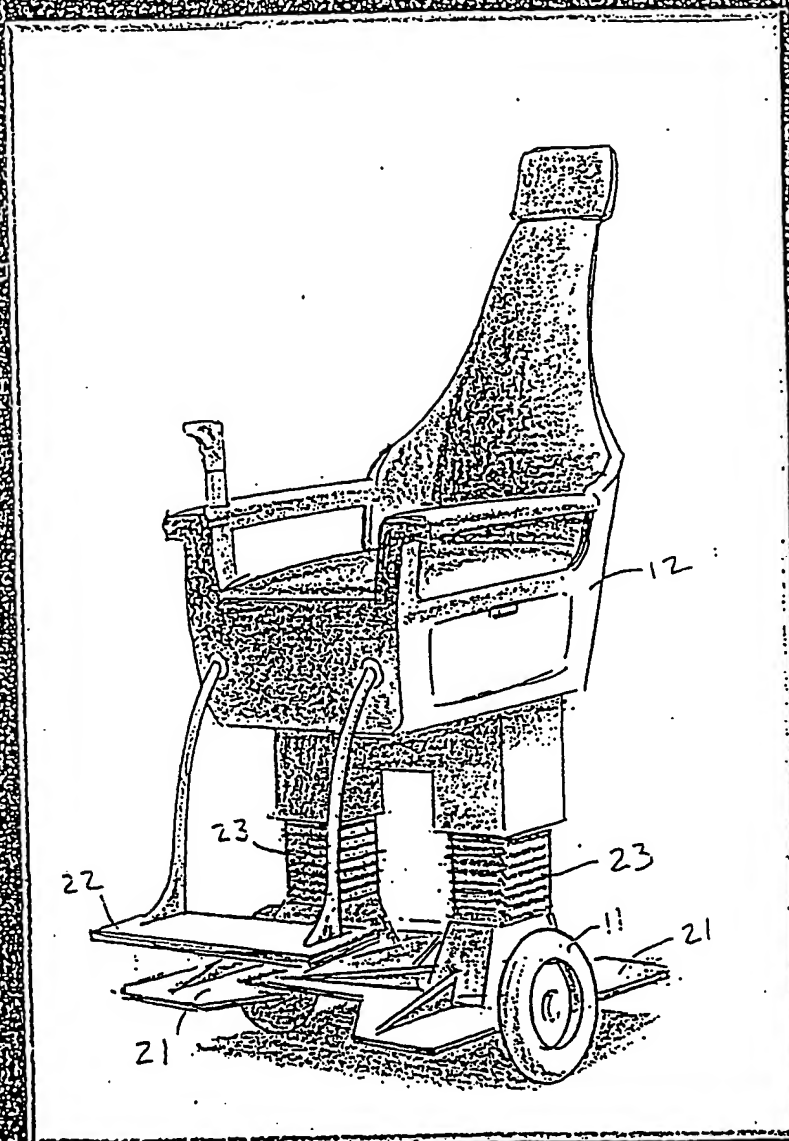


Figure 2

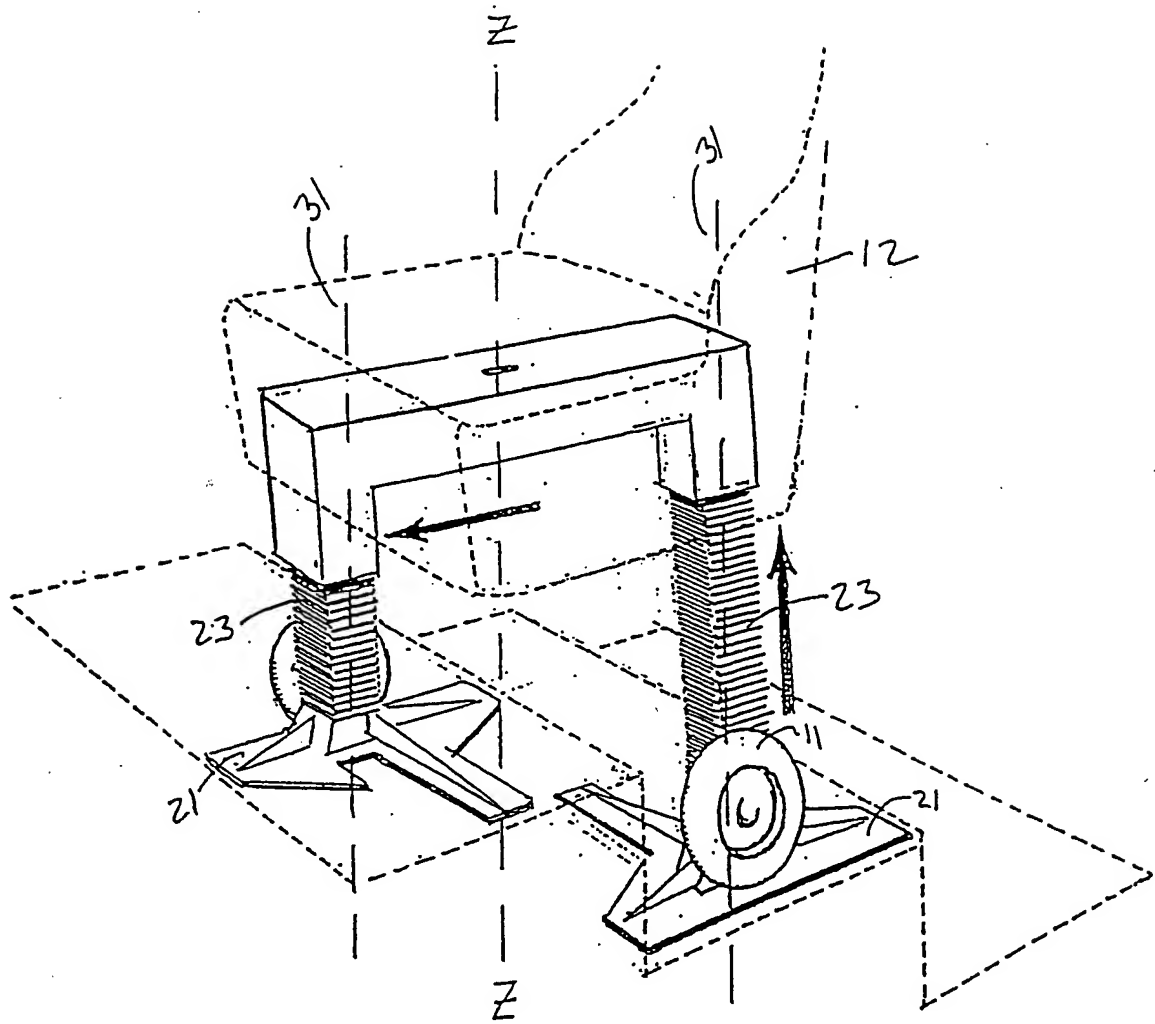
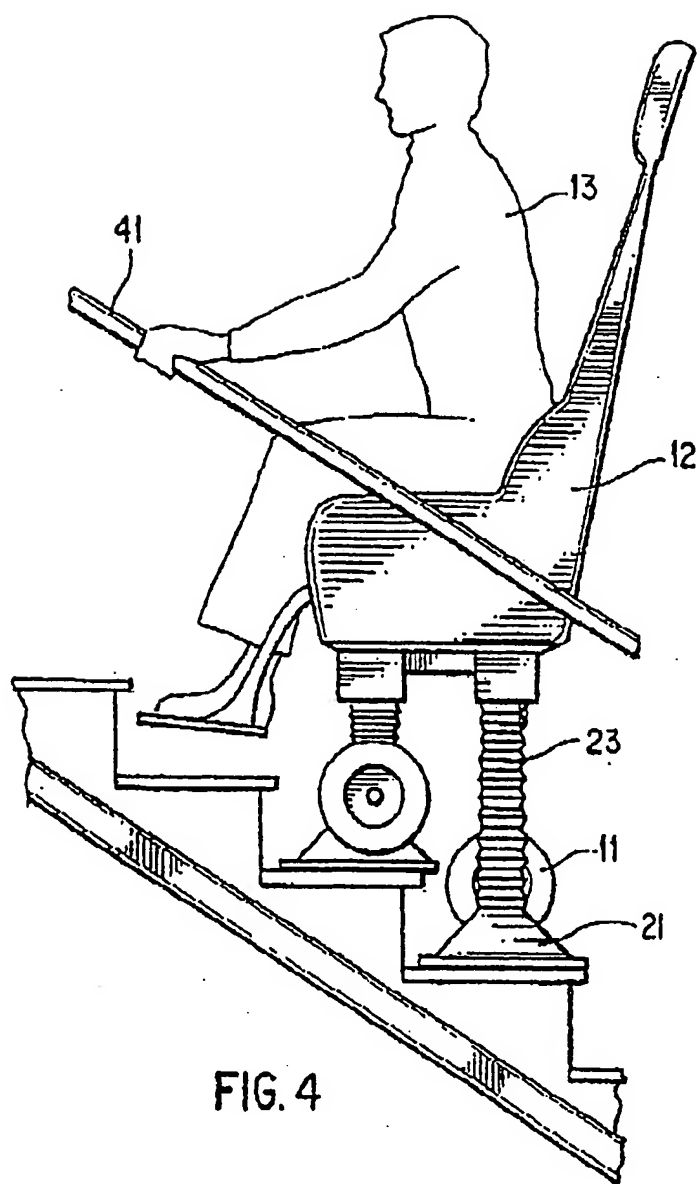


Figure 3



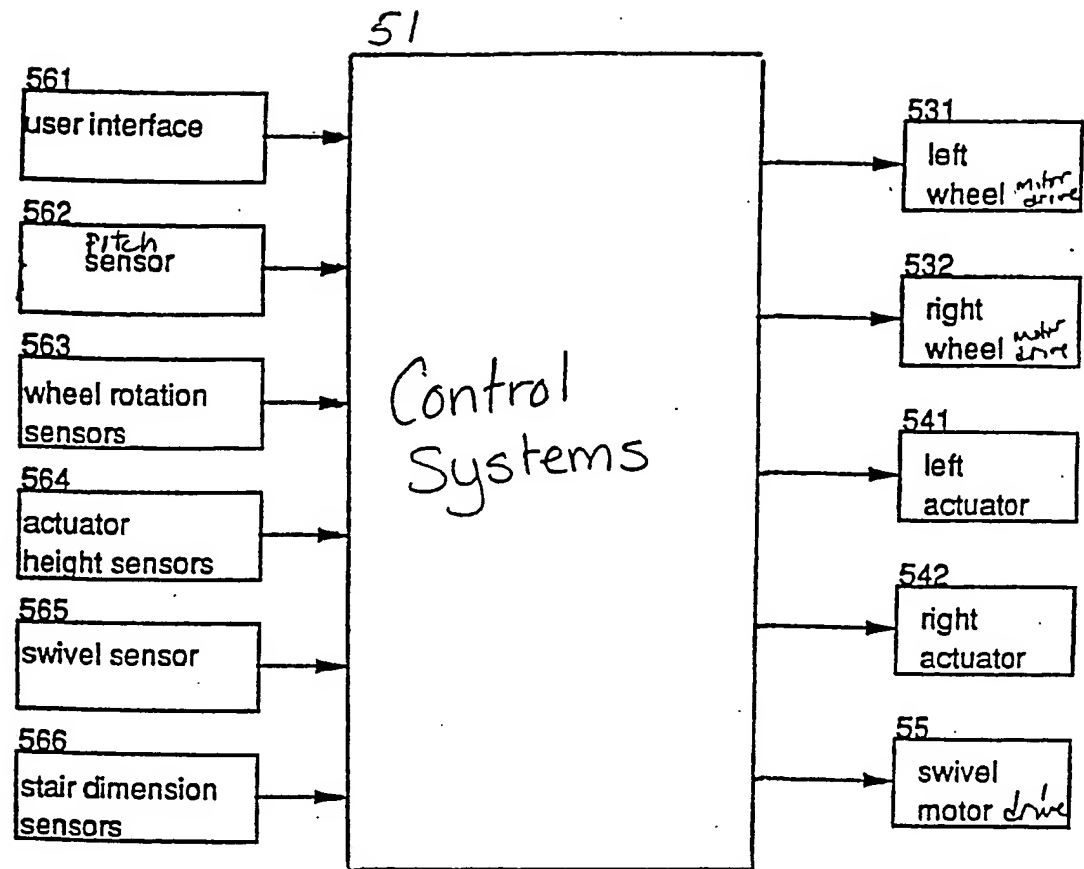


Figure 5

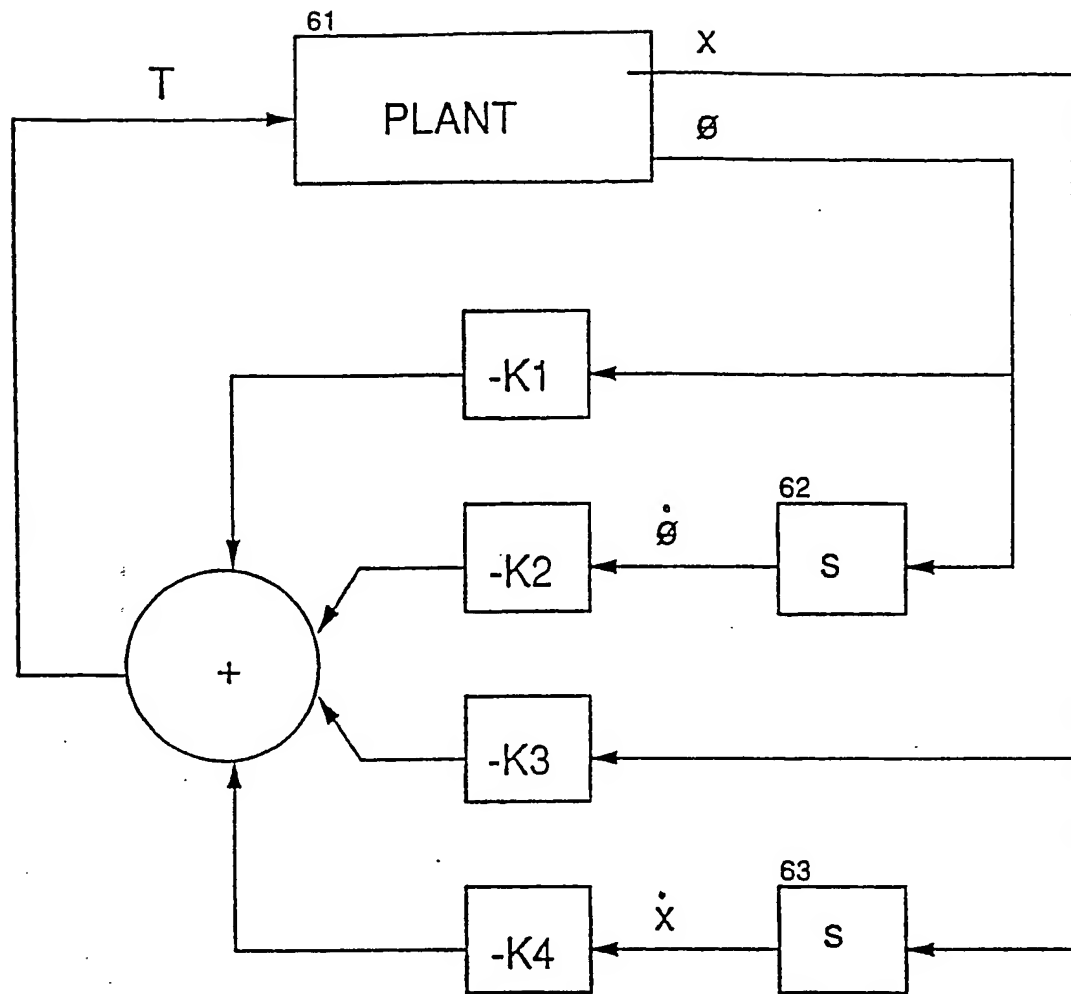


Figure 6

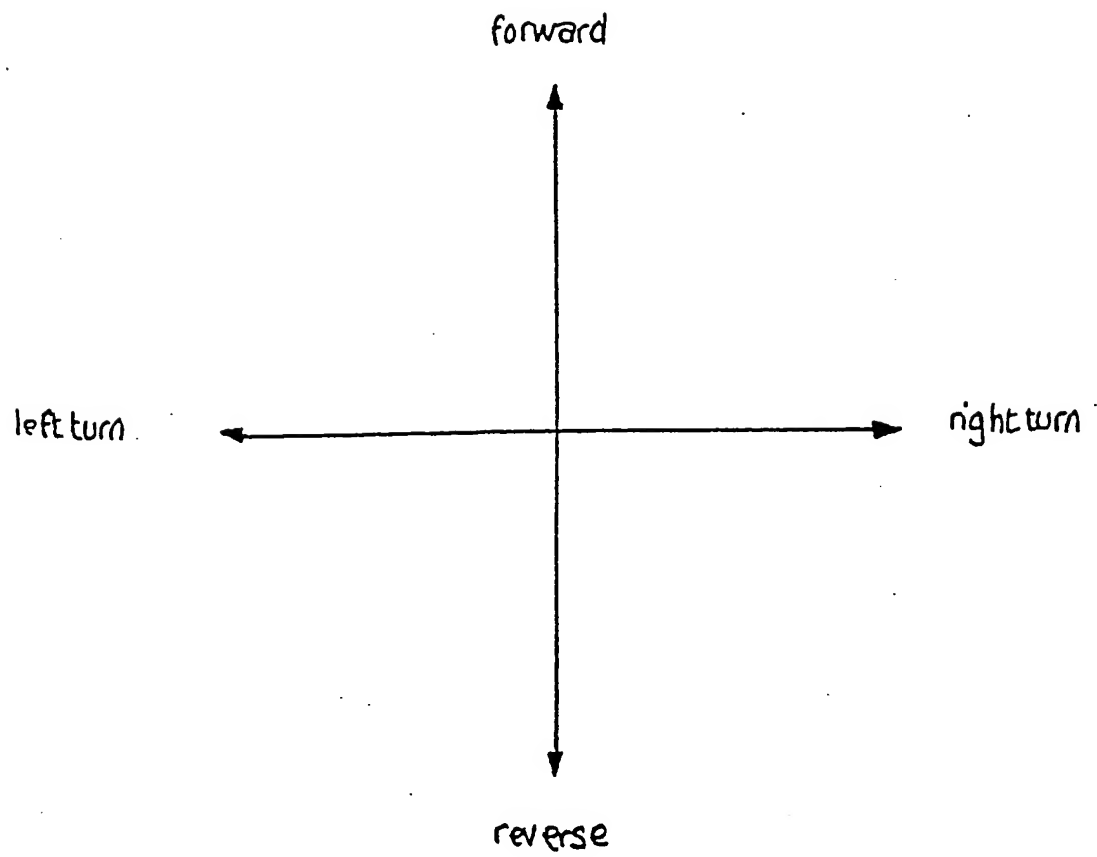


Figure 7



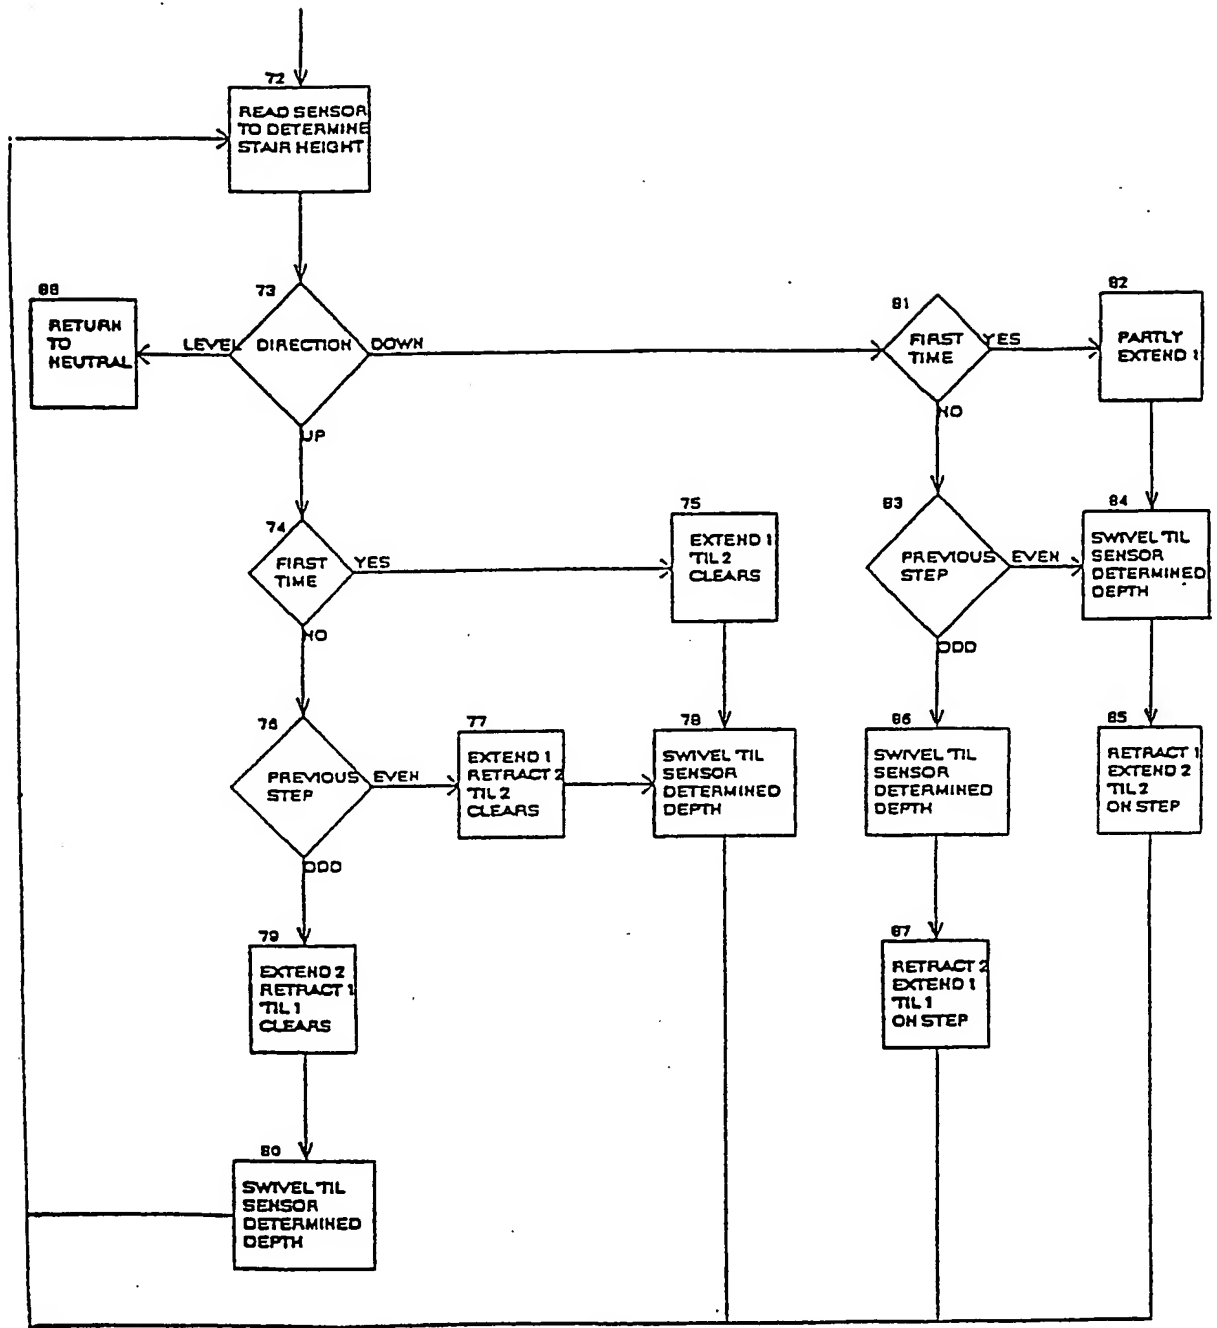
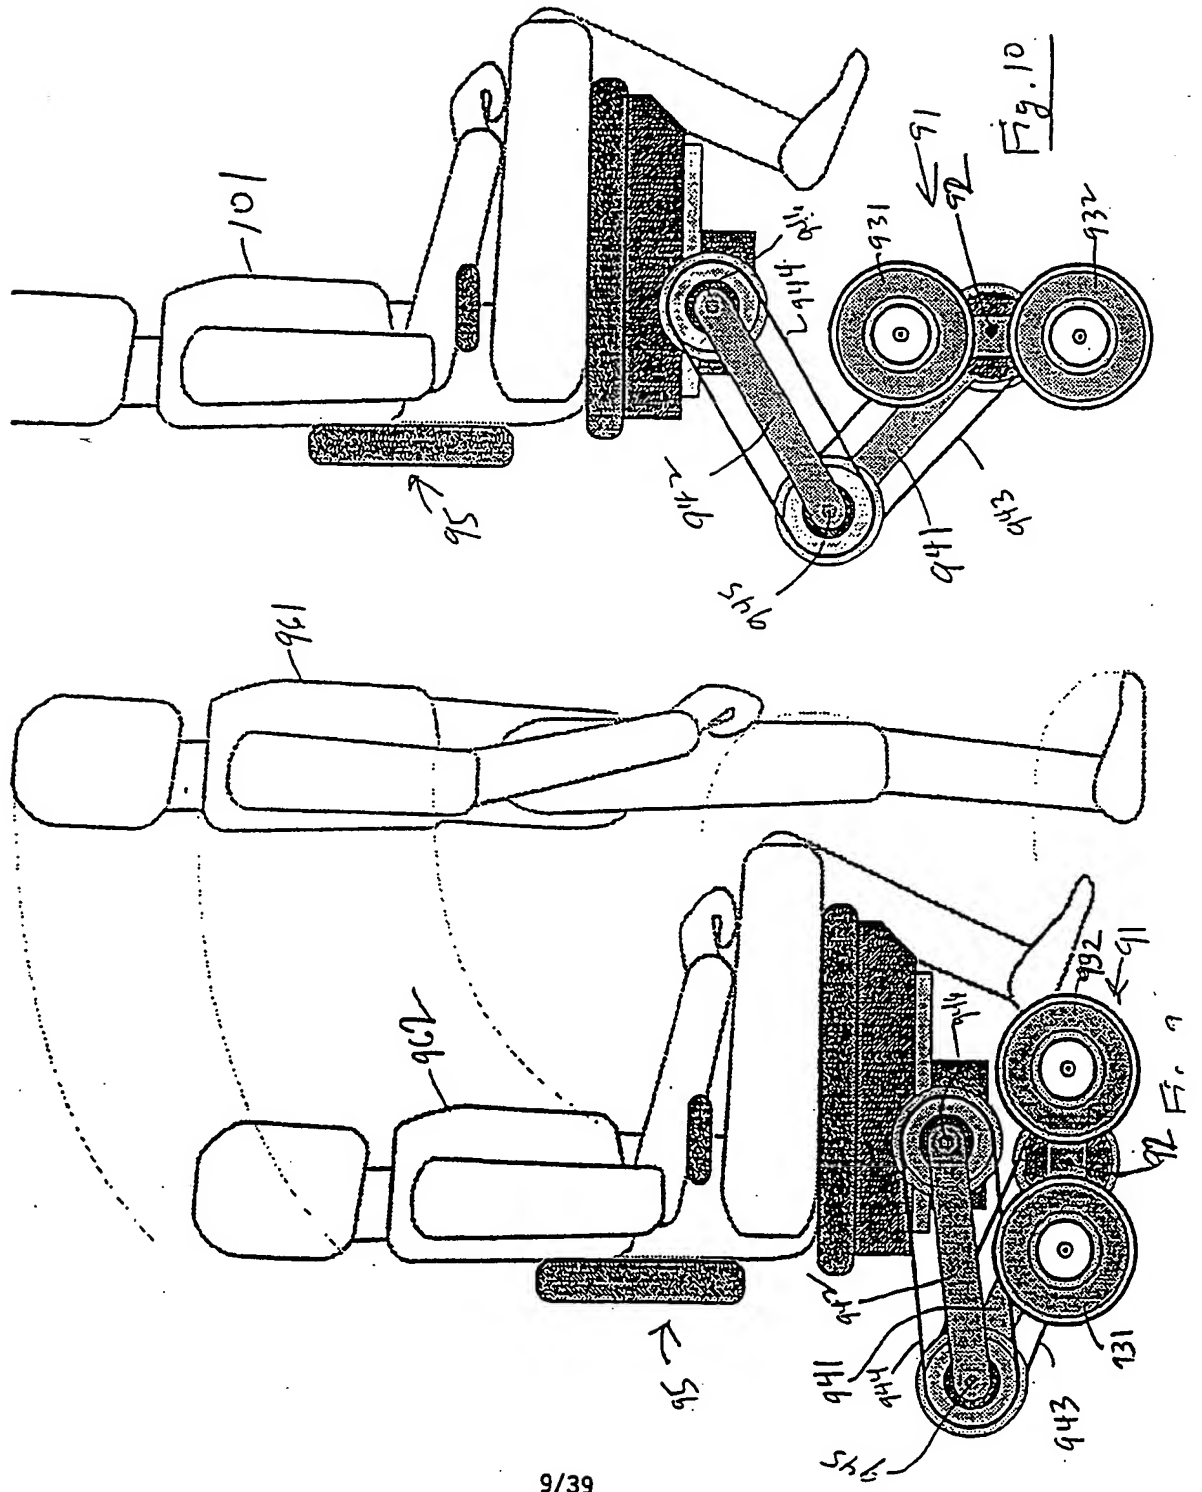
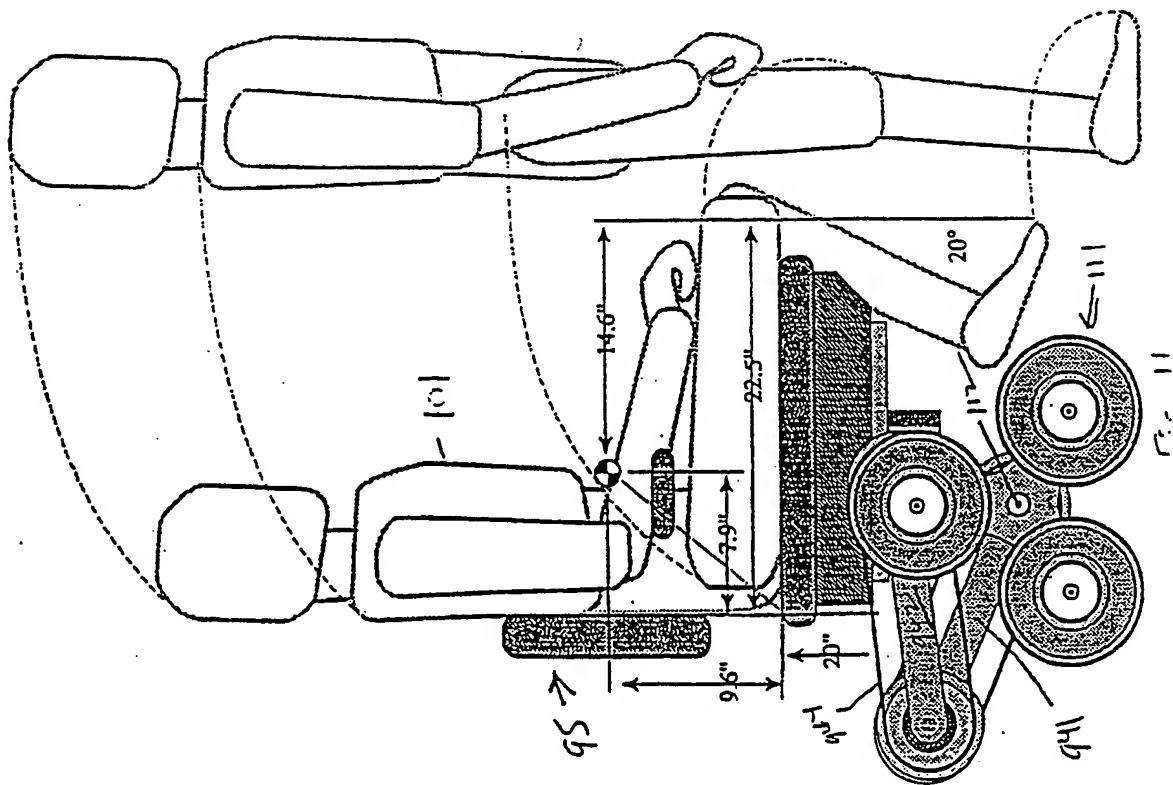
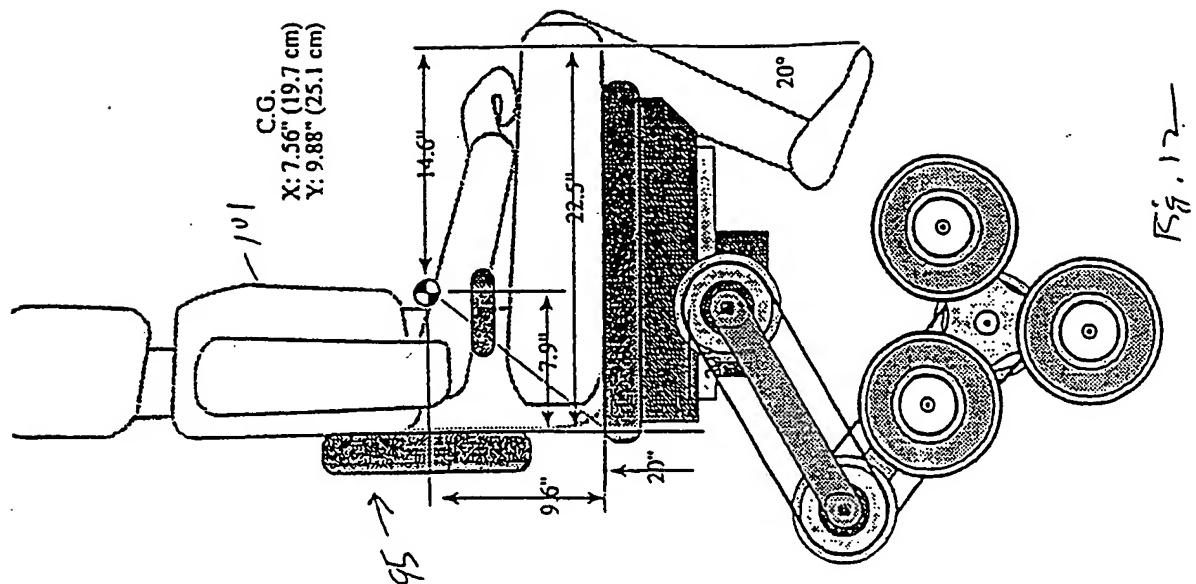
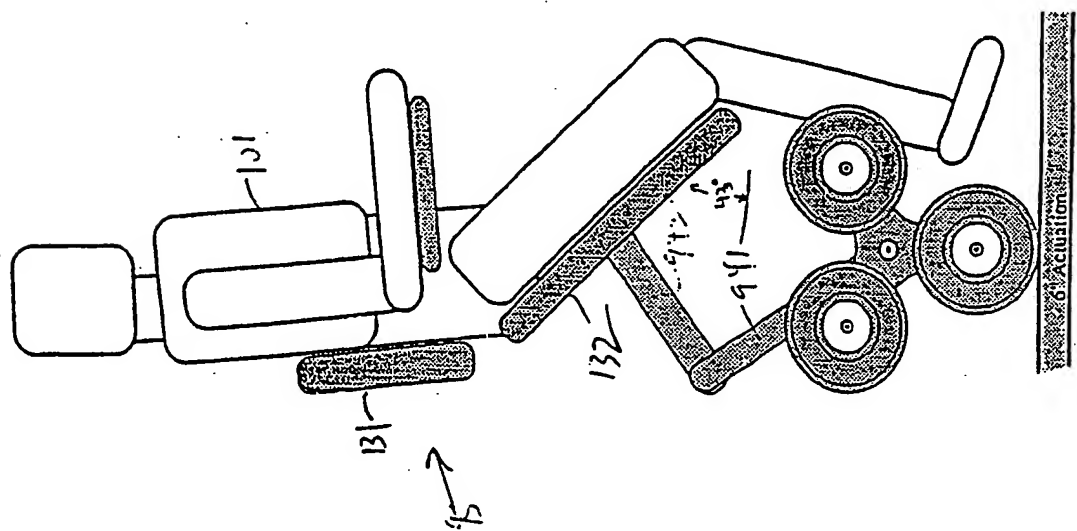
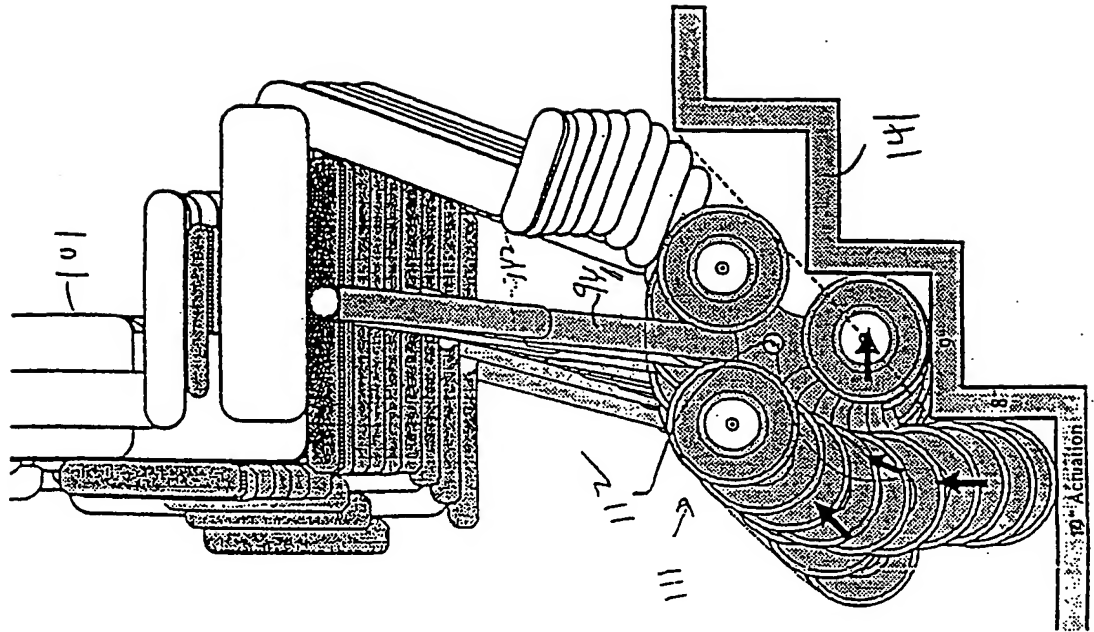
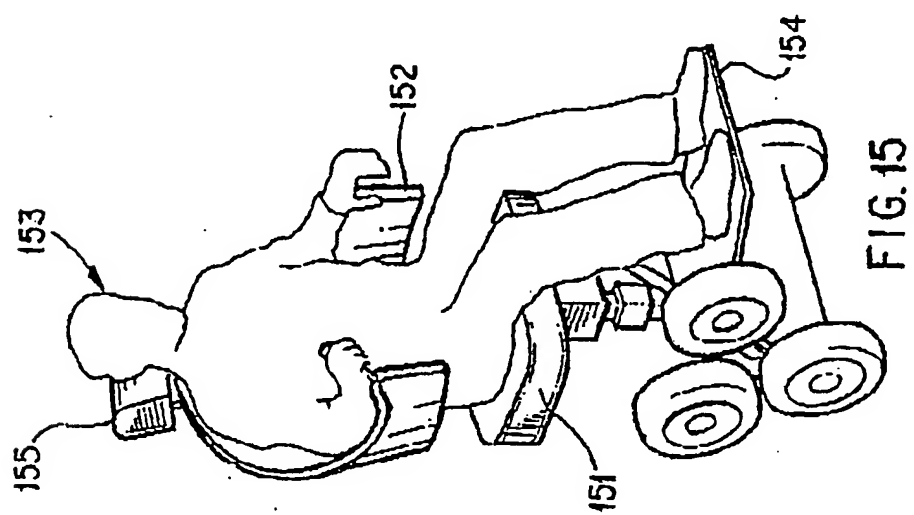
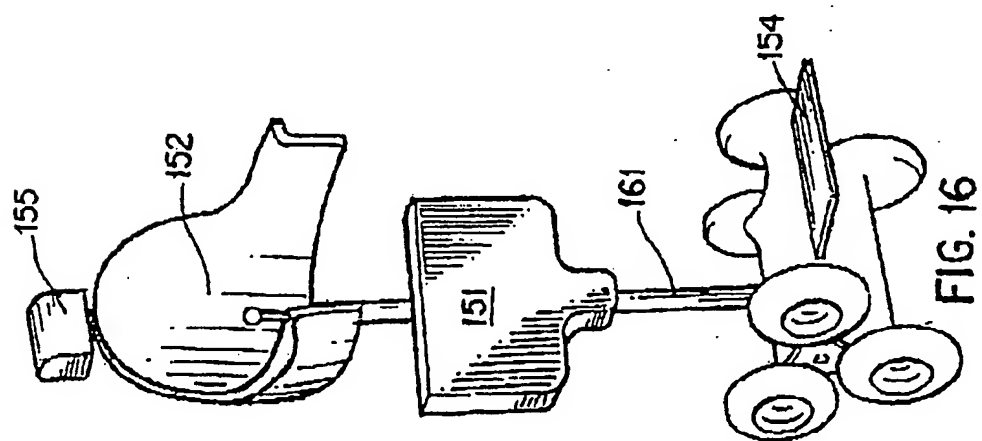
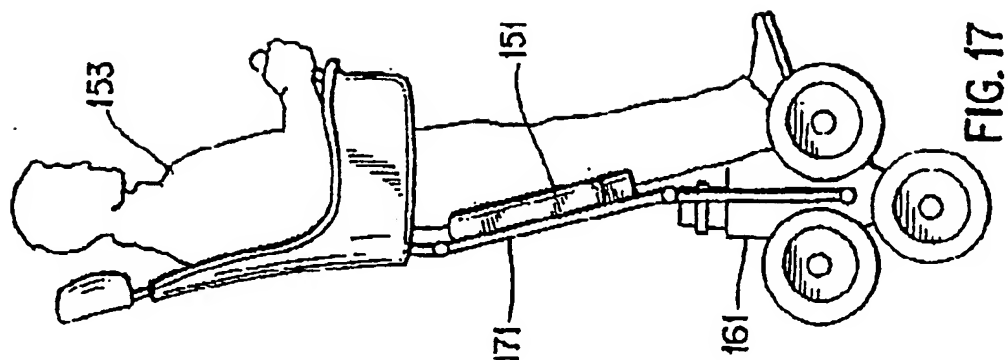



Figure 8









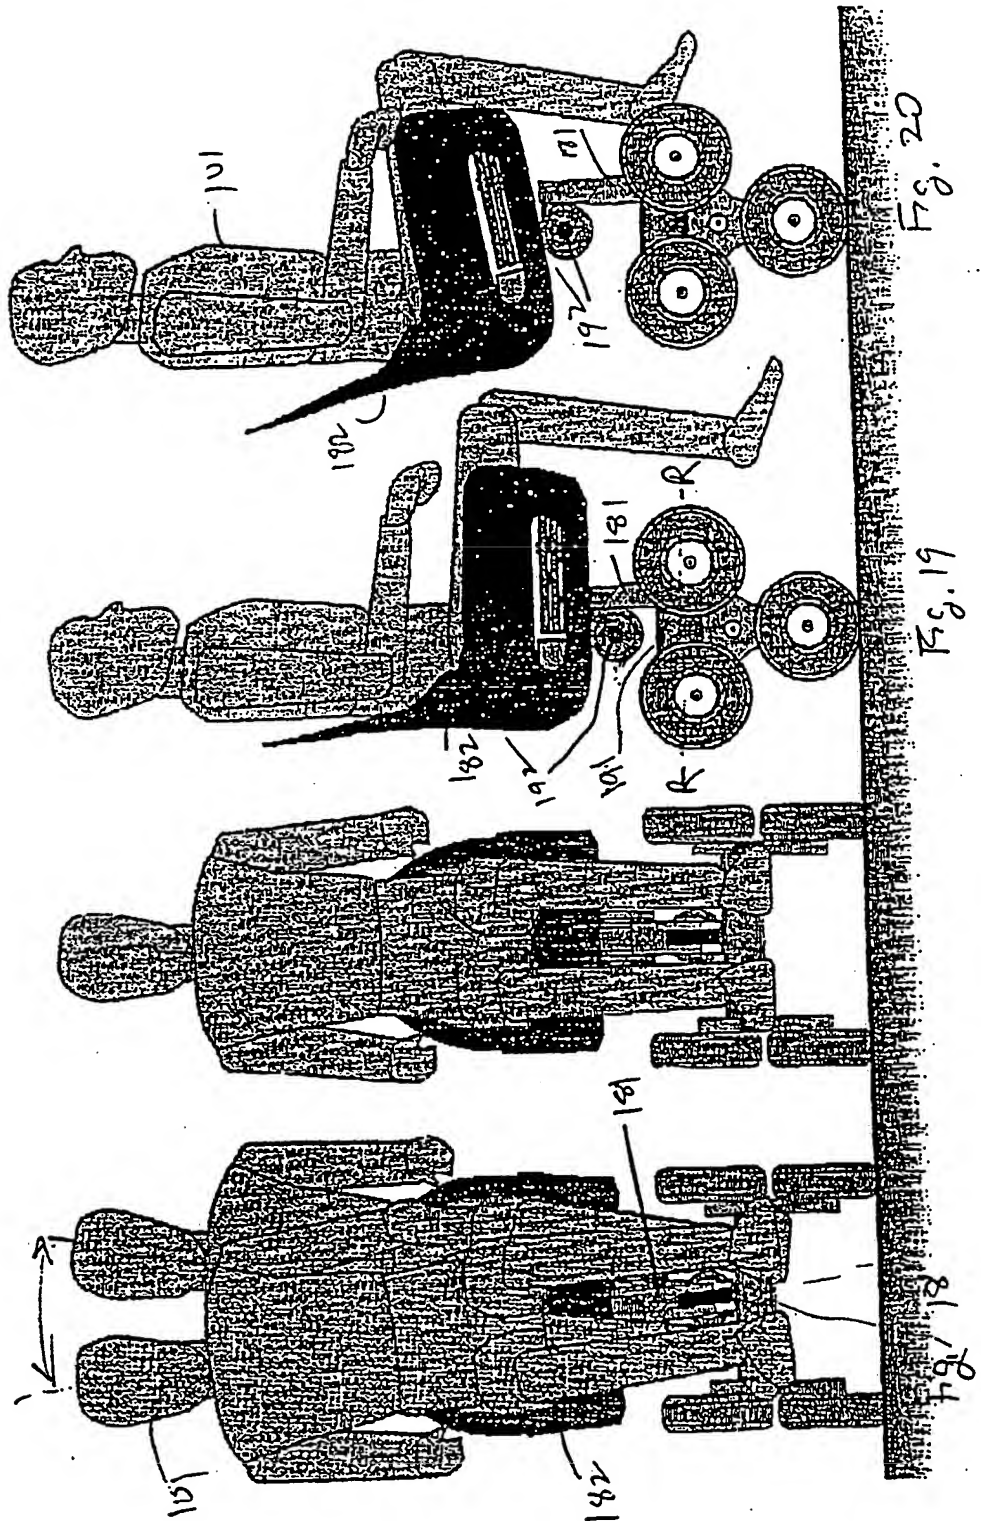

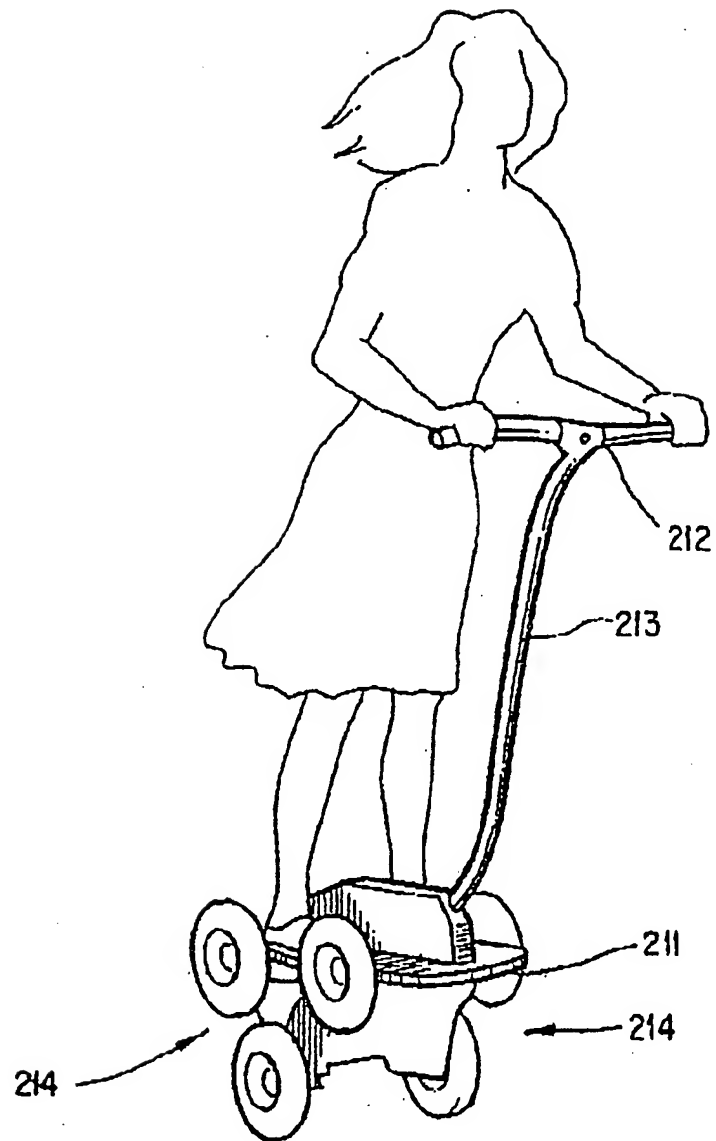
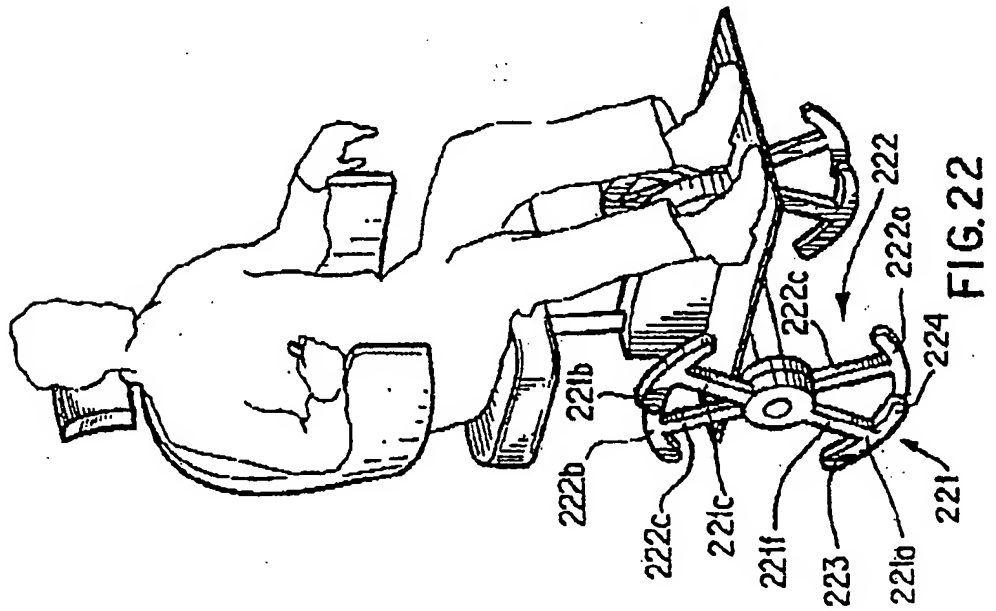
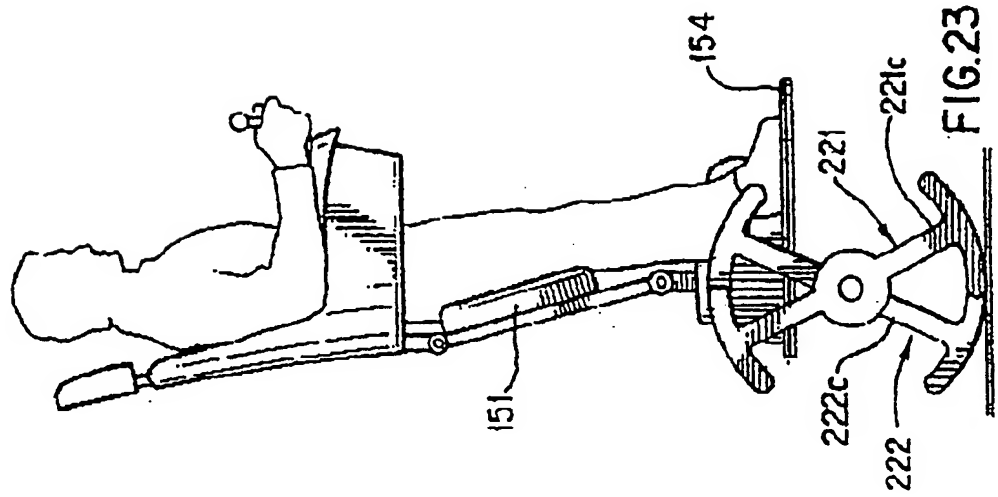


FIG. 21





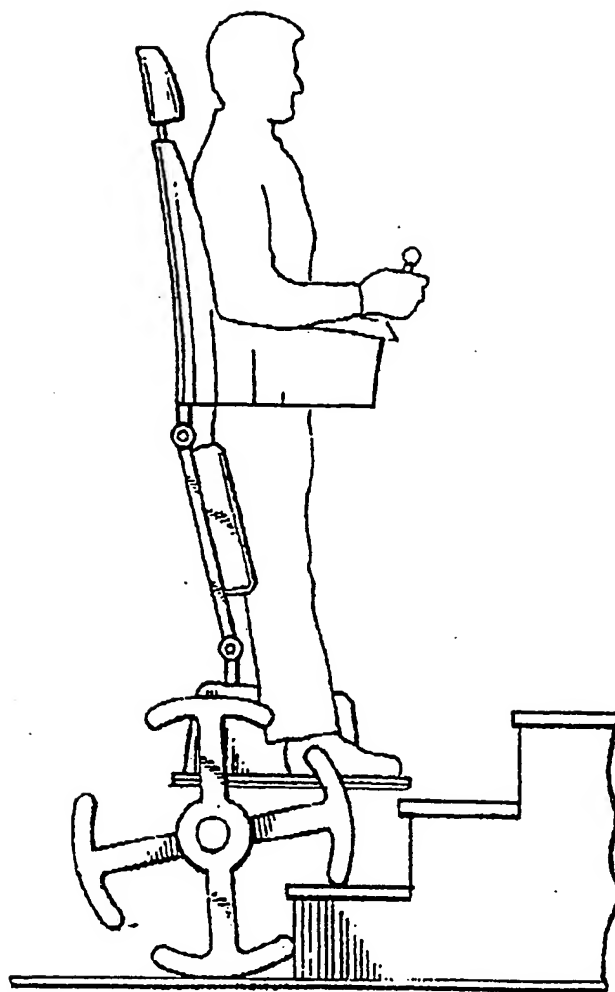


FIG. 24

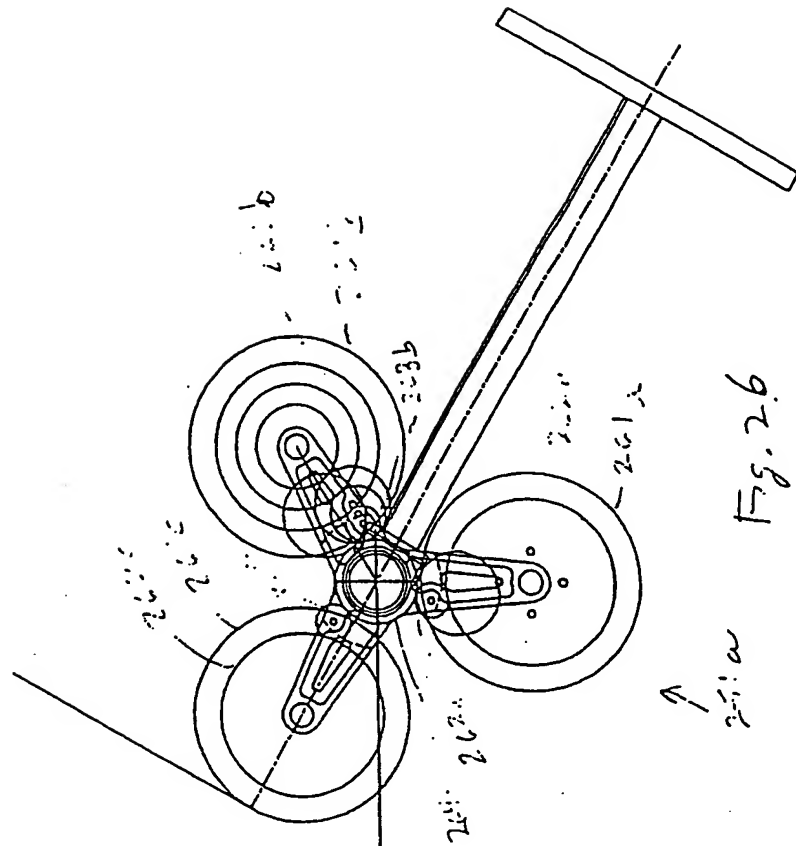


Fig. 26

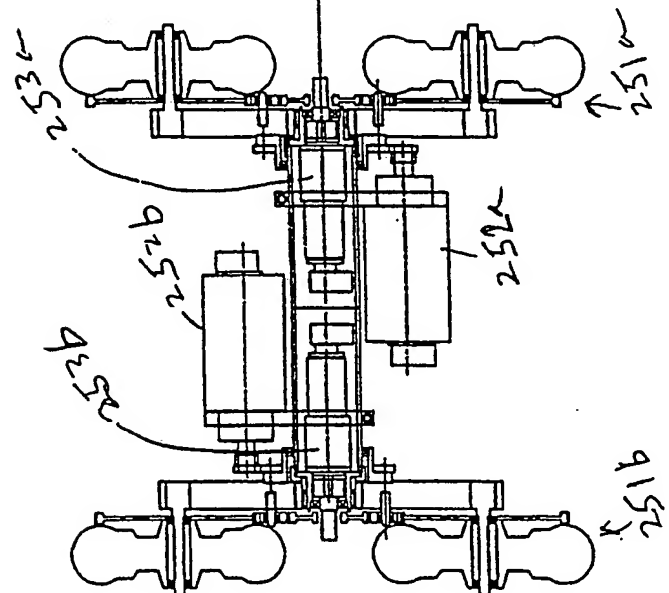


Fig. 25

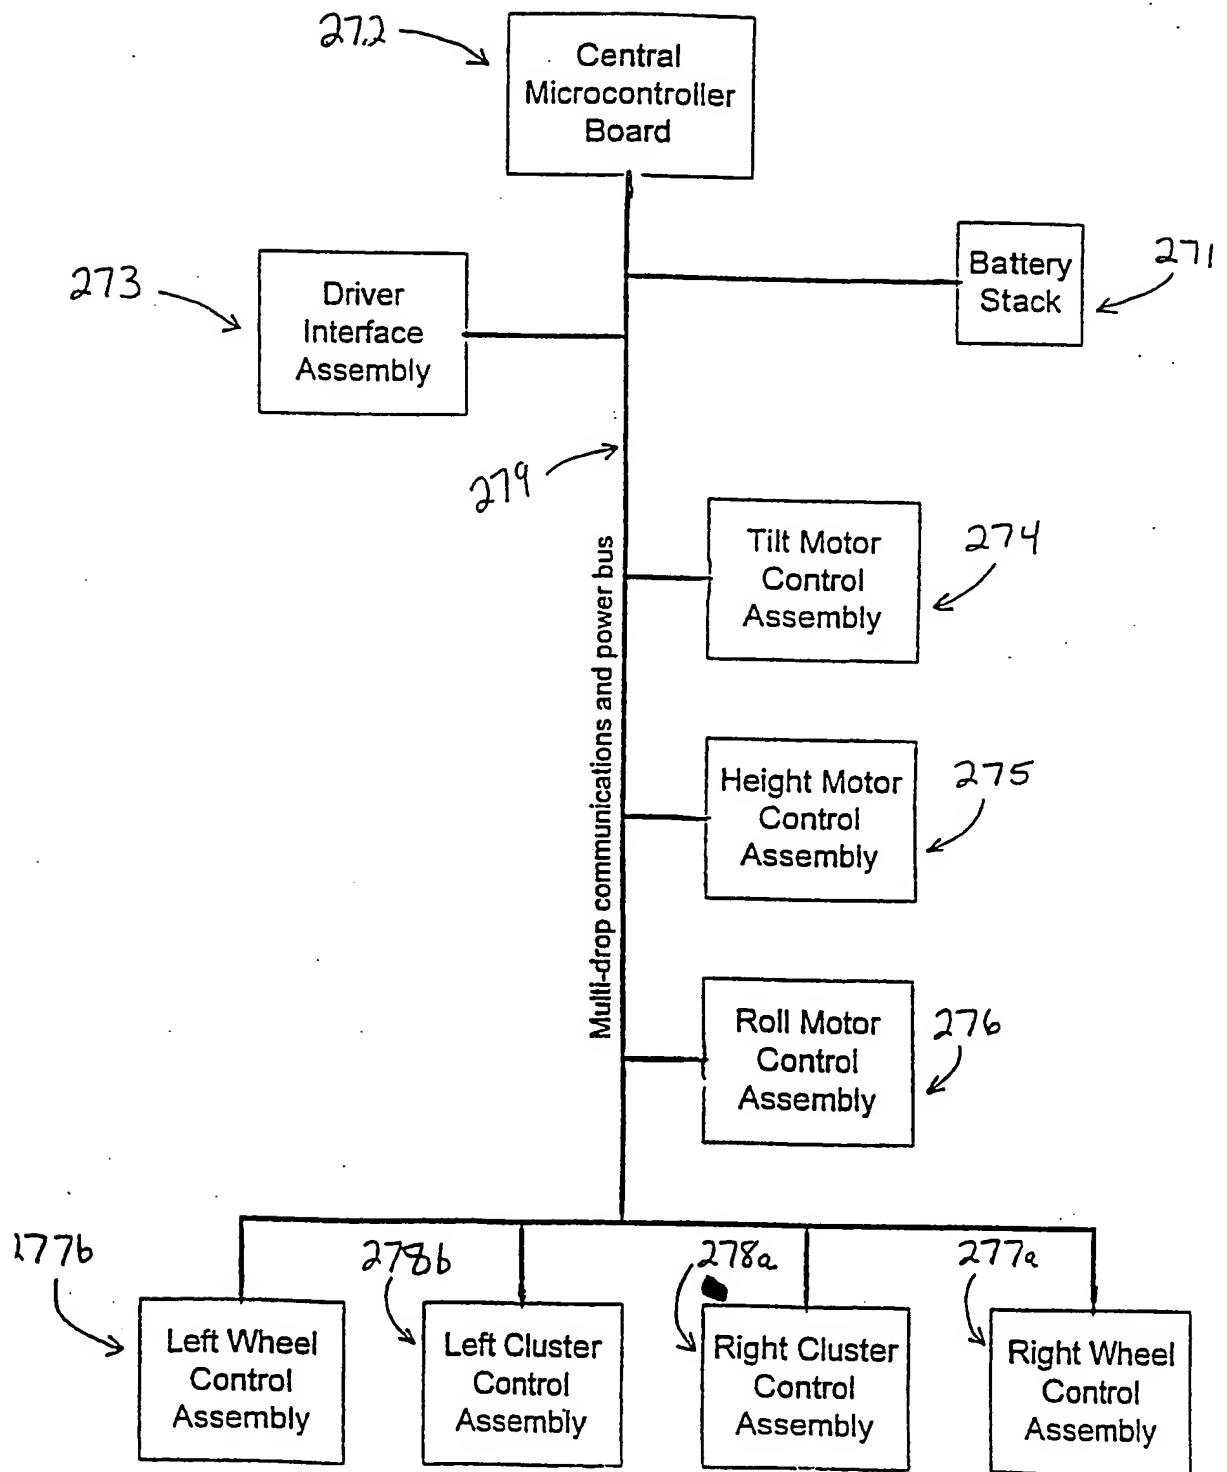


Fig. 27

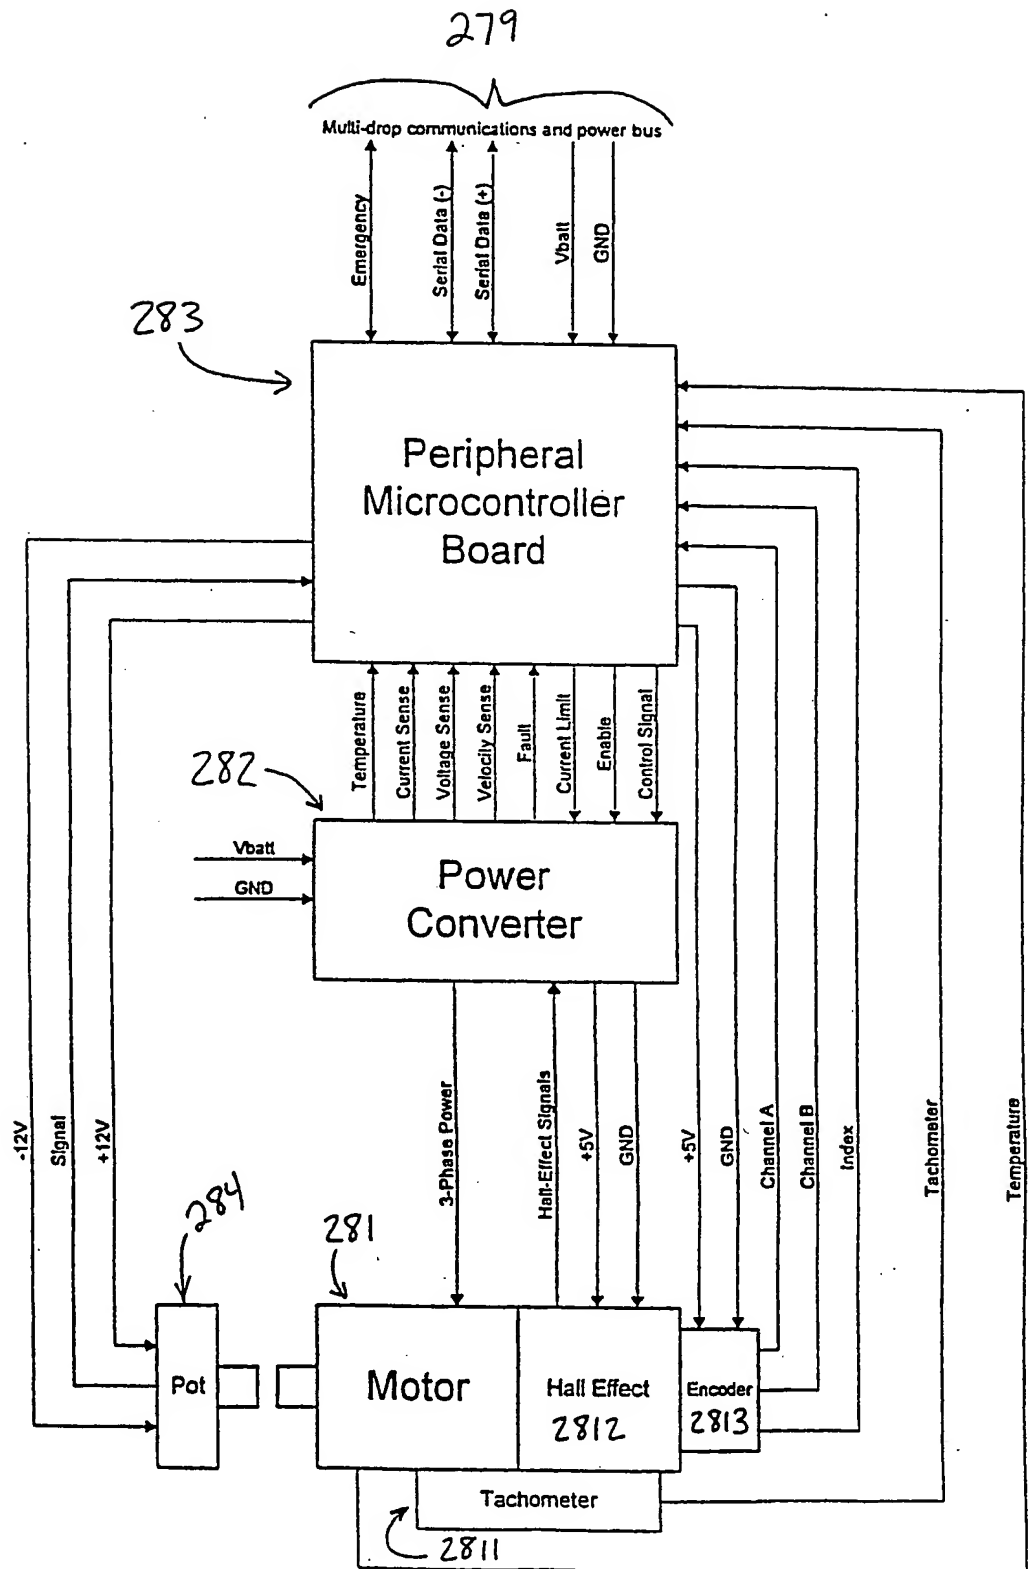
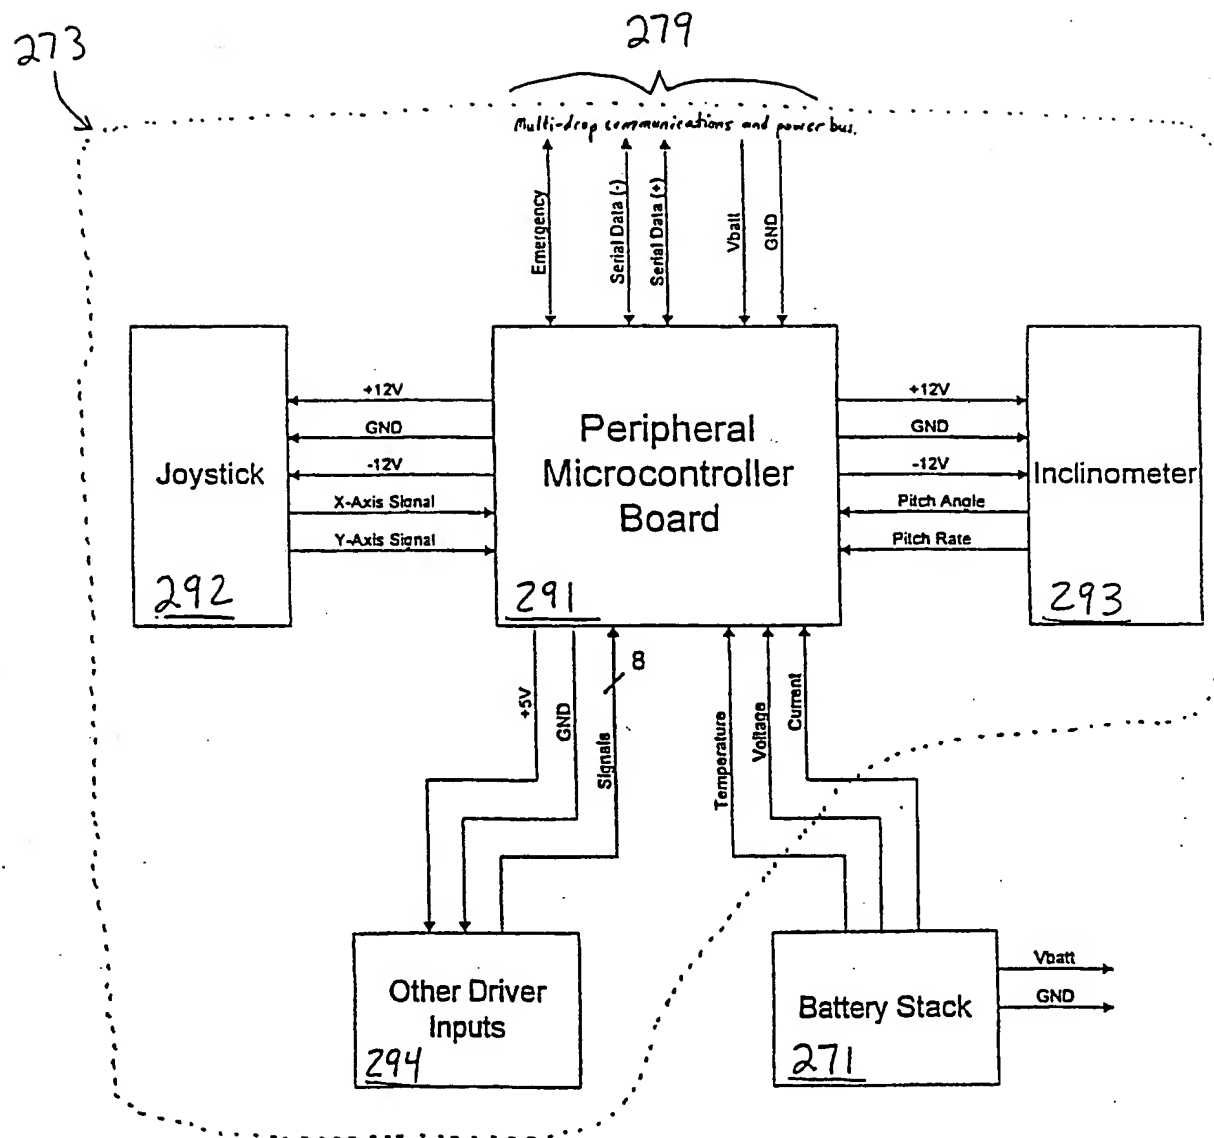


Fig 28





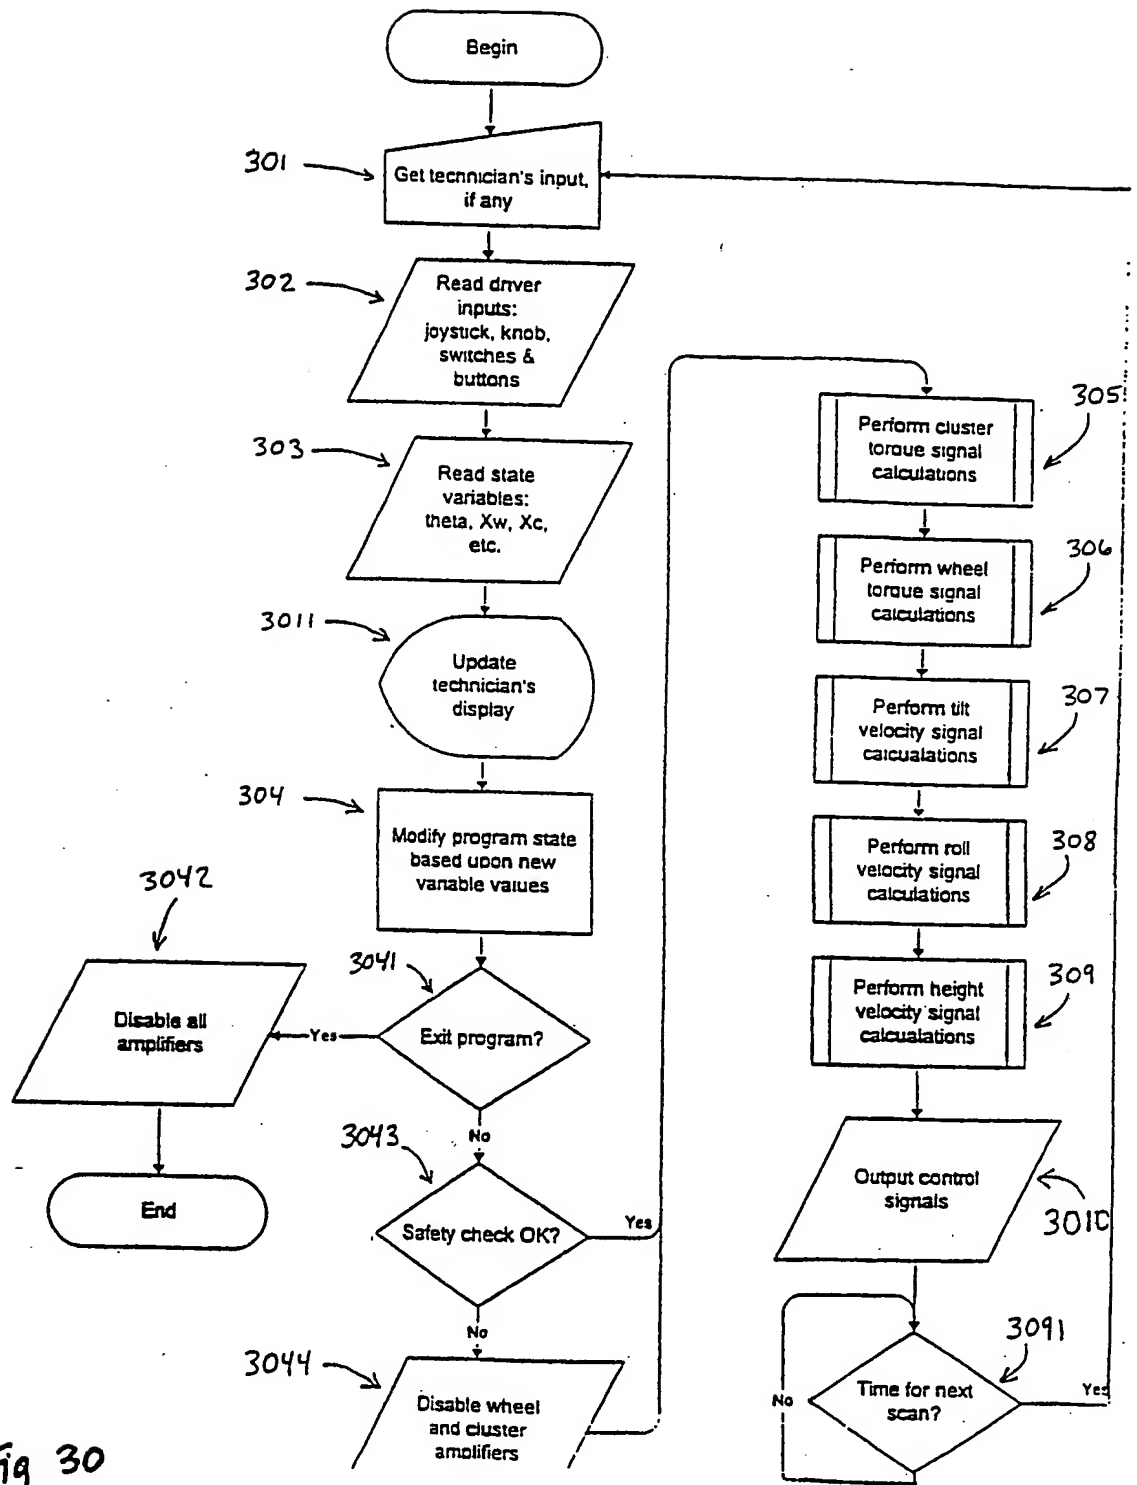


Fig 30



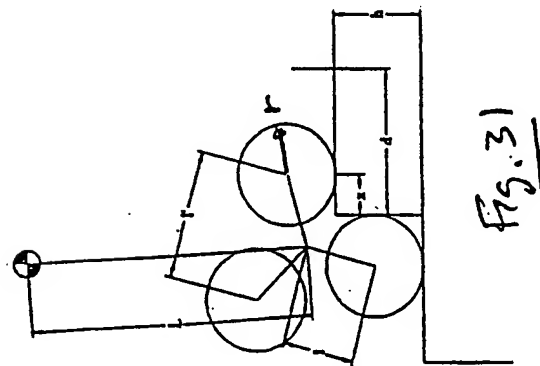


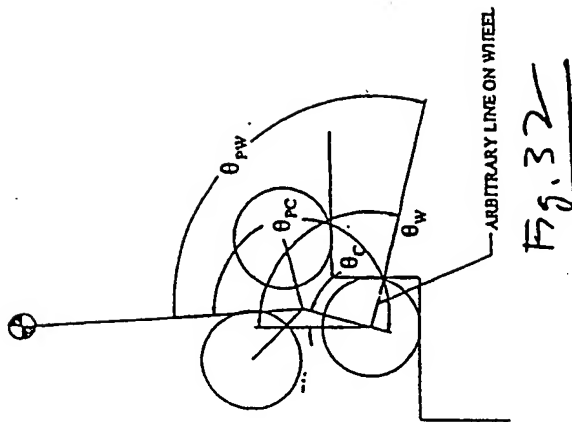

CONTROLLER BLOCK DIAGRAM, BALANCE MODE

Fig. 35

STATE VARIABLE COMPENSATION FOR CLUSTER POSITION

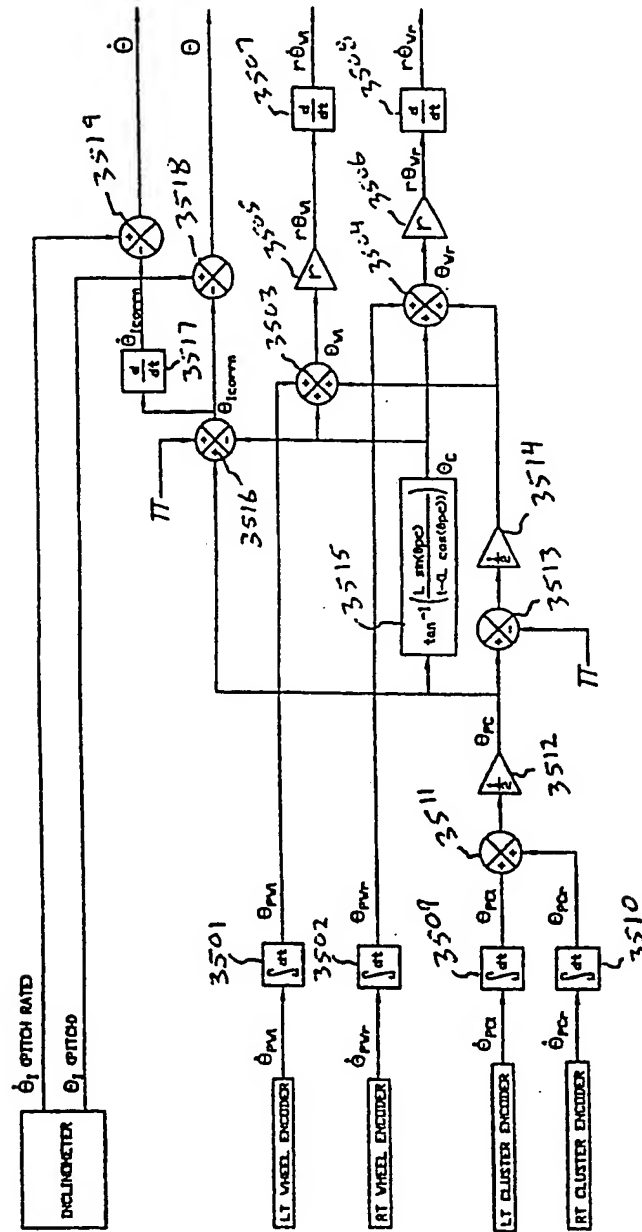

TO BALANCE MODE WHEEL CONTROL

Fig. 36

CONTROLLER BLOCK DIAGRAM: LEAN MODE

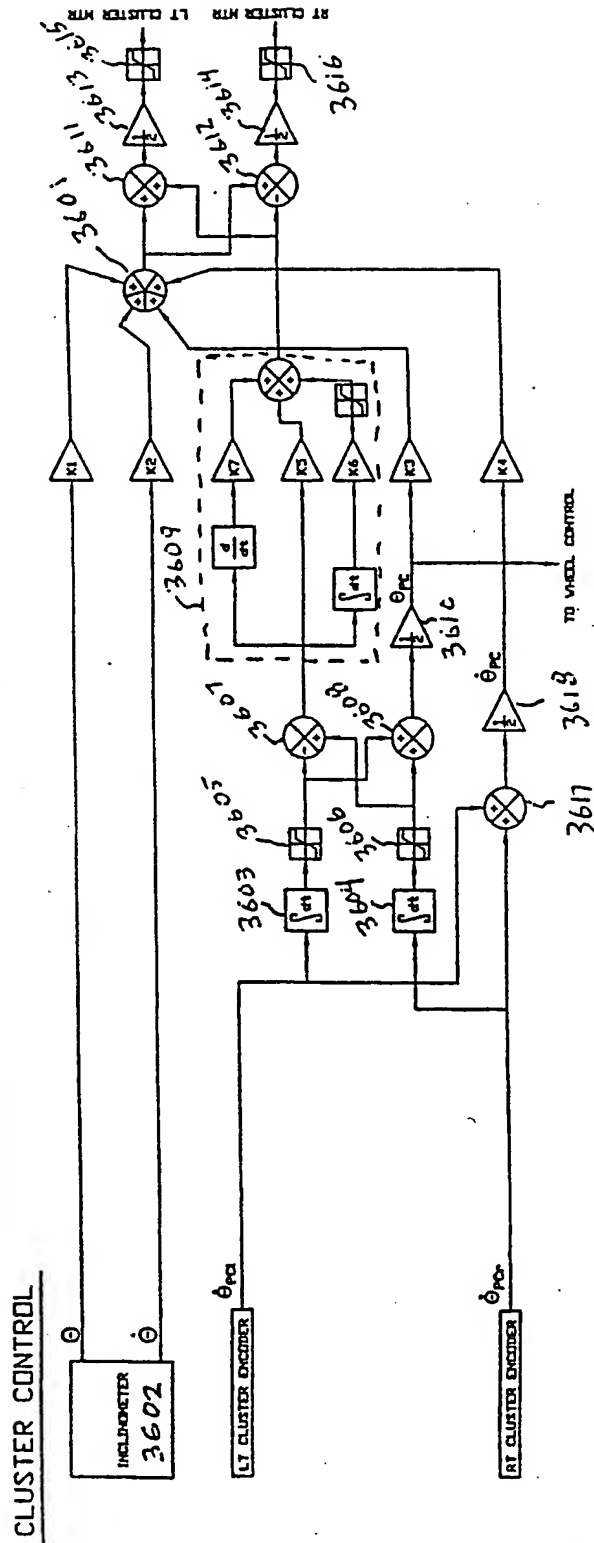
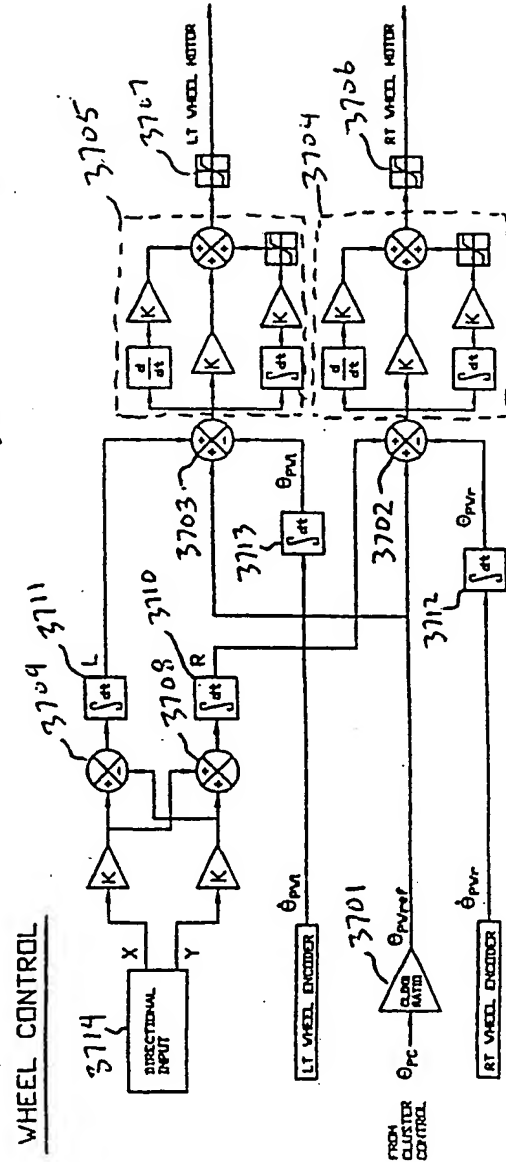
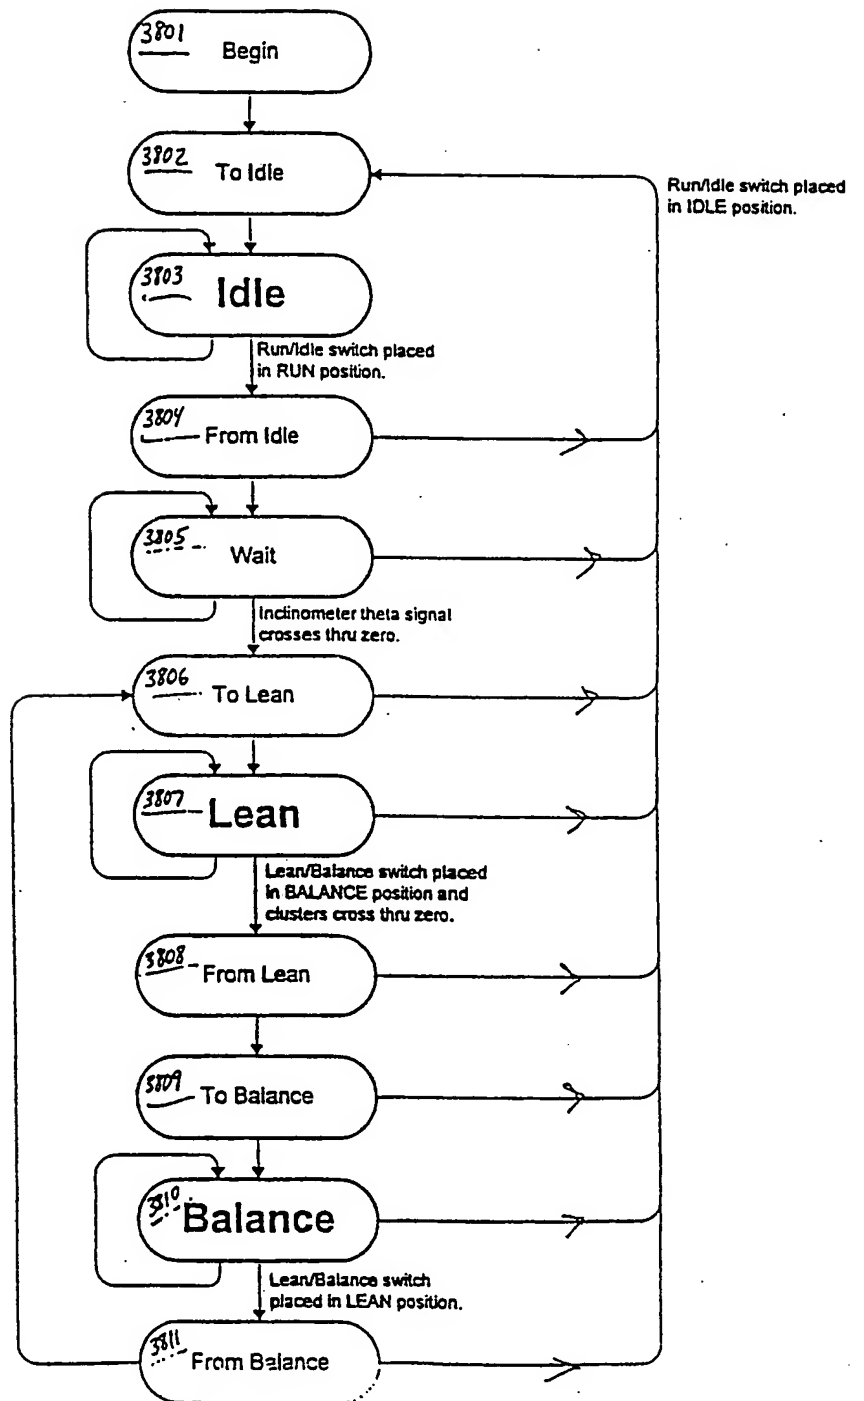
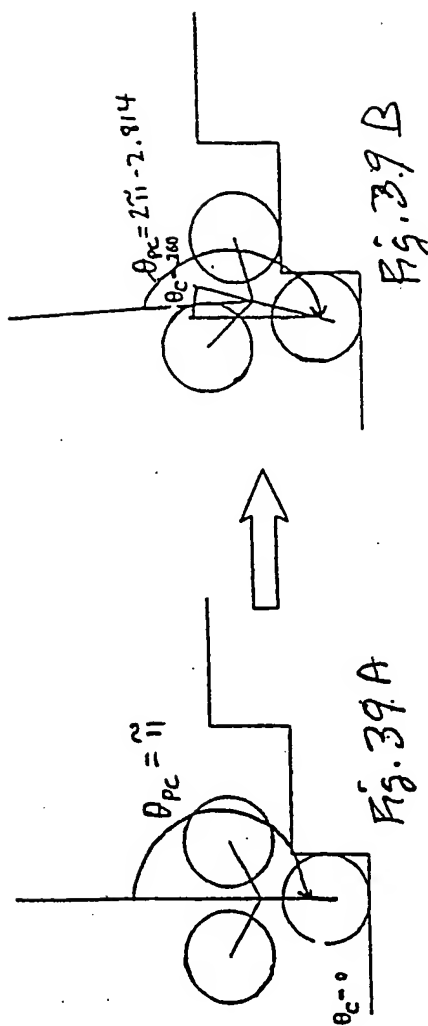
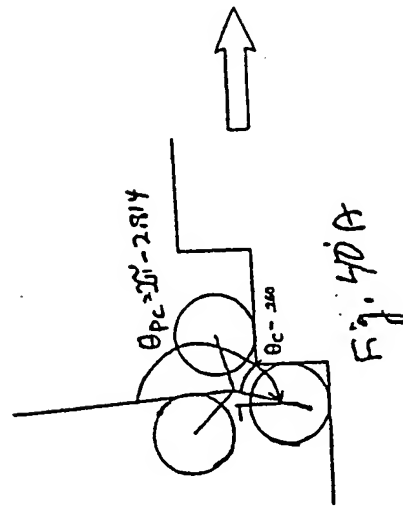
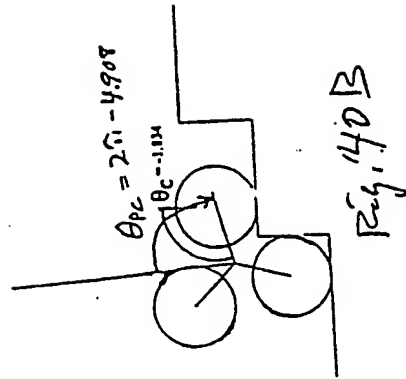



Fig. 37









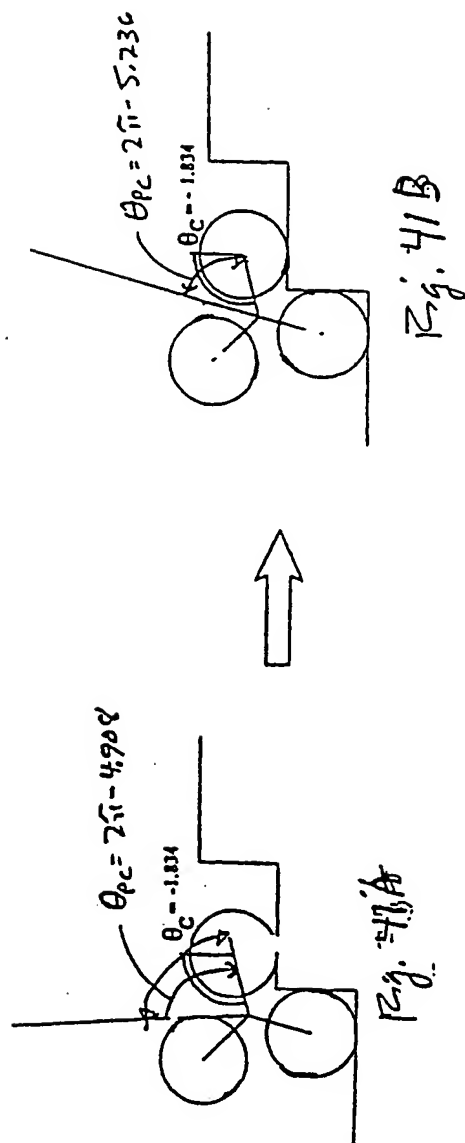


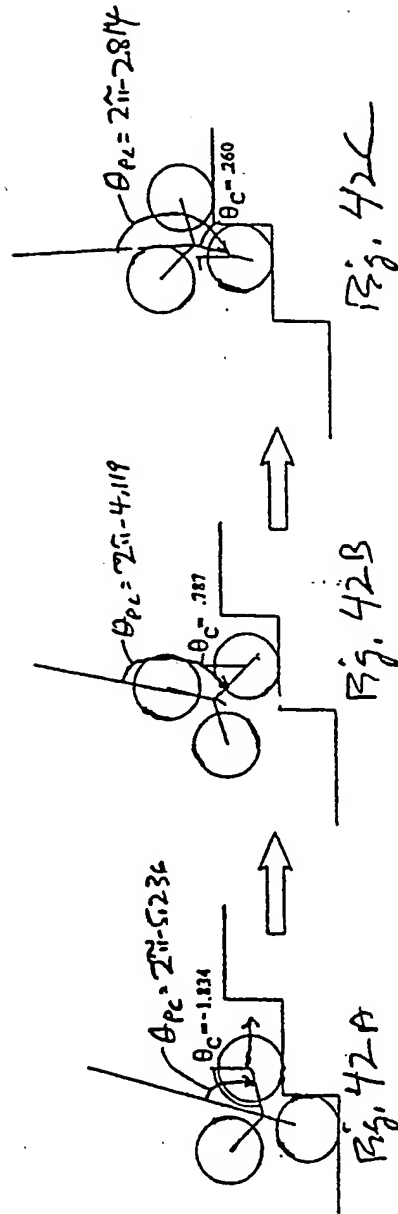







Fig. 44

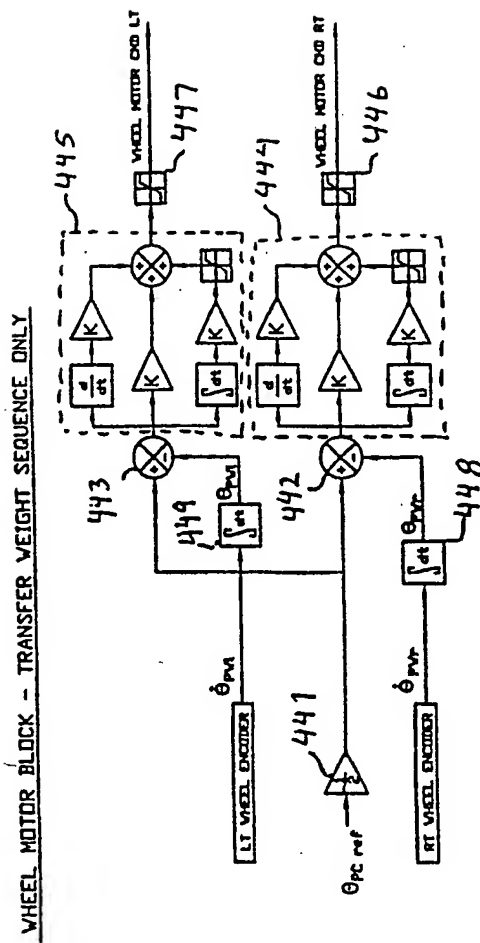

STAR WHEEL - STAIR CLIMBING ALGORITHM

Fig. 45

CLIMB

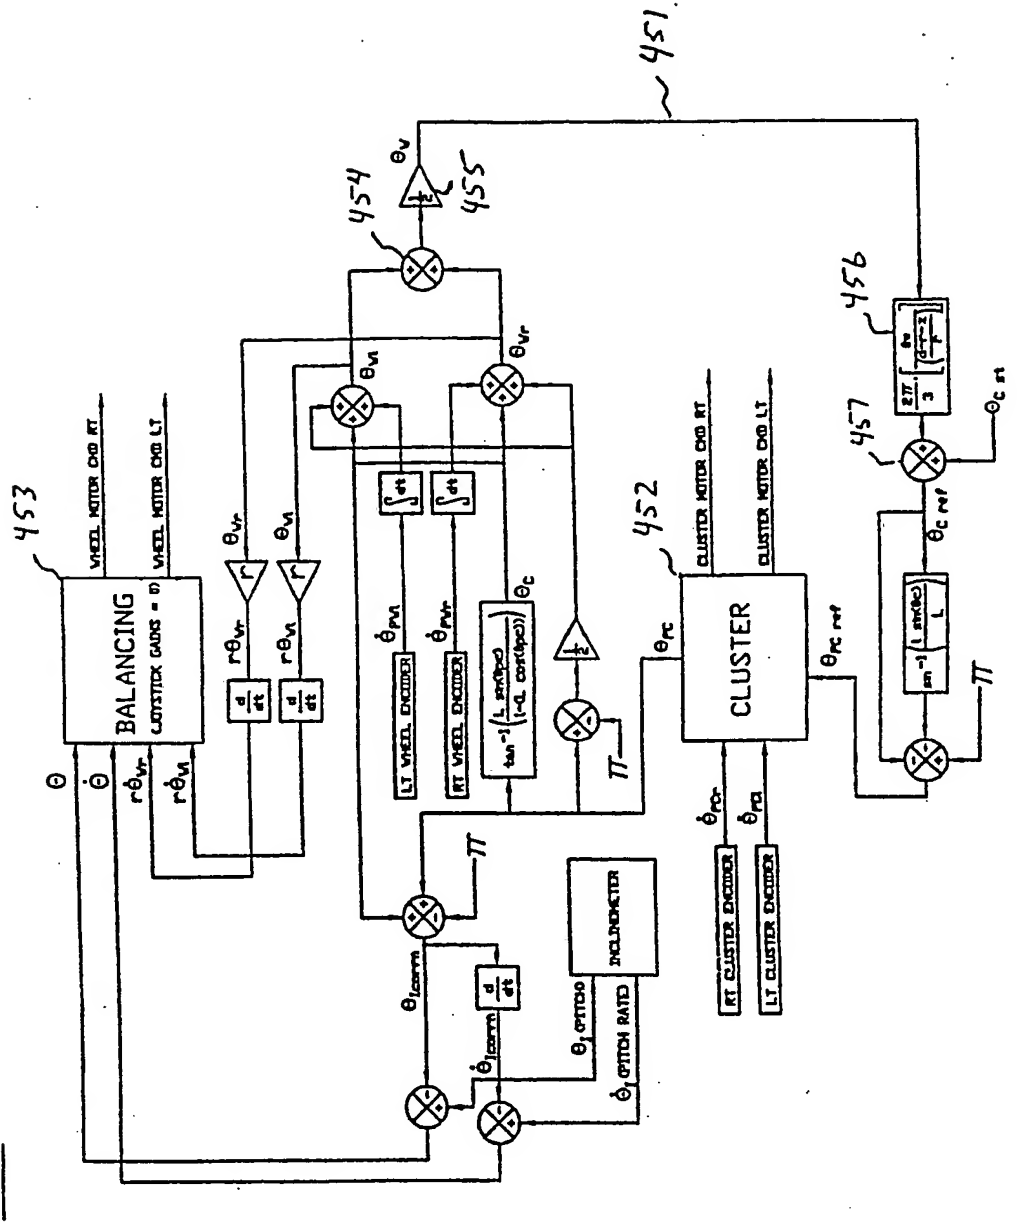

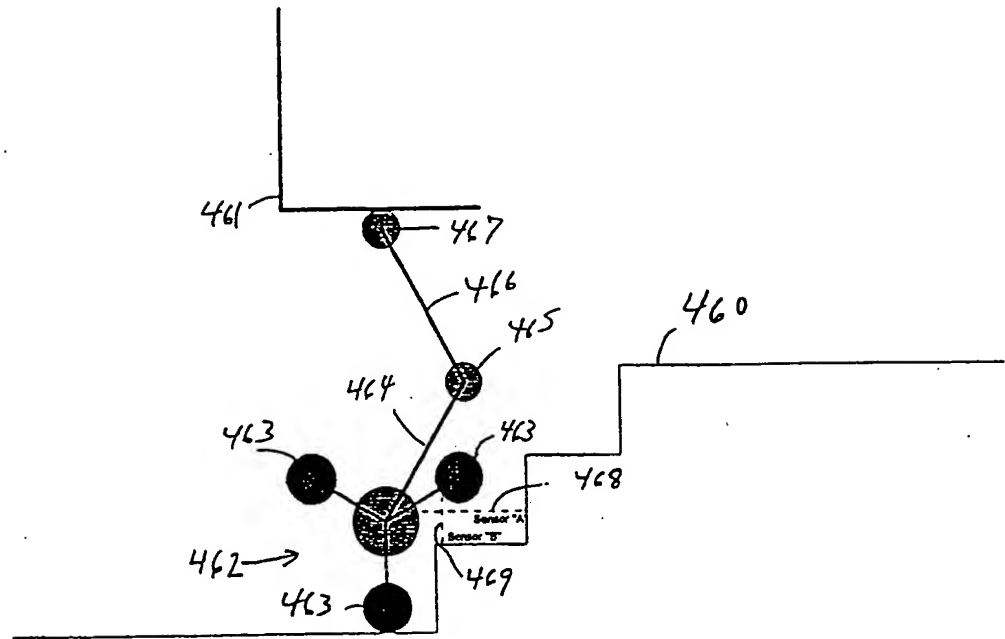


Fig. 46

Diagram 1

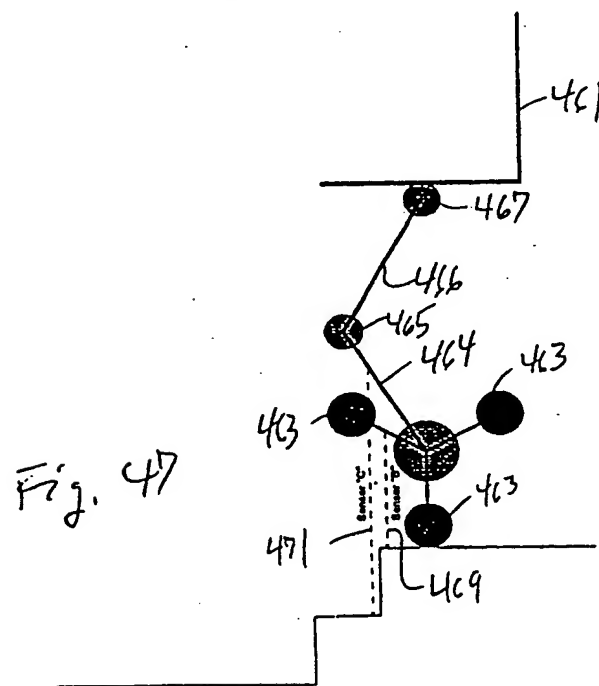
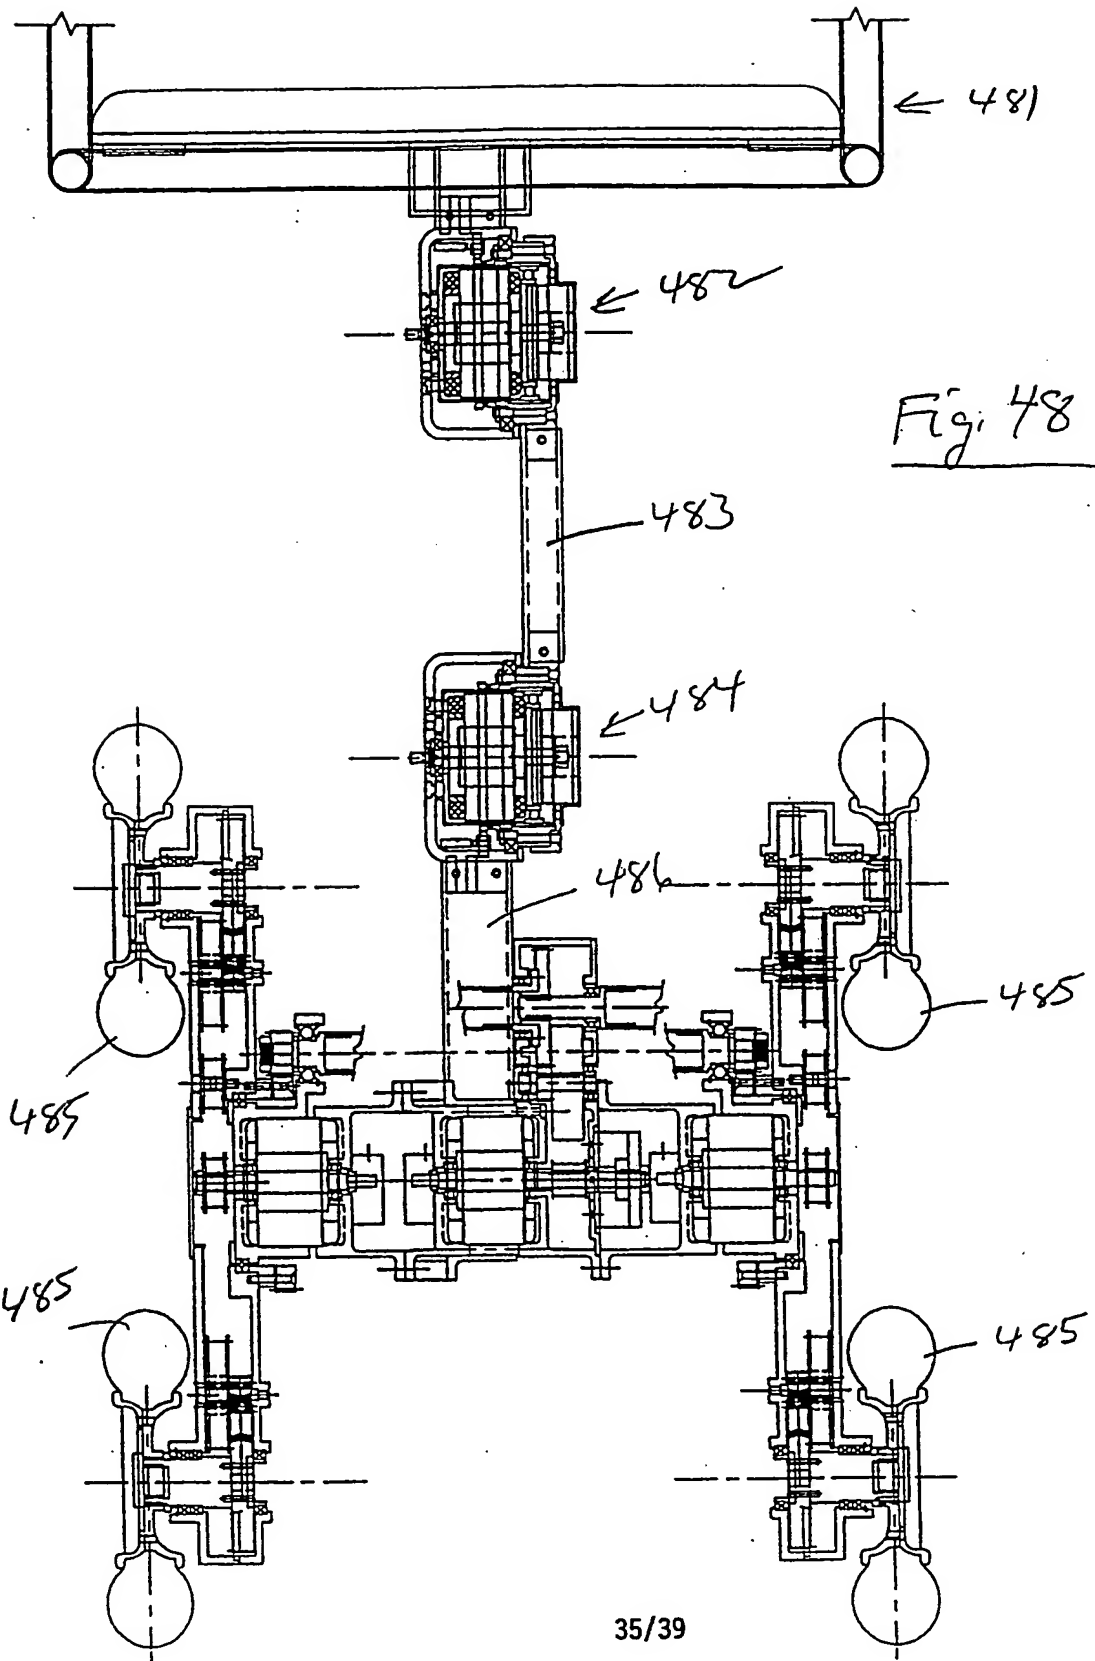


Fig. 47

Diagram 2



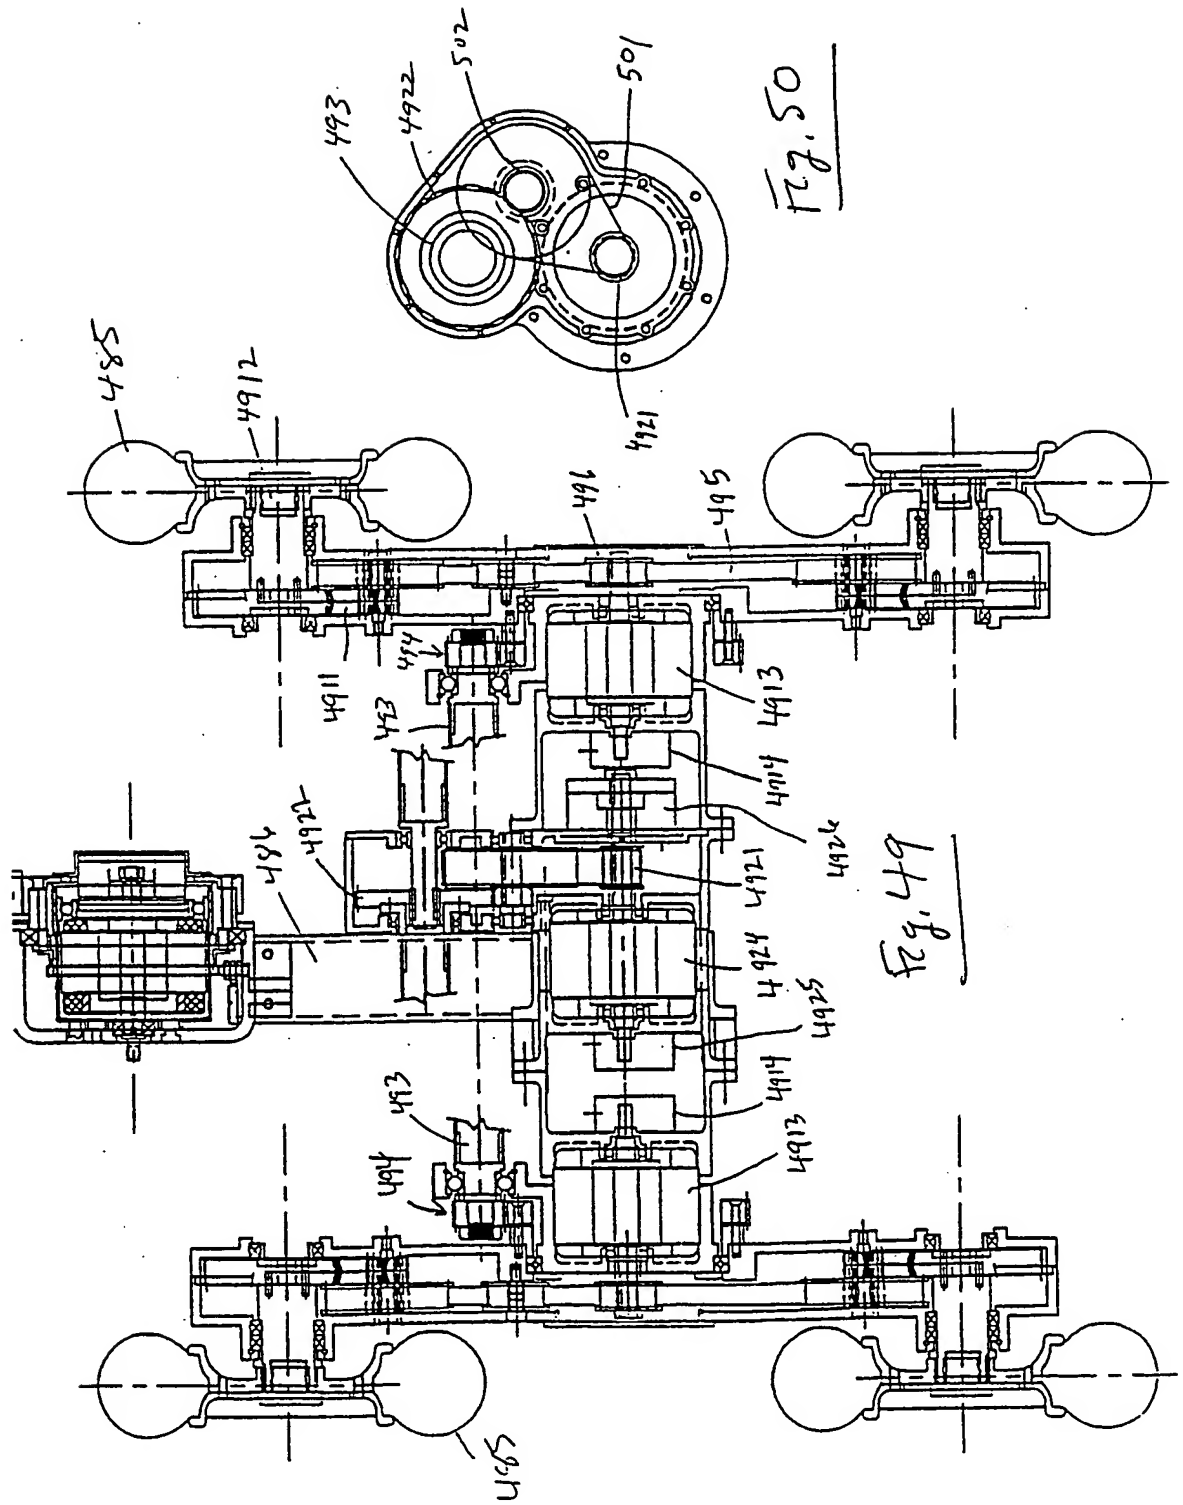


Fig. 51

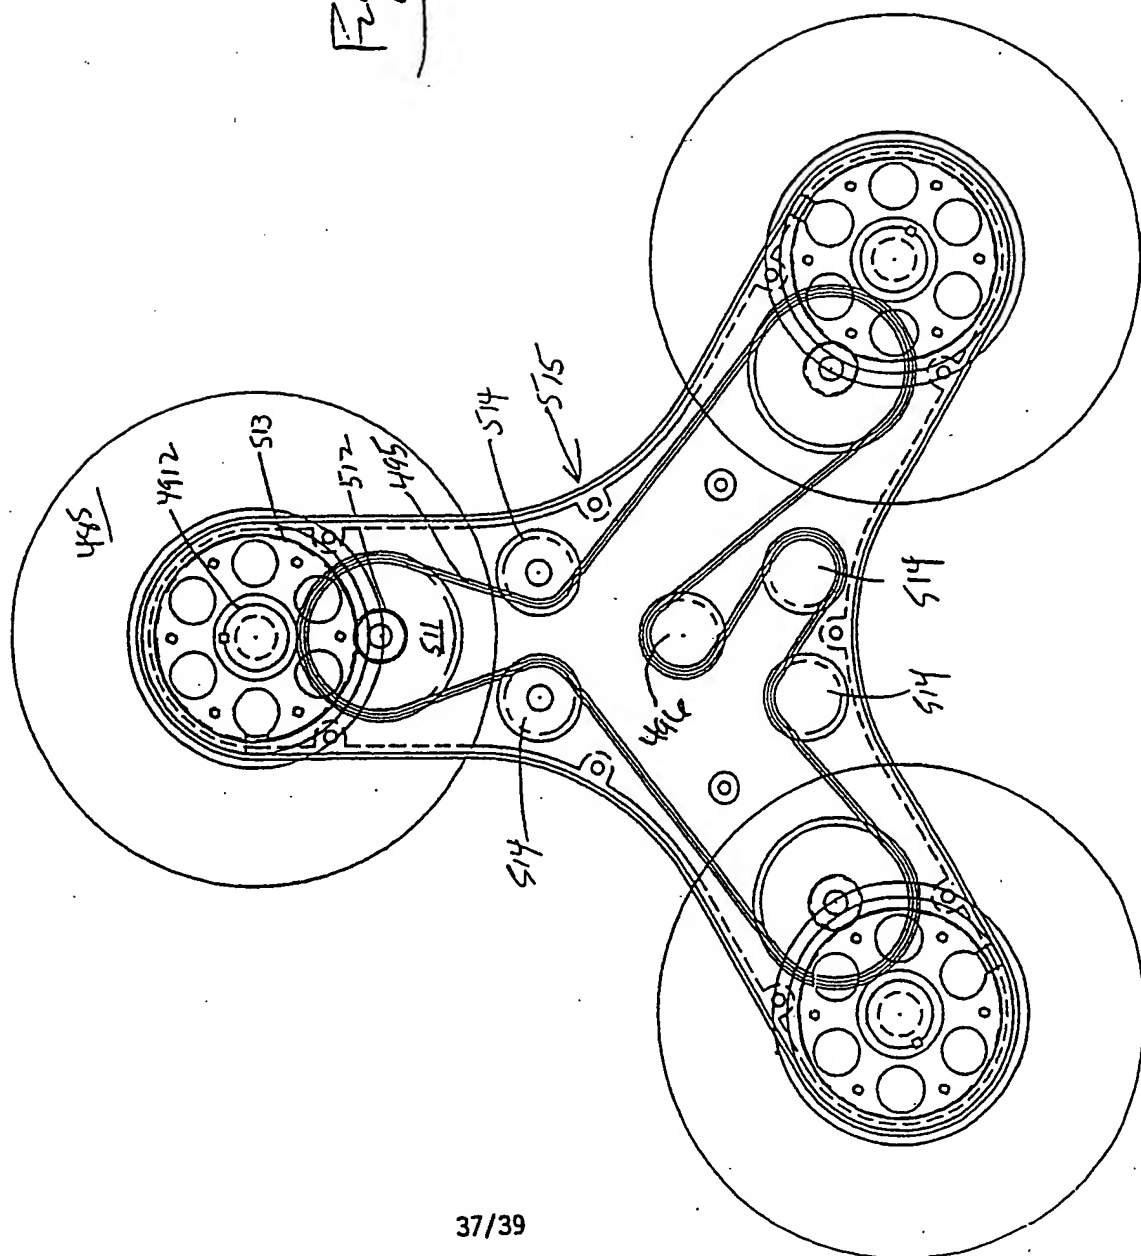
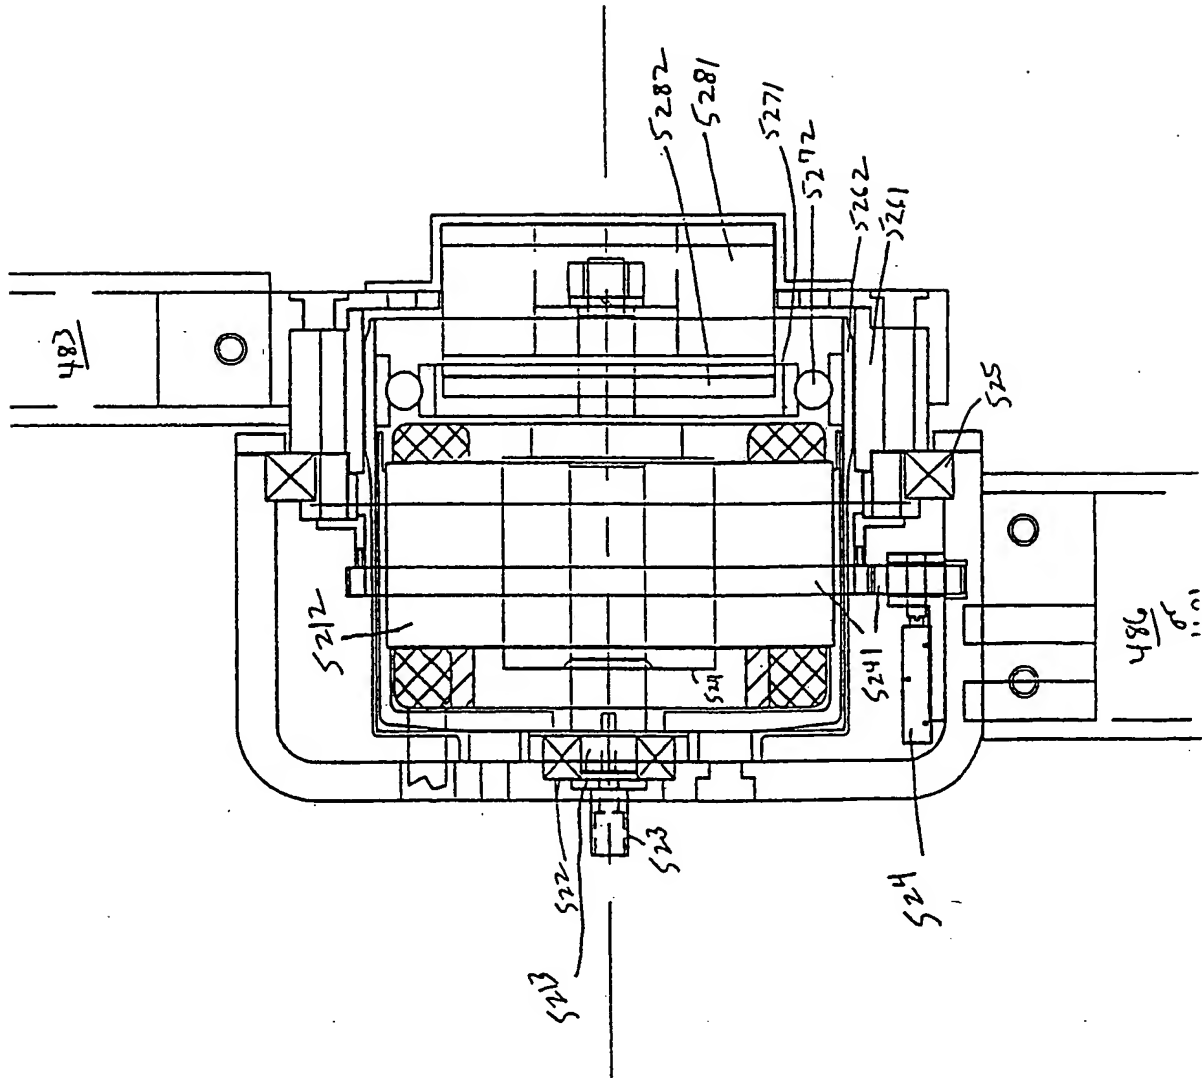


Fig. 52



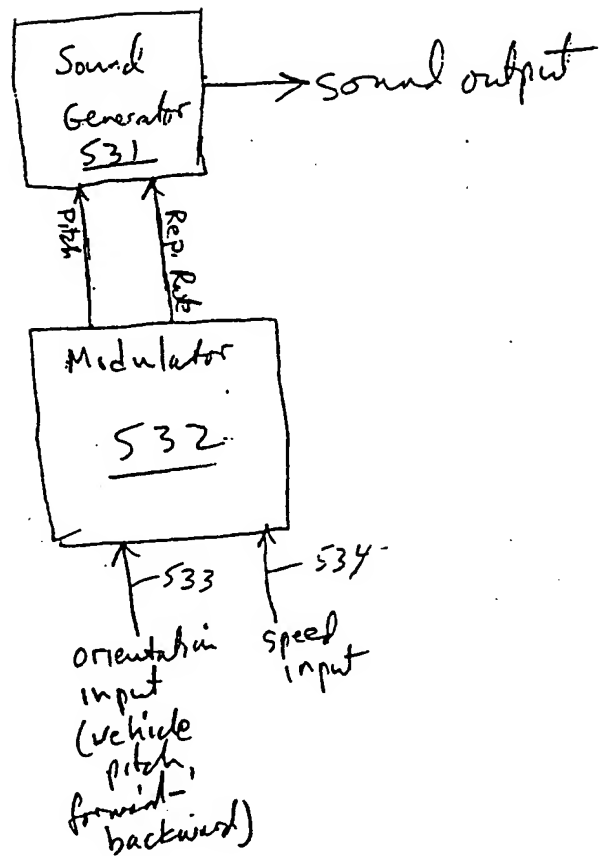


Fig. 53



## INTERNATIONAL SEARCH REPORT

Inter national Application No  
PCT/US 95/01522

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61G5/04 A61G5/06 B62K17/00 B60B19/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61G B62K B60B B62D B60K B62B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,89 06117 (RIX) 13 July 1989  see page 7, line 26 - page 10, line 31; figures ---	1-4, 50, 69, 78, 79
A	EP,A,0 193 473 (BRUNET) 3 September 1986  see the whole document ---	3, 5-7, 9, 16, 64-66, 80
A	DE,A,20 48 593 (LIPFERT) 6 May 1971 see page 23, line 4 - line 18; figures 20-22 ---	10, 68
A	GB,A,152 664 (GARANZINI) 16 February 1922 see claims; figures ---	10, 68
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 November 1995

Date of mailing of the international search report

21. 11. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Baert, F